BUILD PLAN SKETCH, PLAN NOT YET BUILT

SeedLine · github.com/BoujeeEnjinia1701/seedline

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Kit 1.9 detailed model; SDL-DEC-001 F1 to F8	2026-10-24	AC

TOP VIEW

Scale 1:1; looking down (along -Z)

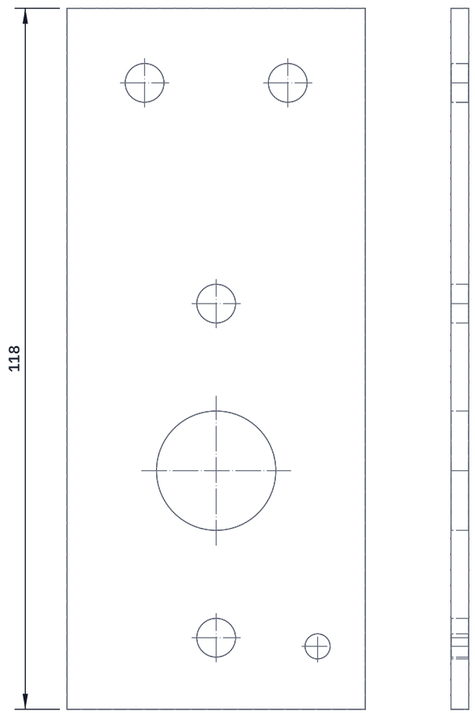

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

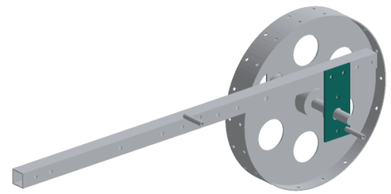

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 50 x 117.5 mm blanks of 3 mm plate; round the corners 3 mm.
Measure down from the top edge and sideways from the centre line:
rail bolts 6.5 mm at 12.5 down, 12 each side of centre;
axle hole 20 mm at 77.5 down, centred;
bearing bolts 6.5 mm at 49.5 and 105.5 down, centred.
Chain-side plate only: drill 4.2 mm and tap M5 at 107 down, 17 mm forward of centre, for the guard spacer screw.
Drill the pair clamped together for the shared holes.
Fit: on the outside face of each rail, top edge flush with the rail top, centred on the drive axle 80 mm behind the rail front; the axle bearing bolts flat to its inside face.
Check: the axle hole lines up across both plates (sight through).

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine front drop plate (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-105	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Steel plate 3 mm, S235 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand