BUILD PLAN SKETCH, PLAN NOT YET BUILT

SeedLine · github.com/BoujeeEnjinia1701/seedline

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Kit 1.9 detailed model; SDL-DEC-001 F1 to F8	2026-10-24	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

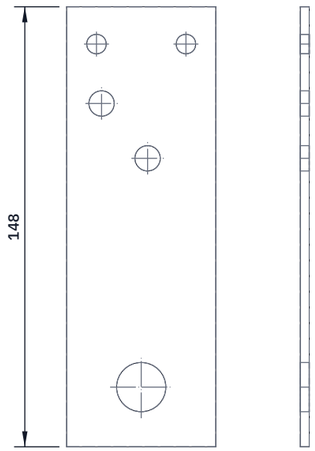

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

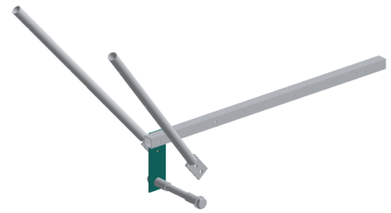

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 50 x 147.5 mm blanks of 3 mm plate; round the corners 3 mm.
Measure down from the top edge and sideways from the centre line:
rail bolts 6.5 mm at 12.5 down, 15 each side of centre;
press axle hole 16.5 mm at 127.5 down, centred;
handle bolts 8.5 mm at 32.4 down, 13.3 to the rear of centre,
and at 50.8 down, 2.1 forward of centre.
Drill the pair clamped together.
Fit: on the outside face of each rail, top edge flush with the rail top,
centred 660 mm behind the rail front. The flattened lower end of a
handle tube bolts flat to its outside face.
Check: the axle hole lines up across both plates.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine rear drop plate (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-106	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Steel plate 3 mm, S235 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand