BUILD PLAN SKETCH, PLAN NOT YET BUILT

SeedLine · github.com/BoujeeEnjinia1701/seedline

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	SDL-DEC-001: 13 mm slot, plate liners, UV-stabilized door	2026-10-02	AC
P3	Kit 1.9 detailed model; SDL-DEC-001 F1 to F8	2026-10-24	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

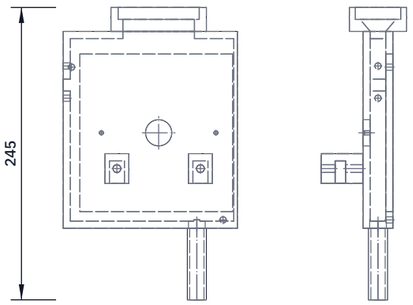

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

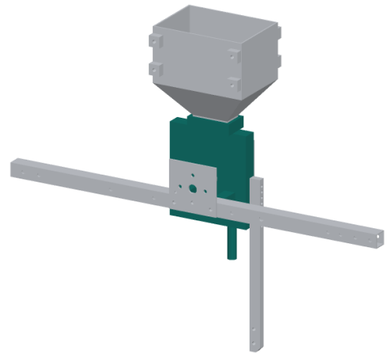

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body 146 long x 25 wide x 165 tall; a 13 mm slot inside holds a 6,
8 or 10 mm plate with its liners; front wall 3 mm, others 6 mm.
On top: a collar 80 x 48 x 20 with a 68 x 38 pocket, 10 deep, and a
funnel from 60 x 30 down to the 60 x 13 slot. The hopper neck drops in.
Chain side: a 22 mm hole for the plate hub; two lugs 20 x 37 x 25 with
6.5 mm holes and an M6 nut slot, 35 mm each side of the shaft.
Door side: an opening 128 x 132; two M4 heat-set inserts in the solid wall,
7 from the rear face 135 up and 134 from it 7 up (door screws).
Rear wall: two M4 inserts on the centre line, 29 and 56 above the shaft (brush).
Rear wall: a 13 x 10 slot 35 to 45 mm above the shaft for the brush.
Chain-side slot wall: two 3.4 mm peg holes, 5 deep, 48 mm each side of the shaft.
Under the outlet: a spigot 16 mm outside, 12 mm bore, 60 long.
Print standing on its bottom face; support the lugs and collar.
Fit: lugs on the chain-side rail's inside face, on the bearing plate
bolts; the plate turns in the slot without touching.
Check: a 6 mm plate with both liners turns in the slot, door on.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine metering housing: making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-112	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

PETG, 3D printed, 4 walls, 40 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand