REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Kit 1.9 detailed model; SDL-DEC-001 F1 to F8	2026-10-24	AC

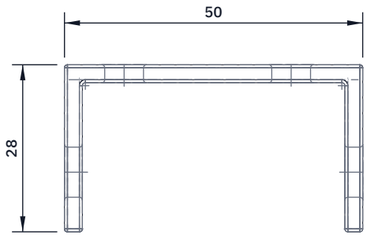

TOP VIEW

Scale 1:1; looking down (along -Z)

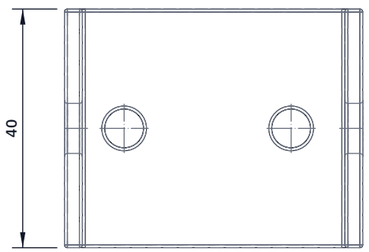

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 100 mm of 40 x 3 strip. Bend 25 mm at each end to 90 degrees, same way, to make a U: base 50 mm, two lugs 25 mm.
Base: two 6.5 mm holes, 10 and 38 mm from the rear end, centred.
Lugs: one 8.4 mm hole each, 15 mm from the base face, centred.
Fit: base flat on the outside of the chain-side rail at its front end, lugs pointing outward; two M6 bolts through the rail.
The arm pivots on an M8 pin through both lugs with a 12 mm spacer each side of the arm; it folds up and is held by a spring clip.
Check: the arm swings up and down freely and stops level.

SEEDLINE github.com/BoujeeEnjinia1701/seedline

SeedLine row marker mount (row-spacing kit): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-123	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
Steel strip 40 x 3 mm, bent

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand