BUILD PLAN SKETCH, PLAN NOT YET BUILT

SeedLine · github.com/BoujeeEnjinia1701/seedline

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Kit 1.9 detailed model; SDL-DEC-001 F1 to F8	2026-10-24	AC

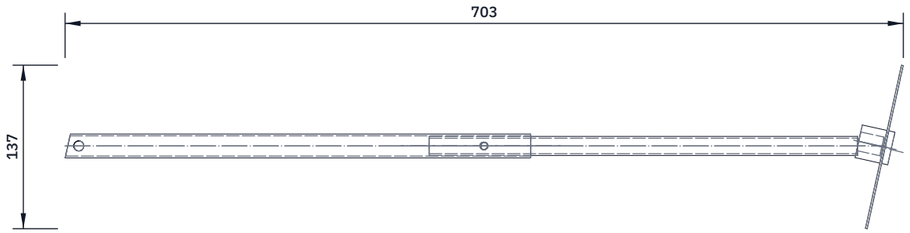

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

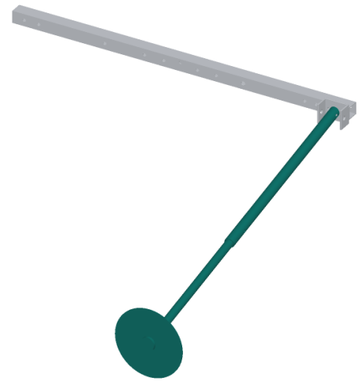

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Outer arm: 380 mm of 20 x 1.5 aluminium tube; 8.4 mm cross hole 12 mm from one end (pivot), that end cut square to clear the mount;
6.5 mm pin holes every 50 mm along the last 250 mm.
Inner arm: 360 mm of 16 x 1.5 tube; 6.5 mm hole near one end; slides in the outer arm for 200 to 900 mm reach; one pin sets it.
Disc: cut a 140 mm disc from 1.5 mm plate, 16.5 mm centre hole; bolt it to a hub of 28 mm bar 28 long, bored 16 mm, which takes the inner arm's end and turns on an M8 bolt.
Set the reach so the disc runs at the next row's centre (750 mm for maize), measured from the row being sown.
Check: disc runs true; the marked line is within 25 mm of the set row.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine row marker arm and disc (row-spacing kit): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-124	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Aluminium tube 20 x 1.5 and 16 x 1.5 mm, 6061-T6; disc 1.5 mm steel plate

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand