
BUILD PLAN SKETCH, PLAN NOT YET BUILT


SinkGrab · github.com/BoujeeEnjinia1701/sinkgrab

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Kit 1.9.1: redrawn from the detailed model (SKG-DEC-001 K1 to K21)	2026-10-24	AC




TOP VIEW

Scale 1:20; looking down (along -Z)




FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

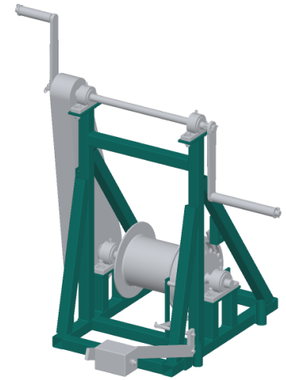

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two side frames 430 apart (bearing planes at -200 and +230 from the drum centre)
Each: base rail 660, post 150 behind the drum axis up to the top plate (805 to top)
Pad posts 60 either side of the axis; pad 180 x 50 x 8 on them, top at 177
Two M14 bolts pushed up through each pad before welding; heads inside the posts
Front brace from the rail front to the post at 640; rear brace to the post at 560
Front and rear cross rails; top tie at 700; brake anchor bar 125 behind the axis
Drawbar clevis: two 8 mm plates on the front rail, 21 mm hole 40 up, 32 apart
Pawl bracket under the +X front brace, reamed for the 12 mm pin; two brake anchor posts
Brake lever plate outside the +X rail, pivot 67 up; guard clip angles on the -X post
Four stake tubes 33.7 x 80, 200 either side of the drum axis, outside the rails
Tack on a flat table; diagonals within 3 mm; pads level and in line within 1 mm

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Capstan frame: making sketch

DRAWING NO.	REV	SHEET	SIZE
SKG-DWG-101	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

40 x 40 x 2 SHS; 8 mm plate; 33.7 x 3.2 tube; 12 mm bar

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand