
BUILD PLAN SKETCH, PLAN NOT YET BUILT


SinkGrab · github.com/BoujeeEnjinia1701/sinkgrab

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	SKG-DDR-004: stop collar replaced by a cross hole for the sleeve pin	2026-10-04	AC
P3	Kit 1.9.1: detailed model; arm pivots at 60 mm (SKG-DEC-001 K6)	2026-10-24	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

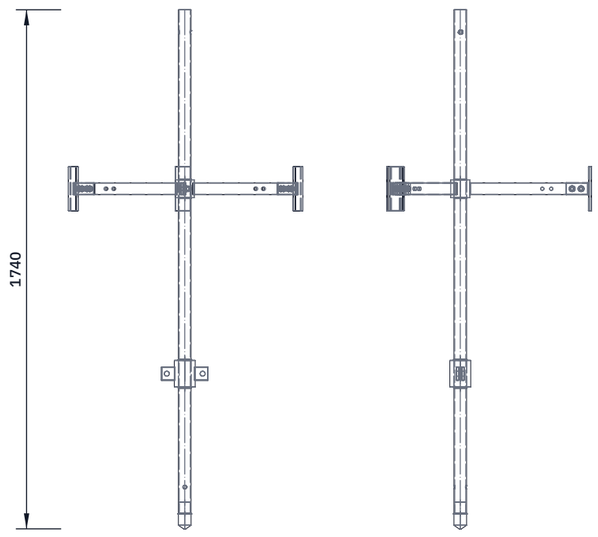

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bottom pole 42.4 x 2.6, 1,420 long, solid 50 mm spike end; no stop collar
12.5 cross hole 140 above the tip, square to the arm lugs, for the sleeve pin
Hub 70 OD x 90 at 80 above the toe line; two pairs of lugs, 16.5 holes at 60
Centralizer collar at 700 up; three arms 120 deg apart; skids at 440 radius
Skid arms drilled for 340, 440 and 590 radius (0.8, 1.0 and 1.3 m rings)
Top end takes the next section's spigot, 13 mm cross hole
Check: pole straight within 3 mm; skids on a 880 circle

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Scraper head (pole, hub and centralizer): making sketch

DRAWING NO.	REV	SHEET	SIZE
SKG-DWG-112	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

42.4 x 2.6 tube; 70 mm tube hub; 8 mm plate lugs; 40 x 8 flat; 10 mm skids

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand