


| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |

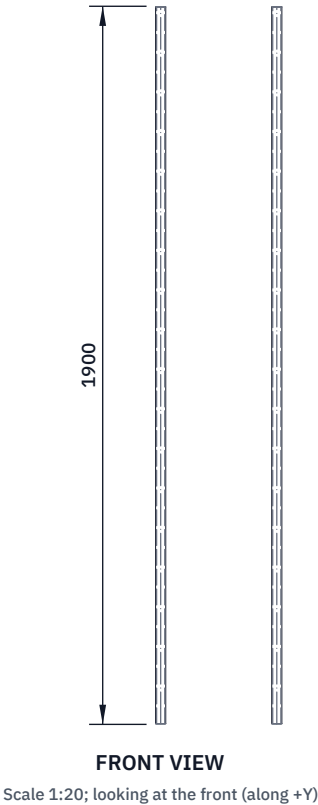

**WHERE IT GOES**  
This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

- Cut 1,900 mm of 26.9 x 2.6 mm galvanized tube.
- Cut the lower end at 45 degrees so it drives more easily; file the top end square and deburr.
- Paint a ground mark 500 mm from the lower tip.
- Touch up cut ends with zinc-rich paint.
- Push a 27 mm plastic tube cap onto the top end.
- Fit: driven upright 500 mm into the ground with a post driver, about 5 m from the mast on the side away from the horn.
- The switch back plate clamps to it with two hose clips, the switch box centre 1,300 mm above ground.
- Check: upright within 2 degrees; does not move when pushed by hand.

**SlopeWatch keyed switch post: making sketch**

|                                                                         |                    |                                                                                                     |                                             |                        |                              |
|-------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------|------------------------|------------------------------|
| DRAWING NO.<br><b>SLW-DWG-114</b>                                       |                    |                                                                                                     | REV<br><b>P1</b>                            | SHEET<br><b>1 of 1</b> | SIZE<br><b>ANSI B</b>        |
| SCALE<br><b>1:20</b>                                                    | UNITS<br><b>mm</b> | PROJECTION<br> | DATE<br><b>2026-10-01</b>                   |                        | DRAWN<br><b>Amish Chadha</b> |
| MATERIAL / NOTES<br><b>Galvanized steel tube 26.9 x 2.6 mm (3/4 in)</b> |                    |                                                                                                     |                                             |                        |                              |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com      |                    |                                                                                                     | Generated from cad/src; do not edit by hand |                        |                              |