



CONCEPT, NOT FOR FABRICATION

SnapFrame · github.com/BoujeeEnjinia1701/snapframe

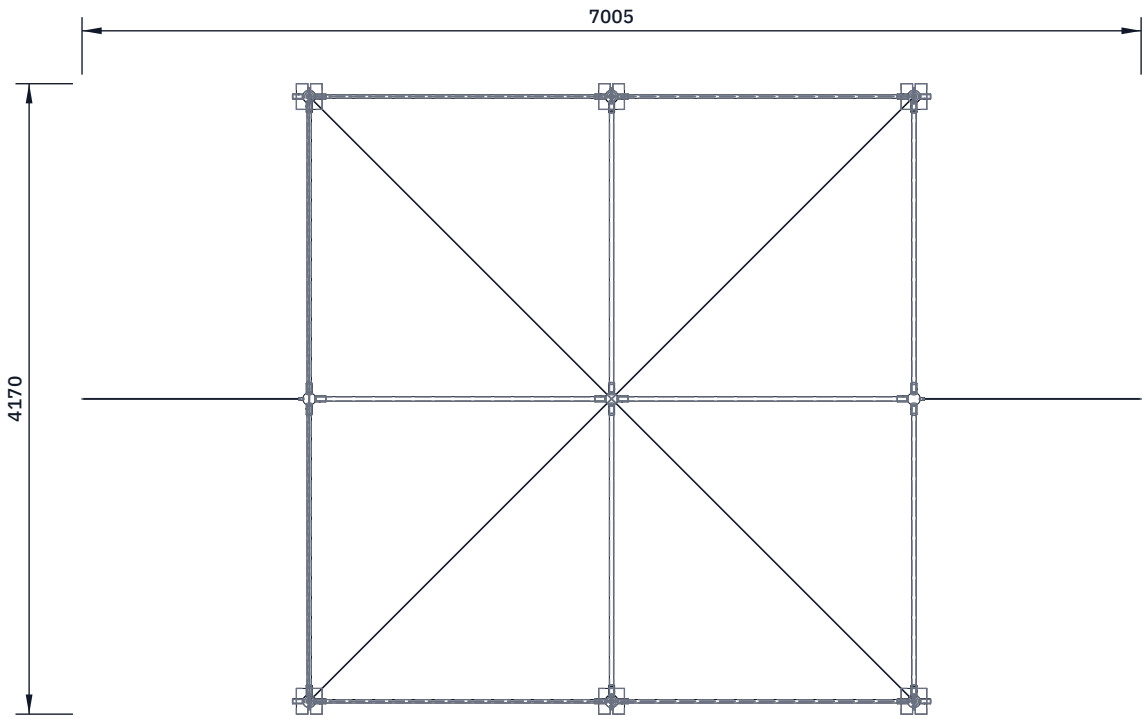


TOP VIEW

Scale 1:50; looking down (along -Z)

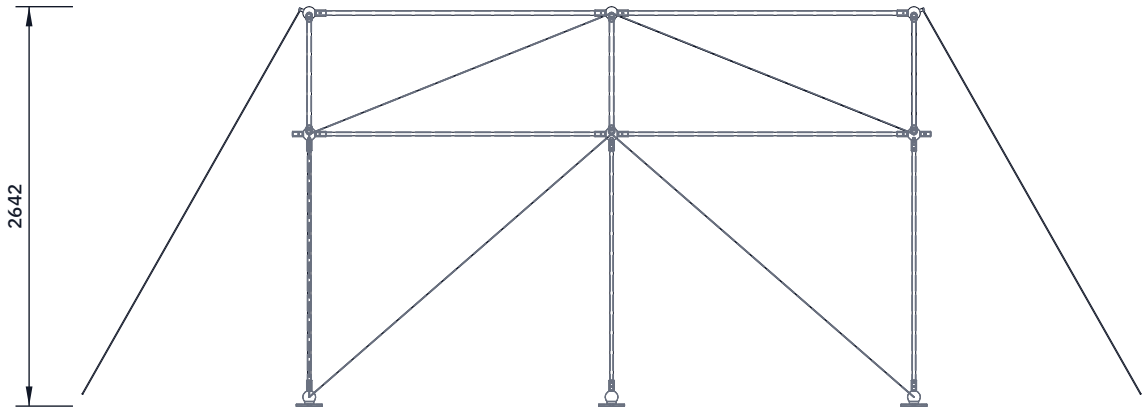

FRONT VIEW


Scale 1:50; looking at the front (along +Y)

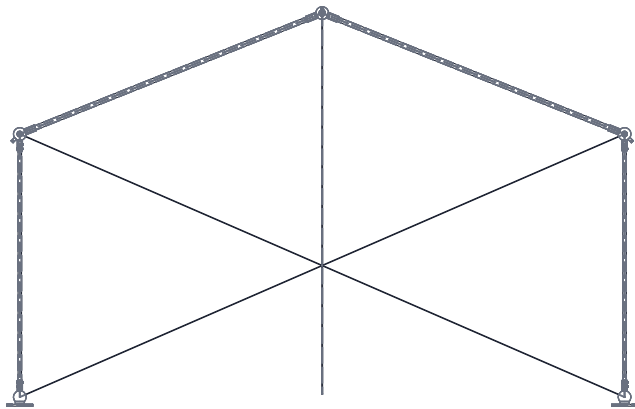

RIGHT VIEW


Scale 1:50; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary general arrangement (TRL 3)	2026-09-25	AC
P2	1 in ridge tubes; one eave node variant (DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC

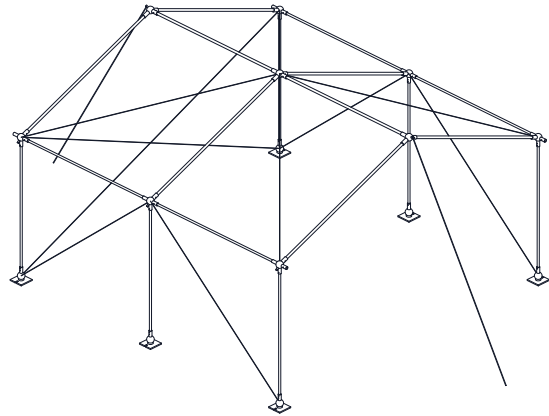


ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

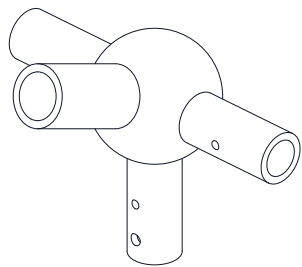


EAVE NODE, ALL SIX (6)

Detail, not to scale

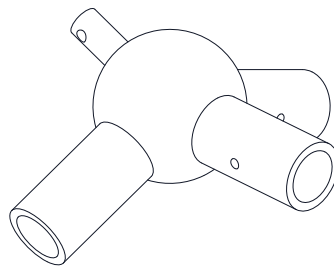

RIDGE NODE, END (7)

Detail, not to scale

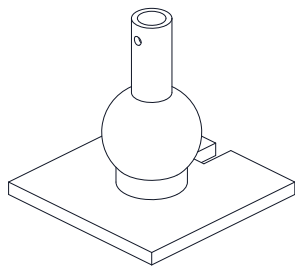

FOOT NODE (5)

Detail, not to scale

KEY DIMENSIONS AND DATA (SIZE M)

Floor 4.0 x 4.0 m, bays 2 x 2.0 m; eave 1.8 m, ridge 2.6 m (node centers)
Cut lengths: post 1650, rafter 2064, ridge and eave 1910 mm
Tubes: 1 in EMT rafters and ridge (OD 29.5 mm); 3/4 in EMT posts and eaves (OD 23.4 mm)
Sockets: 65 mm engagement, bore = tube OD + 0.6 mm, wall 5 mm; core 84 mm
Button hole 6 mm at 25 mm from tube end; pin hole 8 mm at 50 mm (feet, eave posts)
Foot plate 170 x 170 x 12 mm, anchor slot 18 mm, anchor 62 mm outboard
Guy anchors 1.5 m beyond each gable; 10 brace cables, 4 mm
Wind rating 19.7 m/s at SF 1.5 (post governs); not rated for snow
Corner eave nodes: socket past the gable left blank and capped
PRELIMINARY, NOT FOR FABRICATION. Anchors omitted from views; guy lines shown

SNAPFRAME

github.com/BoujeeEnjinia1701/snapframe

General arrangement, size M

DRAWING NO. SNF-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES EMT to ANSI C80.3; printed polymer nodes (not chosen); see bom/bom.csv and SNF-CAL-001					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand