



CONCEPT, NOT FOR FABRICATION

PRELIMINARY, NOT FOR FABRICATION. Anchors omitted from views; guy lines shown.

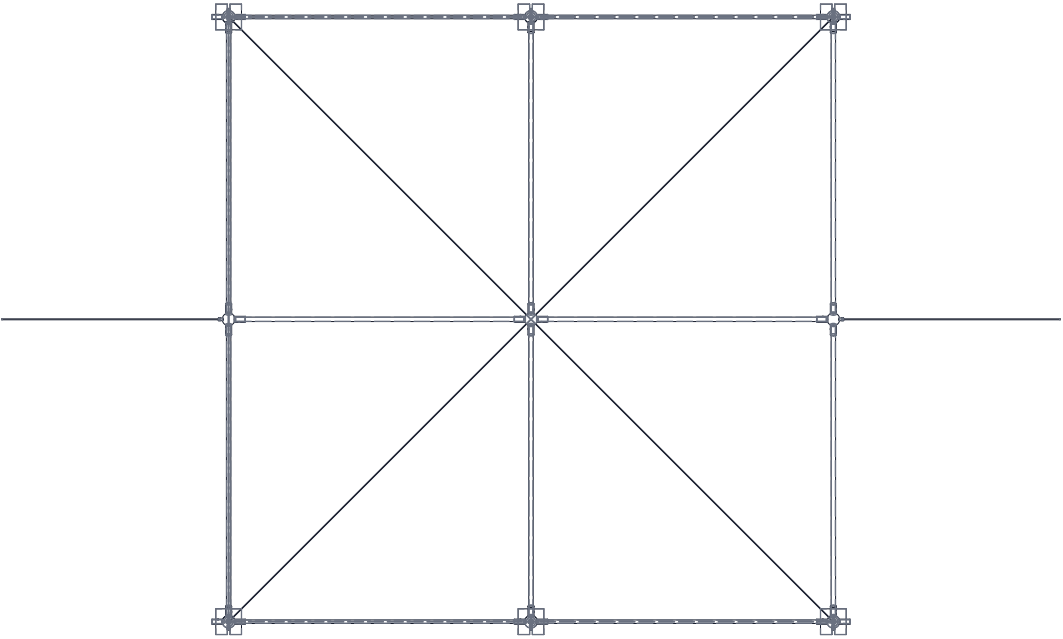


TOP VIEW

Scale 1:50

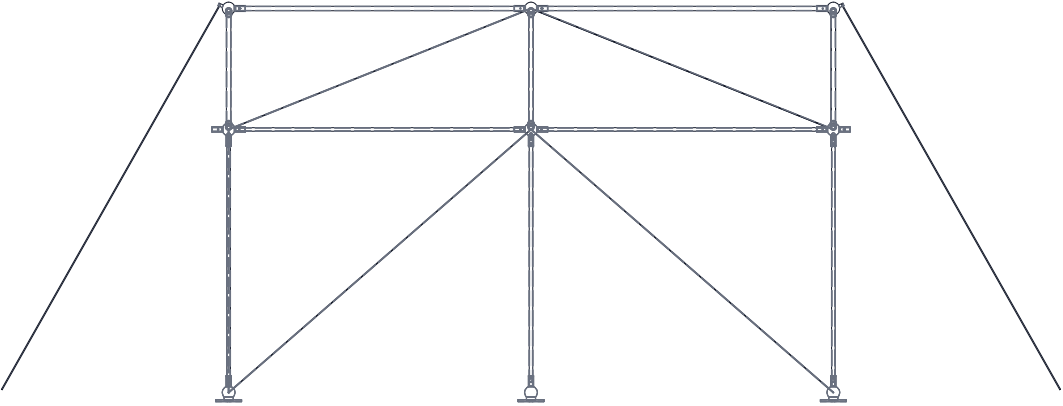

FRONT VIEW


Scale 1:50

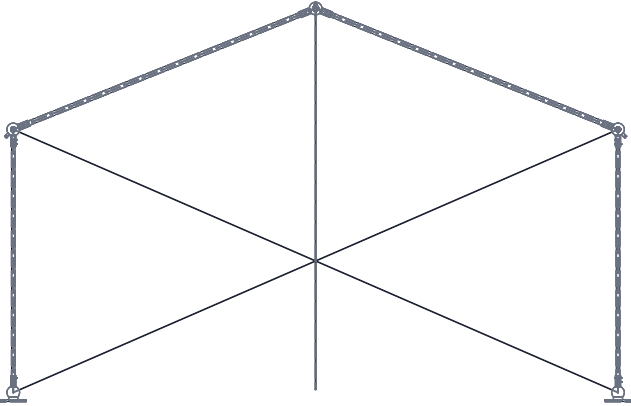

RIGHT VIEW


Scale 1:50

REV	DESCRIPTION	DATE	BY
P1	Preliminary general arrangement (TRL 3)	2026-09-25	AC
P2	1 in ridge tubes; one eave node variant (DDR-002)	2026-09-25	AC

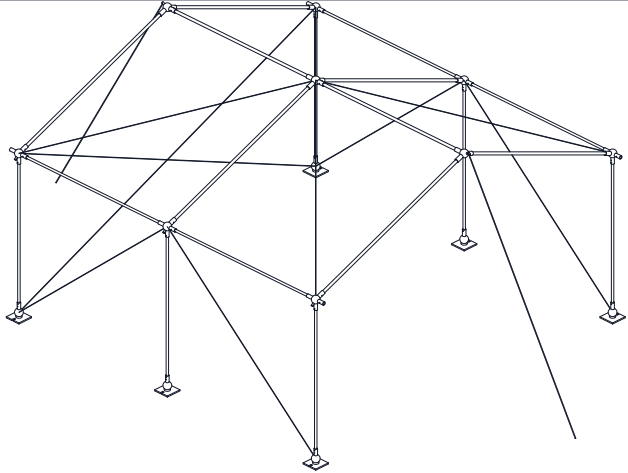


ISOMETRIC VIEW

Not to scale

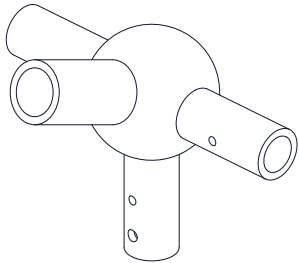


EAVE NODE, ALL SIX (6)

Detail, not to scale

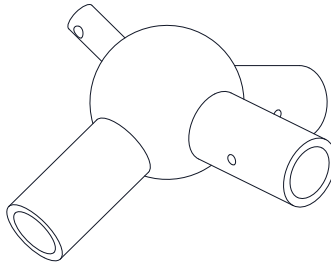

RIDGE NODE, END (7)

Detail, not to scale

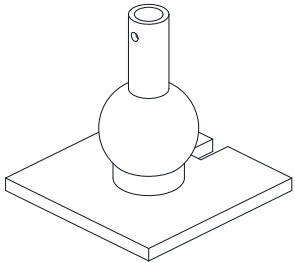

FOOT NODE (5)

Detail, not to scale

KEY DIMENSIONS AND DATA (SIZE M)

Floor 4.0 x 4.0 m, bays 2 x 2.0 m; eave 1.8 m, ridge 2.6 m (node centers)
Cut lengths: post 1650, rafter 2064, ridge and eave 1910 mm
Tubes: 1 in EMT rafters and ridge (OD 29.5 mm); 3/4 in EMT posts and eaves (OD 23.4 mm)
Sockets: 65 mm engagement, bore = tube OD + 0.6 mm, wall 5 mm; core 84 mm
Button hole 6 mm at 25 mm from tube end; pin hole 8 mm at 50 mm (feet, eave posts)
Foot plate 170 x 170 x 12 mm, anchor slot 18 mm, anchor 62 mm outboard
Guy anchors 1.5 m beyond each gable; 10 brace cables, 4 mm
Wind rating 19.7 m/s at SF 1.5 (post governs); not rated for snow
Corner eave nodes: socket past the gable left blank and capped

SNAPFRAME

General arrangement, size M

DRAWING NO. SNF - DWG - 001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES EMT to ANSI C80.3; printed polymer nodes (not chosen); see bom/bom.csv and SNF-CAL-001					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		