
BUILD PLAN SKETCH, PLAN NOT YET BUILT


SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	10 turns (was 11) so the evaporator bank fits within 8 L of water	2026-10-02	AC

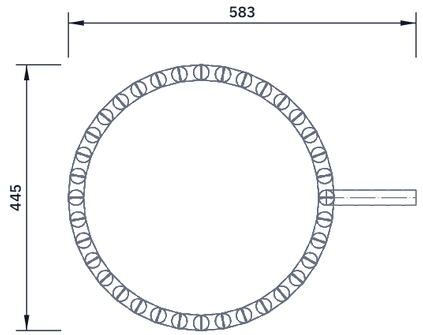


TOP VIEW

Scale 1:10; looking down (along -Z)

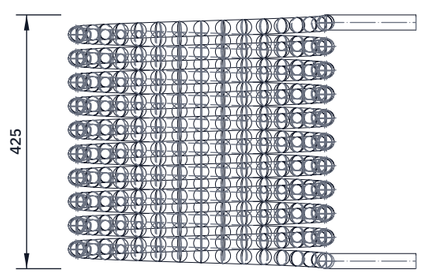


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

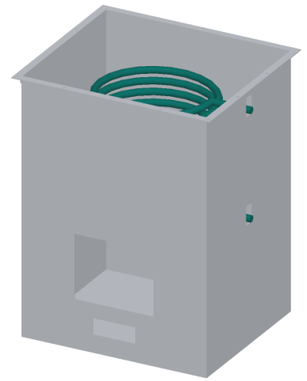

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

About 13.5 m of 25.4 x 1.65 stainless tube in one length, no joints inside the firebox.

Wind 10 turns on a 395 mm drum (mean diameter 420), 40 mm a turn, so the tubes stand 14.6 apart. Use a turned wooden or steel former and wind slowly by hand; anneal nothing.

Leave both ends on the right side, at the same point of the turn: bend each out square to the coil, 150 long, so each tail ends 10 outside the shell. The lower tail is the inlet, the upper the outlet.

Overall: 445 across, 425 tall; tails 1016 and 1416 above the ground when the coil sits on its brackets.

Pressure test with water before fitting (see the safety stops).

Check: round within 5; no kinks or flats; both tails level.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot monotube coil: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-108	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Stainless steel 316 tube 25.4 OD x 1.65 wall

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand