BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Sits on the evaporator bank box, not the roof	2026-10-02	AC
P3	Inlet hole 145 in front; baffle ledges (sketch 128) (STR-DEC-001 S1)	2026-10-24	AC

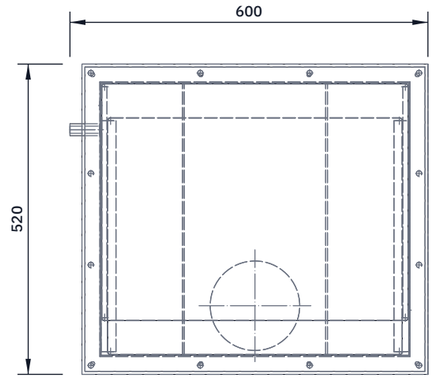

TOP VIEW

Scale 1:10; looking down (along -Z)

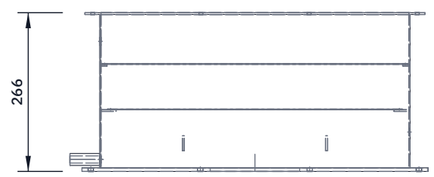

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

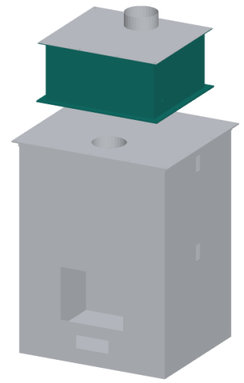

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base: 6 mm plate 580 x 520, 150 gas inlet hole 145 in front of the centre line; twelve 9 mm stud holes, 15 in from the edge.

Walls: 2 mm sheet, 520 x 460 outside, 260 tall, welded to the base.

Top flange: 25 mm wide, 3 mm, round the top outside, with eight 7 mm holes for the lid bolts.

Two 25 x 3 support bars across the inside, 240 apart, tops 54 above the base; four baffle ledges on the end walls (sketch 128).

Bulkhead union holes, 13 mm: left end 190 behind the centre line, 212 above the base; right end 152 in front, 60 above the base.

Drain: 12 mm hole in the left end, 14 above the base, and a 20 mm stub with a valve. Flue water is acid: stainless valve.

The outlet union feeds the evaporator bank, not the coil.

Check: the base sits flat on the bank box; the lid seats all round.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot economizer box: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-111	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 2 mm; plate 6 mm; flat bar 25 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand