



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Sits on the evaporator bank box, not the roof	2026-10-02	AC

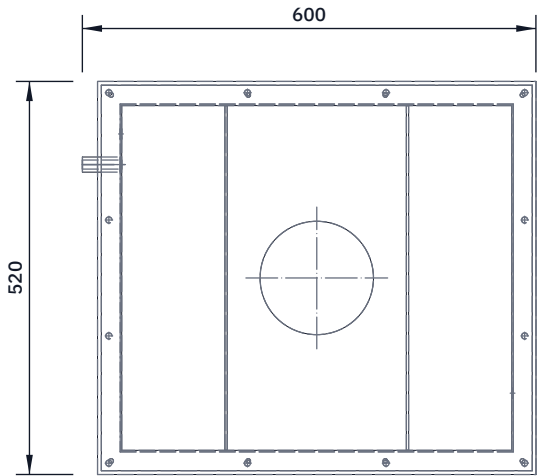


TOP VIEW
Scale 1:10; looking down (along -Z)

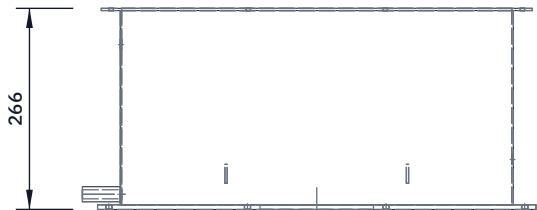

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

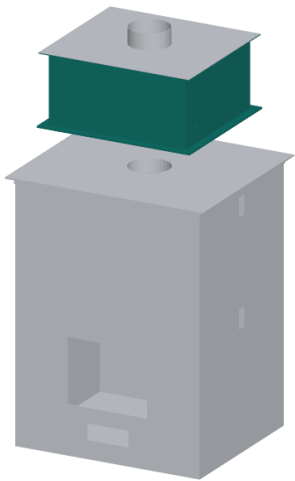

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base: 6 mm plate 580 x 520 with a 150 hole in the centre and twelve 9 mm holes for the studs on the bank box top, 15 in from the edge.

Walls: 2 mm sheet, 520 x 460 outside, 260 tall, welded to the base.

Top flange: 25 mm wide, 3 mm, round the top outside, with eight 7 mm holes for the lid bolts.

Two 25 x 3 support bars across the inside, 240 apart, tops 54 above the base: the tube bank rests on them.

Bulkhead union holes, 13 mm: left end 190 behind the centre line, 212 above the base; right end 152 in front, 60 above the base.

Drain: 12 mm hole in the left end, 14 above the base, and a 20 mm stub with a valve. Flue water is acid: stainless valve.

The outlet union feeds the evaporator bank, not the coil.

Check: the base sits flat on the bank box; the lid seats all round.

STEAMROOT				github.com/BoujeeEnjinia1701/steamroot			
SteamRoot economizer box: making sketch							
DRAWING NO. STR-DWG-111			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Mild steel sheet 2 mm; plate 6 mm; flat bar 25 x 3 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	