



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW
Scale 1:5; looking down (along -Z)

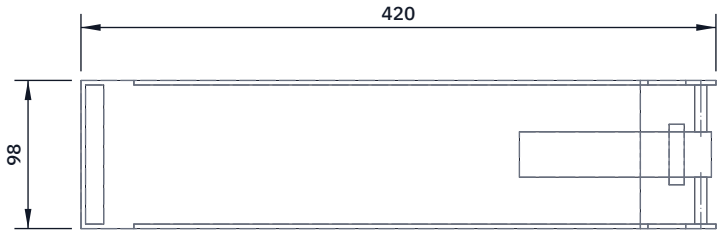

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Channel: one 3 mm blank 370 mm long, folded to a 98 mm wide base with 60 mm walls (inside 92 mm: 1 mm clearance each side of the pack).

Leave the walls 40 mm taller for the last 45 mm at the upper end (the ears that carry the lever pin).

End stop: 12 mm plate 92 x 70 mm welded across the lower end, 15 mm in; the pack's receptacle mounts on it on its floating mount.

Lever: 30 x 8 mm bar 127 mm long on an 8 mm pin through the ears, with a pad block 40 x 10 x 58 mm that presses the pack's handle end.

Set the over-centre point so it closes with 50 N or less at the end and gives 330 N or more on the pack, with a detent.

Two 6.5 mm holes in the base, 240 mm apart, to the down tube tabs.

Fit: base on the tabs, M6 bolts; the pack slides down onto the receptacle and the lever closes over its top.

Check: SwapCell interface v0.3 envelope gauge slides in freely.

STEPGEN				github.com/BoujeeEnjinia1701/stepgen			
StepGen receiver cradle with lever: making sketch							
DRAWING NO. SGN-DWG-110			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Steel sheet 3 mm, plate 12 mm, flat bar 30 x 8 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	