BUILD PLAN SKETCH, PLAN NOT YET BUILT

StumpRider · github.com/BoujeeEnjinia1701/stumprider

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

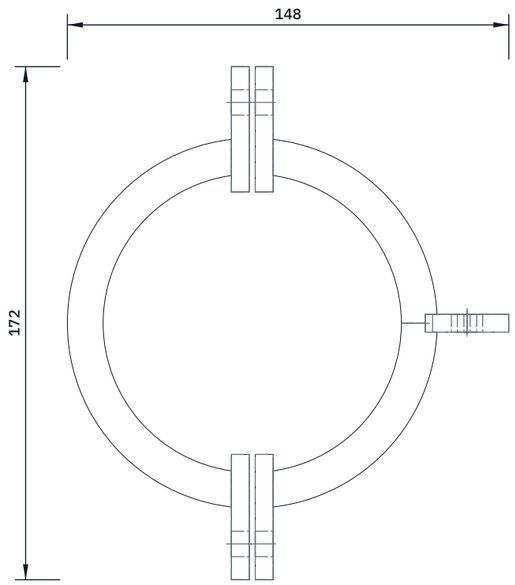

TOP VIEW

Scale 1:2; looking down (along -Z)

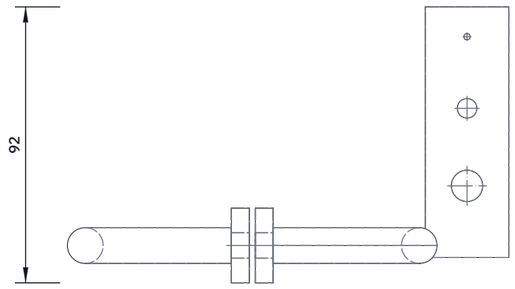

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

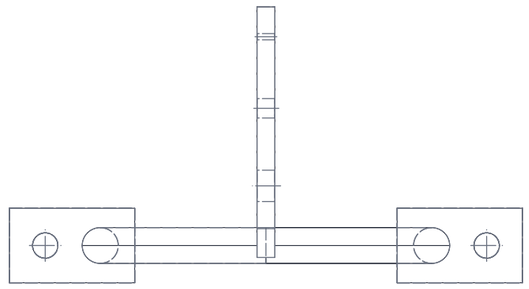

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

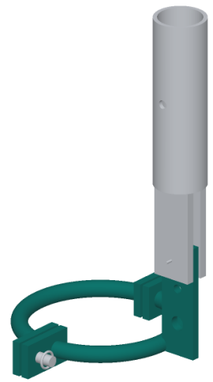

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bend 12 bar round a 100 mm former into a full ring,
112 mean diameter; saw across it to make two halves
with a 2 mm gap at each joint.
Ears: four 6 x 25 x 42 flat bar, 8.5 hole 18 out from
the bar centre; weld one to each end, holes in line.
Tang: 6 x 28 x 84 flat bar, welded on the outside of the
fixed half midway between the joints, 4 below its top.
Tang holes 10.5, 6.5 and 2.1 at 20, 46 and 70 up,
14 from the inner edge. Galvanise after welding.
Check: halves meet with 2 mm gaps, both holes line up.

STUMPRIDER

github.com/BoujeeEnjinia1701/stumprider

Rider ring, two halves with ears and tang

DRAWING NO.	REV	SHEET	SIZE
SMR-DWG-101	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

12 mm mild steel round bar; 6 mm flat bar

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand