



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

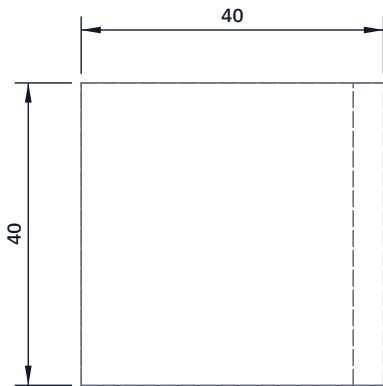


TOP VIEW

Scale 1:1; looking down (along -Z)

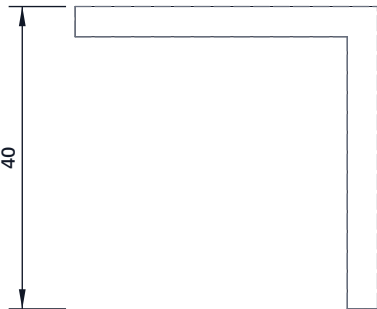


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

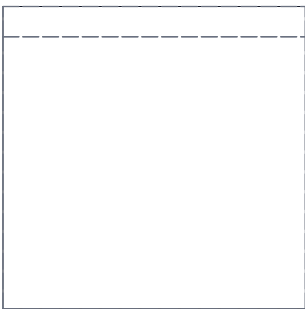

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

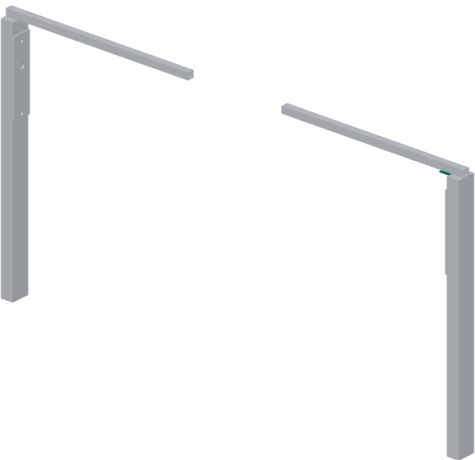

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 40 mm slices of 40 x 40 x 4 mm angle; deburr.

One 8.5 mm hole in the middle of each leg, 20 mm from the corner.

Fit: the upright leg flat on the inner face of the upright, its top level with the upright's top, M8 bolt through the upright; the flat leg under the holder arm, M8 bolt up through both.

It sits 4 mm above the top of the axle plate.

Check: the flat leg is level with the upright's top end.

SUNCLAVE		github.com/BoujeeEnjinia1701/sunclave	
SunClave arm bracket (make 2): making sketch			
DRAWING NO. SCL-DWG-116		REV P1	SHEET 1 of 1
		SIZE ANSI B	
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01
		DRAWN Amish Chadha	
MATERIAL / NOTES Steel equal angle 40 x 40 x 4 mm			
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com		Generated from cad/src; do not edit by hand	