


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

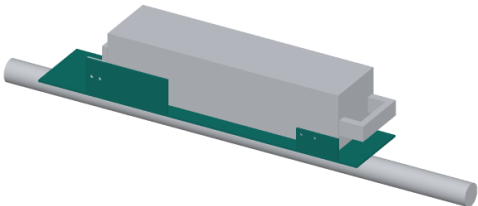

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank, cut and folded: a base 470 x 98 mm with two guide tabs 120 x 50 mm on each long edge at the bottom bracket end, and one latch ear tab 62 x 31 mm on the left edge at the head tube end.

Fold the three tabs up 90 degrees on the base's edges, inside radius about 4.5 mm (1.5 x thickness). Inside faces 92 mm apart.


Band slots: three pairs, 3 x 13 mm, 19 to 22 mm each side of the centre line, at 100 mm below, at, and 100 mm above the middle.

Air windows 68 x 44 mm either side of the middle slots.

Every other hole is on the layout picture: drill, countersink where it says, deburr. Base, guides and ear have no welds.

Fit: sits on the three V-saddles; the band clamps pass through the slots and over the base between them.

Check: the SwapCell envelope gauge drops between the guides with 1 mm each side; the base lies flat within 1 mm over its length.

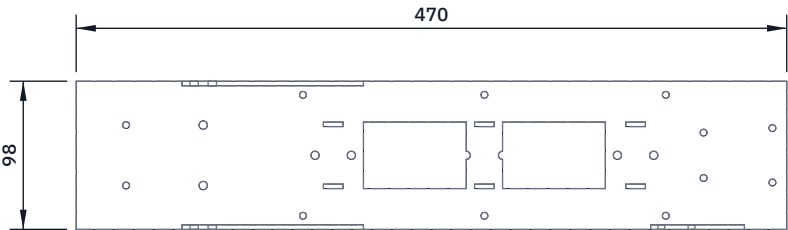

TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

SUNSPOKE

github.com/BoujeeEnjinia1701/sunspoke

SunSpoke cradle tray: making sketch

DRAWING NO. SSP-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052-H32					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand