



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

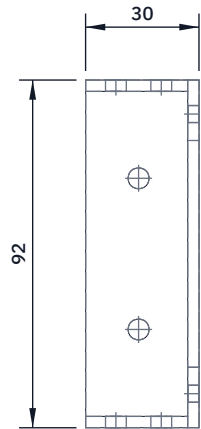


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)

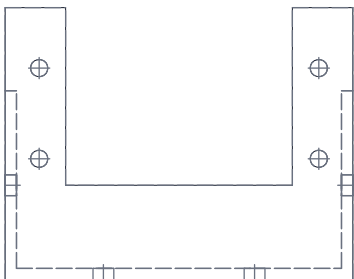

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

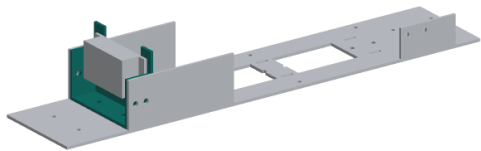

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank folded into a wall with a foot and two side flanges.

Wall 92 mm wide x 72 mm tall; foot 27 mm deep; side flanges

27 mm deep, 50 mm tall. Relieve the corners with 3 mm holes.

Plug notch in the wall, open at the top: 60 mm wide, down to 25 mm above the tray. The pack's plug passes through it.

Holes: foot two 5.5 mm, 13 mm from the wall, 20 mm each side;

each flange two 5.5 mm, 7 and 19 mm from the wall, 25 mm up;

wall four 4.5 mm for the receptacle, 37 mm each side, 32 and

56 mm up from the tray.

Fold the foot and flanges away from the pack side, 90 degrees.

Fit: foot bolted to the tray, flanges bolted inside the guides,

M5 bolts with nyloc nuts; the pack's end bears on the wall.

Check: the wall is square to the tray within 1 degree.

SUNSPOKE

github.com/BoujeeEnjinia1701/sunspoke

SunSpoke end stop: making sketch

DRAWING NO.

SSP-DWG-105

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium sheet 3 mm, 5052-H32