



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Prototype material: 3 mm UL 94 V-0 polycarbonate sheet	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

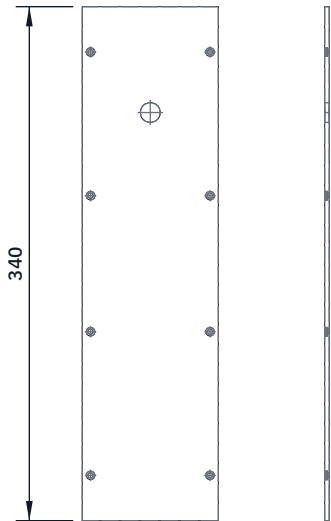

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Cut 90 x 340 from 3 mm UL 94 V-0 polycarbonate sheet.
- Eight 3.4 holes countersunk on the outside, 39.5 each side of centre, 30, 125, 215 and 310 up from the connector end.
- Wake button hole 13 dia, centred across, 270 up.
- Fit: on a 1 mm flat gasket over the tray flanges, eight M3 countersunk screws into the press-in nuts; heads flush.
- Tighten in a cross pattern from the middle out.
- Check: the gasket squeezes evenly with no gap at the corners.

SwapCell pack lid: making sketch

DRAWING NO. SWC-DWG-108			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Polycarbonate sheet 3 mm, UL 94 V-0 grade					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand