



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

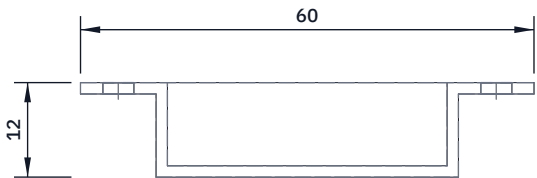


TOP VIEW

Scale 1:1; looking down (along -Z)

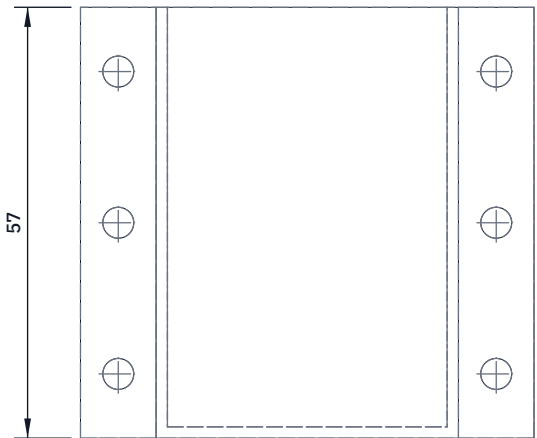


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

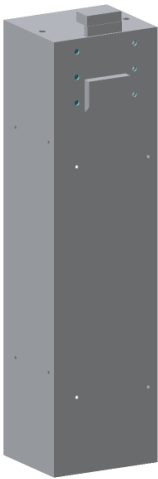

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

An open box 40 wide, 12.5 deep, 57 tall, open on the back (the side against the tray wall) and at the top (the tray top closes it).

Fold from one blank: front, two sides and a bottom, with a 10 mm flange on the back edge of each side, folded outward.

Drill three 4.1 holes in each flange, 5 from the side wall, 8.5, 28.5 and 48.5 up from the bottom.

Fit: flanges flat on the inside of the back wall, bottom 281.5 up from the connector face, centred across. Six countersunk blind rivets from outside. It is the latch doubler: the pawl's lifting load goes into its bottom, then through the rivets.

Check: the pawl slides in and out freely with 0.5 mm each side.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell latch housing: making sketch

DRAWING NO. SWC-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel sheet 1.5 mm, zinc plated					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand