



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

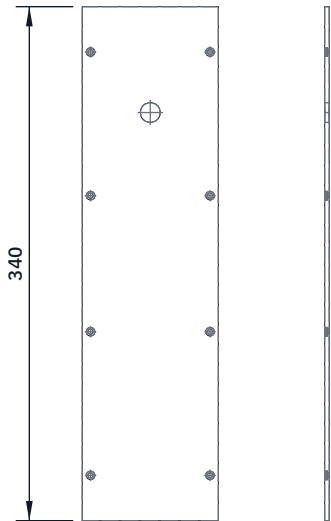

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A flat plate 90 x 340 x 3 (printed, or cut from V-0 sheet).
Eight 3.4 holes countersunk on the outside, 39.5 each side of centre, 30, 125, 215 and 310 up from the connector end.
Wake button hole 13 dia, centred across, 270 up.
Fit: on a 1 mm flat gasket over the tray flanges, eight M3 countersunk screws into the press-in nuts; heads flush.
Tighten in a cross pattern from the middle out.
Check: the gasket squeezes evenly with no gap at the corners.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell pack lid: making sketch

DRAWING NO. SWC-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Flame-retardant polymer 3 mm, UL 94 V-0 grade					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand