


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

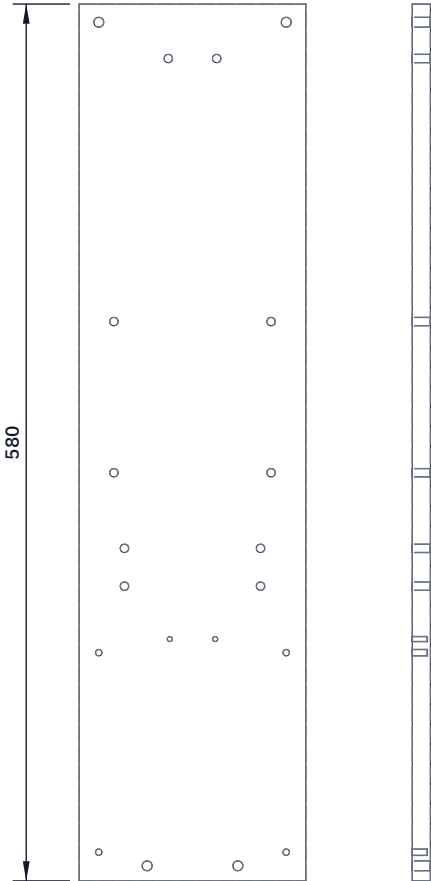

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 150 x 580 from 12 mm plate; square, deburr, round corners 3.

Heights from the bottom edge, sideways from the centre line.

Countersunk from the back (the wall side), 5.5 dia:

shelf 45 each side at 195 and 220; guides 52 each side at

270 and 370; catch 16 each side at 544.

Tapped from the front: M5 strap holes 62 each side at 19 and

151; M4 controller holes 15 each side at 160.

Wall holes 6.5: 30 each side at 10, 62 each side at 568.

Fit: everything else on the dock hangs on its front face; its

back goes flat on a non-combustible wall.

Check: screw heads sit flush or below the back face.

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

SwapCell dock back plate: making sketch

DRAWING NO. SWC-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 12 mm, 6082 or 6061					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	