


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

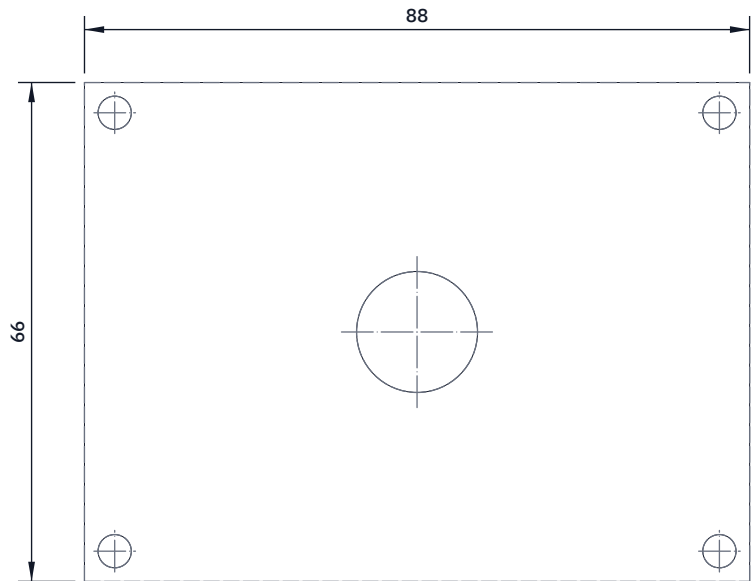


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

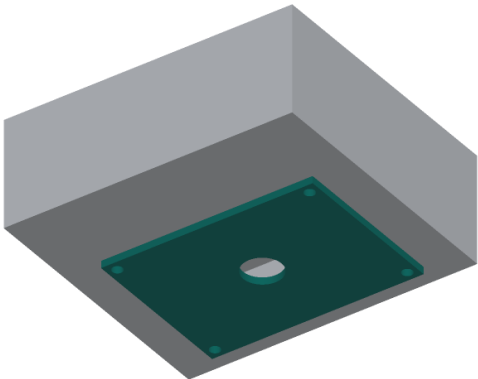

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 88 x 66 from 3 mm sheet; deburr.

Four 4.4 holes, 40 each side of centre, 4 and 62 from the front edge; a 16 mm hole for the receptacle wires, centred across, 33 from the front edge.

Fit: flat under the shelf, holding the 15 mm foam pad and the receptacle in the cavity; four M3 screws into the inserts.

Check: the receptacle flange touches the ledge with the foam lightly squeezed.

SwapCell receptacle retainer plate: making sketch

DRAWING NO. SWC-DWG-114			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand