



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

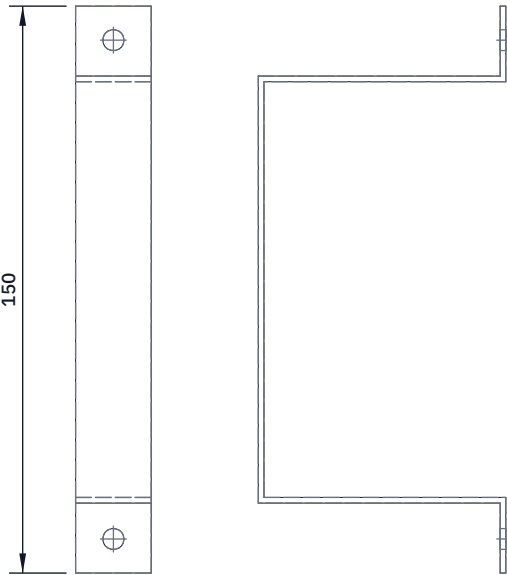

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 20 wide strip 300 long. Fold to a hat shape that fits the charger: two feet 20 long, two legs 64, a front 113.
Measure your charger first: legs = its depth, front = its height plus 3.
Drill a 5.5 hole in each foot, 11 from the fold.
Fit: the charger's back flat on the plate; each strap over it, 62 each side of centre, feet flat on the plate, one M5 screw into each tapped hole.
Check: the charger does not move when pulled by hand.

SWAPCELL				github.com/BoujeeEnjinia1701/swapcell			
SwapCell charger strap (make 2): making sketch							
DRAWING NO. SWC-DWG-115			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium strip 20 x 1.5 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	