BUILD PLAN SKETCH, PLAN NOT YET BUILT

TrunkBelay · github.com/BoujeeEnjinia1701/trunkbelay

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

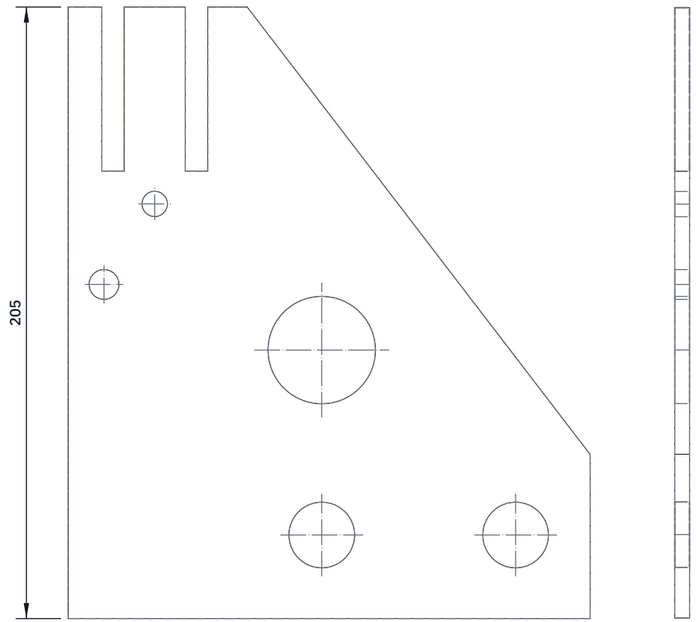

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

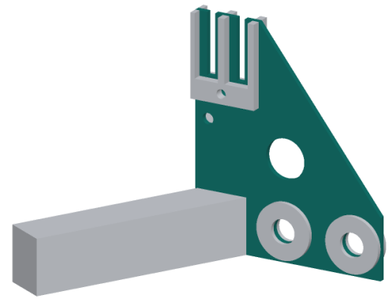

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One piece of 5 mm 6082-T6 aluminium plate, profile cut.
Outline from the front edge (the edge toward the trunk):
175 long at the bottom, 205 high at the front; 55 high at
the back end; the top runs 60 back, then slopes down.
Holes: load eye 22 at 150 back, 28 up; spare eye 22 at 85
back, 28 up; lightening hole 36 at 85 back, 90 up;
tether hole 10 at 12 back, 112 up (for the fixed end's link).
Chain slots: two, 7.5 wide, 55 deep from the top edge, centred 15 and 43 back from the front edge. Cut them square and file every edge smooth; no burr may touch chain.
Lock pin hole 8.5 at 29 back, 139 up (drill after the cheeks
are welded on, through all three plates).
Do not thicken the plate: a link must span it (6 mm at most).
Round the eye edges to 2 mm radius after the rings go on.

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

TrunkBelay: spine plate (make 1)

DRAWING NO.	REV	SHEET	SIZE
TKB-DWG-101	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

6082-T6 aluminium plate 5 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand