


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

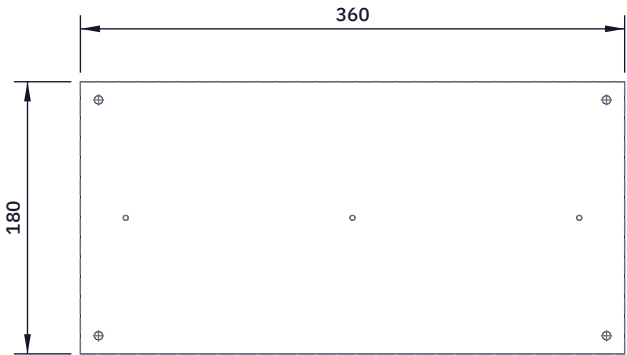

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

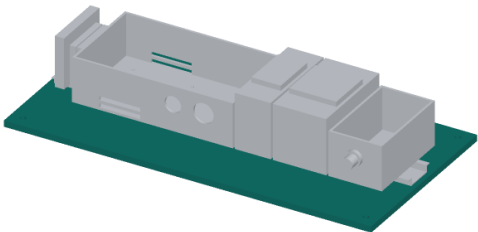

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 360 x 180 x 6 mm. Cut square, file the edges, round the corners to about 3 mm. Scribe a centre line along the long side.

Rail holes: three on the centre line, at the middle and 150 mm each side of it. Drill 3.3 mm right through and tap M4.

Corner holes: four 5.5 mm holes, 12 mm in from each long and short edge, for screwing the plate to a wall or cabinet later.

Deburr every hole on both faces.

Underneath: four stick-on rubber feet, 20 mm across, centred 150 mm each side of the middle and 60 mm each side of the centre line.

Fit: the rail lies on the centre line, held by three M4 x 6 mm pan-head screws through its base into the tapped holes.

Check: an M4 screw runs into each hole by hand; the plate rocks on none of its feet on a flat bench.

TWINKIT			github.com/BoujeeEnjinia1701/twinkit		
Twinkit bench plate: making sketch					
DRAWING NO. TWK-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 6 mm, 5083, 6082 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					