


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

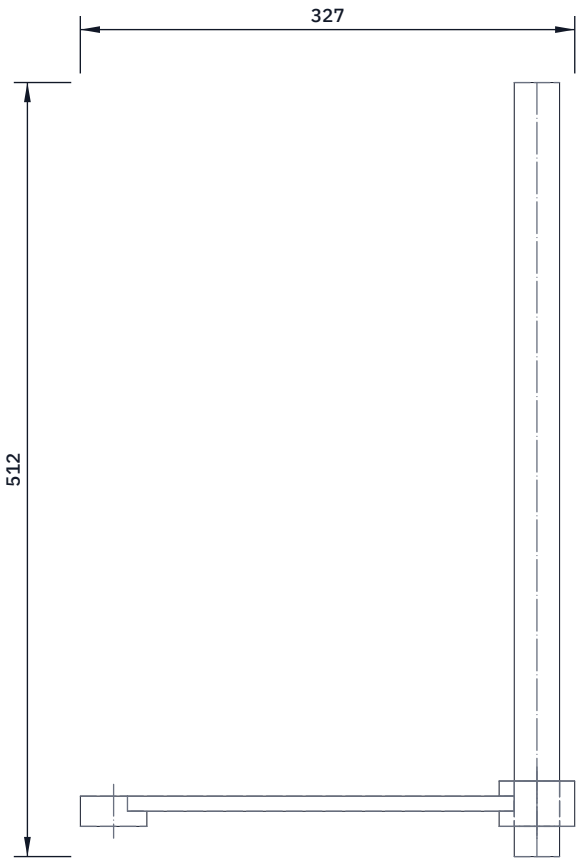


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

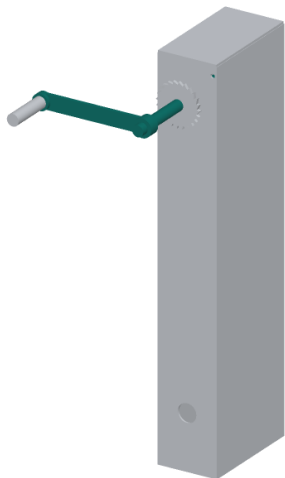

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Crank shaft: saw 30 bar 512 long; chamfer the ends.
Crank arm: 40 x 10 flat bar, holes 280 apart: 30 for the shaft, 12 for the grip pin. Weld a 50 x 30 boss (bored 30) on the shaft hole.
Weld the 12 grip pin (120 long) into the outer hole, square.
Fit the crank on the shaft end with its face 20 in from the end; drill 6 through boss and shaft together; roll pin.
Ratchet goes on the same shaft 150 from the crank (sheet 105).
Fits: the shaft turns in the two 30 bushes, 1000 above the rim.
Check: crank arm square to the shaft; grip turns on its pin.

VATREEL

github.com/BoujeeEnjinia1701/vatreel

VatReel: crank shaft and crank (make 1)

DRAWING NO. VTR-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 316 bar 30; 304 flat bar 40 x 10; 304 round 50 for the boss					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	