BUILD PLAN SKETCH, PLAN NOT YET BUILT

VoidScope · github.com/BoujeeEnjinia1701/voidscope

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC



TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

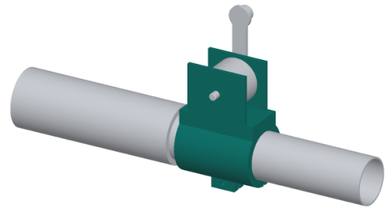

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print in one piece in PA12 from the model: a collar that clamps section 4 (38.1 mm bore, 50 mm outside, 64 long), a pad on top and two cheeks 3 mm thick, 28 mm apart.
Split along the bottom, 2 mm wide; two lugs with a 4.2 mm hole for the M4 clamp screw and nyloc nut.
Two 3.2 mm holes down through the pad, 10.5 mm either side of centre and 36 mm apart along the rod: the housings stop 2 mm under the top; 1.2 mm holes on up for the wires.
Shaft holes 6.2 mm through both cheeks, 50 mm above the rod's centre line; mark the centre detent on one cheek.
Fit 8 mm ahead of the grip, holes over the rod's holes.
Check: clamps firmly; drum turns freely between cheeks.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope steering control body: making sketch

DRAWING NO.	REV	SHEET	SIZE
VDS-DWG-113	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

PA12 nylon, laser sintered (SLS)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand