



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

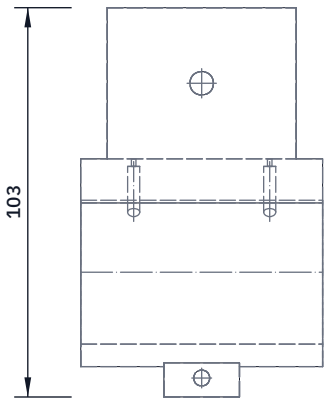


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

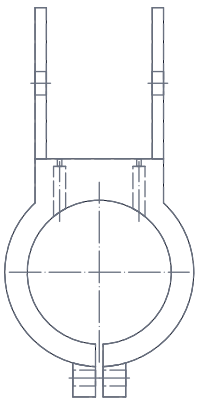

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

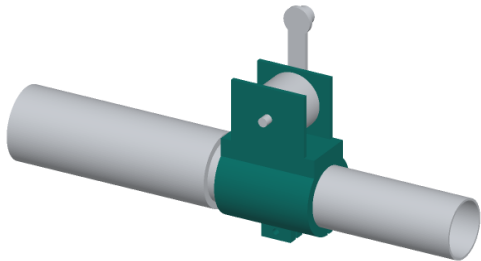

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print in one piece in PA12 from the model: a collar that clamps section 4 (38.1 mm bore, 50 mm outside, 64 long), a pad on top and two cheeks 3 mm thick, 28 mm apart. Split along the bottom, 2 mm wide; two lugs with a 4.2 mm hole for the M4 clamp screw and nyloc nut. Two 3.2 mm holes down through the pad, 10.5 mm either side of centre and 36 mm apart along the rod: the housings stop 2 mm under the top; 1.2 mm holes on up for the wires. Shaft holes 6.2 mm through both cheeks, 50 mm above the rod's centre line; mark the centre detent on one cheek. Fit 8 mm ahead of the grip, holes over the rod's holes. Check: clamps firmly; drum turns freely between cheeks.

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

VoidScope steering control body: making sketch

DRAWING NO. VDS-DWG-113		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES PA12 nylon, laser sintered (SLS)				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	