


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

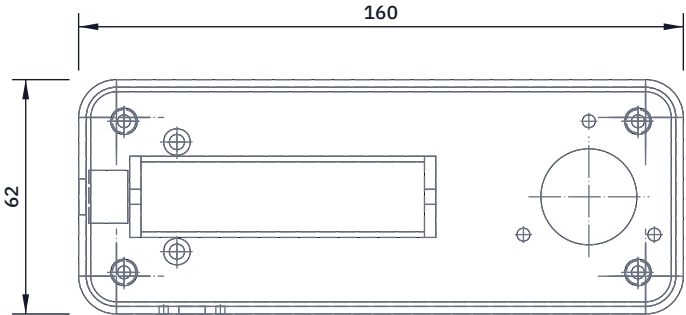


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

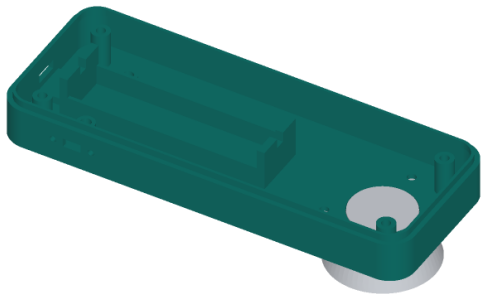

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print open side up, 0.2 mm layers, 5 perimeters (2.0 mm walls), 40 % infill.

Outside 160 x 62 x 16 mm, 10 mm corner radius; floor and walls 2.0 mm.

Tongue 1.2 x 2.6 mm stands up inside the rim; it locates the top shell.

Window hole 25.4 mm on the scan axis, 55 mm ahead of the centre.

Three 3.4 mm holes round it on a 40 mm circle for the shroud screws.

Four shell bosses 7 mm at 68 mm each side of centre, 20 mm out:

3.4 mm through, 6.2 mm counterbore 3.2 mm deep from below.

Cell cradle: two 1.5 mm rails and two 3 mm end walls 75 mm apart.

Two strap bosses beside the cradle take M3 inserts (4 mm hole).

Tail wall: USB-C opening 9.5 x 3.8 mm, 8 mm up; seat inside for the board.

Right wall: switch slot 7 x 3.5 mm and two 2.4 mm holes 15 mm apart.

Check: the top shell drops over the tongue without force.

WASTEWISE SCAN

github.com/BoujeeEnjinia1701/wastewise-scan

WasteWise Scan bottom shell: making sketch

DRAWING NO. WSC-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand