REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

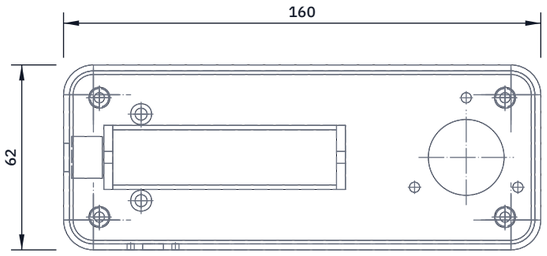

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

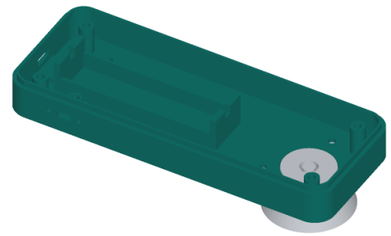

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print open side up, 0.2 mm layers, 5 perimeters (2.0 mm walls), 40 % infill.
Outside 160 x 62 x 16 mm, 10 mm corner radius; floor and walls 2.0 mm.
Tongue 1.2 x 2.6 mm stands up inside the rim; it locates the top shell.
Window hole 25.4 mm on the scan axis, 55 mm ahead of the centre.
Three 3.4 mm holes round it on a 40 mm circle for the shroud screws.
Four shell bosses 7 mm at 68 mm each side of centre, 20 mm out:
3.4 mm through, 6.2 mm counterbore 3.2 mm deep from below.
Cell cradle: two 1.5 mm rails and two 3 mm end walls 75 mm apart.
Two strap bosses beside the cradle take M3 inserts (4 mm hole).
Tail wall: USB-C opening 9.5 x 3.8 mm, 8 mm up; seat inside for the board.
Right wall: switch slot 7 x 3.5 mm and two 2.4 mm holes 15 mm apart.
Check: the top shell drops over the tongue without force.

WASTEWISE SCAN

github.com/BoujeeEnjinia1701/wastewise-scan

WasteWise Scan bottom shell: making sketch

DRAWING NO.	REV	SHEET	SIZE
WSC-DWG-101	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
PETG, 3D printed

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand