REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC

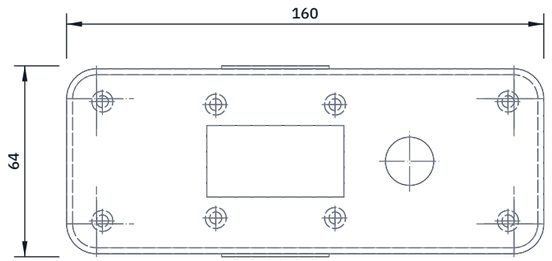

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

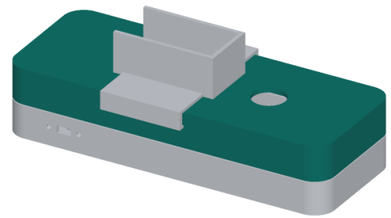

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print upside down (top face on the bed), same settings as the bottom shell.
Outside 160 x 62 x 17.4 mm; it sits on the gasket 16.6 mm up the body.
Display window 46 x 24 mm centred 10 mm behind the body centre.
Button hole 16.2 mm, 35 mm ahead of the body centre.
Four shell bosses reach down to meet the bottom shell bosses; they stop the gasket being squeezed below 0.6 mm. Press an M3 insert in each.
Four frame bosses at 30 mm behind and 10 mm ahead of centre, 19 mm out each side; press an M3 insert in each.
Two clip ribs 36 x 1 x 1 mm on the outside of the side walls, 28 mm up the body; the sun hood legs snap under them.
Inserts: soldering iron at about 230 C, push square, flush with the boss.
Check: each insert is square and flush; the ribs are unbroken.

WASTEWISE SCAN github.com/BoujeeEnjinia1701/wastewise-scan

WasteWise Scan top shell: making sketch

DRAWING NO.	REV	SHEET	SIZE
WSC-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
PETG, 3D printed

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com