


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

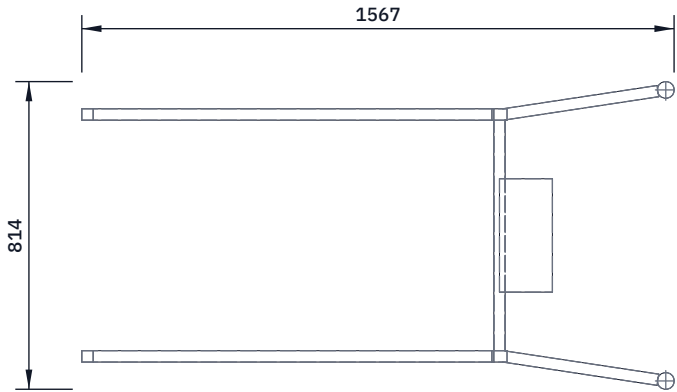


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

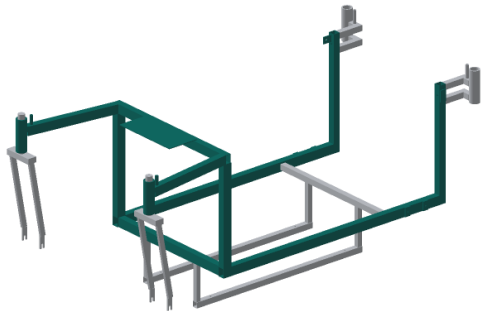

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut list (centre to centre lengths are in the build plan, Table 2):

side rails 2 x 1,125; front risers 2 x 442; caster arms 2 x 408, angled 8.6 degrees outward; lower cross member 610 and upper cross member 670 (40 x 30 x 1.2); hip sleeves 2 x 467 (30 x 30).

Build it upside down on a flat floor: rail centres 640 apart, square to the lower cross member; check the diagonals agree.

Risers stand on the rails at their front ends; the upper cross member sits on the riser tops; caster arms butt on its front face over each riser and are coped to the head tubes.

Head tubes upright, 770 apart, 1,590 ahead of the rear axle line.

Sleeves stand on the rail ends, rear faces flush with the rail ends.

Weld the receiver plate on the upper cross member, the pin guides on the caster arms, the guard tabs on the rails, the sensor tab.

Check: posts slide in the sleeves; head tubes parallel.

WATERWALKER

github.com/BoujeeEnjinia1701/waterwalker

WaterWalker frame weldment: making sketch

DRAWING NO. WWK-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel RHS 40 x 30 x 1.2 mm; square 30 x 30 x 1.5 mm sleeves; tube 44 mm OD head tubes					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	