REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

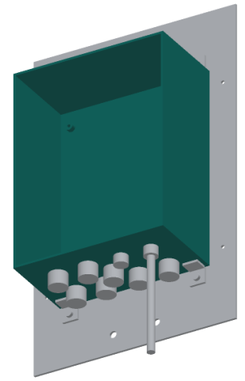

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: stand the box on its top, back face toward you; the top view then shows the bottom face as you see it on the bench.
Measure from the back face, and sideways from the centre line (left and right as seen from the front). See the drilling layout.
Back row, 28 from the back face: valve gland 62 left, chlorine gland 22 left, spare (plugged) 22 right, temperature gland 62 right: 16.2 mm.
Front row, 70 from the back face: panel gland 62 left, optics gland 22 left (16.2 mm); vent 22 right (12.2 mm); antenna 62 right (6.5 mm).
Middle row, 49 from the back face: status light lead gland on the centre line (16.2 mm).
Tape the face, pilot drill 3 mm slowly with wood behind, open out with a step drill, light pressure. No solvents: polycarbonate crazes.
Check each hole size on the part's datasheet before the last step.
Fit the maker's four lugs to the back corners, feet on top and bottom.

WATERWATCH github.com/BoujeeEnjinia1701/waterwatch

WaterWatch enclosure body: drilling sketch

DRAWING NO.	REV	SHEET	SIZE
WWT-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

Bought IP66 polycarbonate box 200 x 120 x 260 mm, four moulded bosses

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand