BUILD PLAN SKETCH, PLAN NOT YET BUILT

WellSense · github.com/BoujeeEnjinia1701/wellsense

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

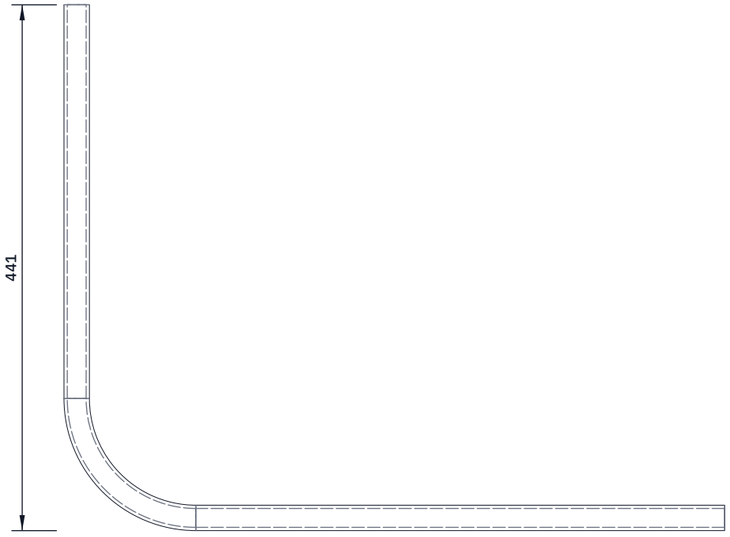

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One length with one 90 degree bend, 100 mm centre-line radius, made with a 1/2 in hand conduit bender.
Long leg (horizontal, toward the well): 543 to the bend's corner; short leg (vertical, into the box): 430 to the corner. Developed length about 0.95 m.
Mark the bend from the corner back along each leg; bend, then check the angle with a square and trim the ends to length.
Cut with a hacksaw or tube cutter, ream the ends so the bore cannot cut the cable, and paint each cut end with zinc-rich paint.
Fit: the short end screws into the hub under the box; two spacer saddles hold it to the plate; the long end takes the connector of the flexible tail over the well.
Check: both legs square; the ends are smooth inside.

WELLSENSE

github.com/BoujeeEnjinia1701/wellsense

WellSense rigid conduit: making sketch

DRAWING NO.	REV	SHEET	SIZE
WLS-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

1/2 in galvanized rigid conduit, 21.3 mm OD

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand