
BUILD PLAN SKETCH, PLAN NOT YET BUILT

WellSling · github.com/BoujeeEnjinia1701/wellsling

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-25	AC

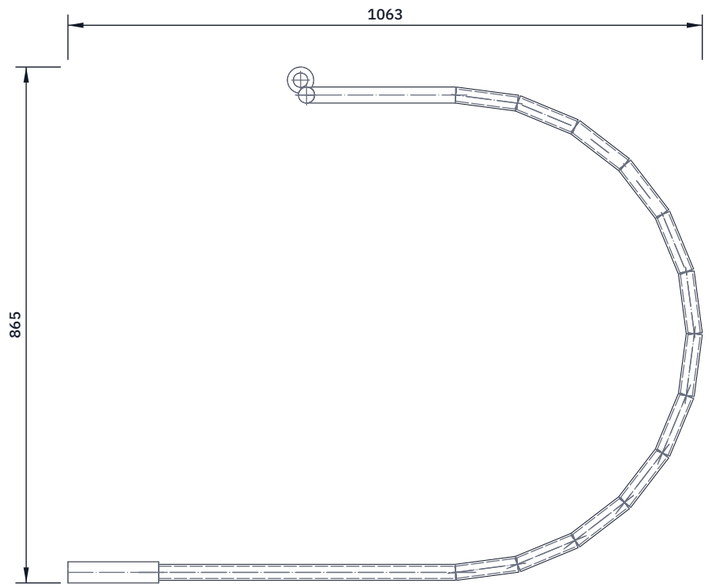

TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

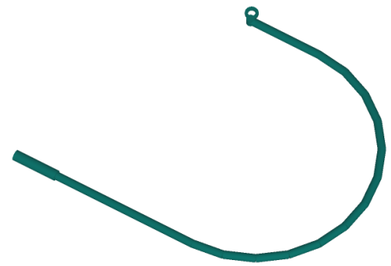

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Tube 26.9 x 3.2 mm: a 500 mm straight shank, then a half-turn bend of 400 mm radius, then a 250 mm nose.
Bend cold on a former; no kinks. Round the nose end smooth.
Line eye: 44 mm washer plate, 24 mm hole, welded at the nose.
Spigot: 35.5 mm tube, 150 mm long, welded into the shank end with the button lock, to fit any pole section.
It is a separate tool. It never fixes to the band.
Check: the J slides under a 400 mm body without snagging.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: passer J-head (make 1)

DRAWING NO.	REV	SHEET	SIZE
WSL-DWG-111	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

Steel tube 26.9 x 3.2 mm; 35.5 mm spigot; 6 mm plate eye

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand