BUILD PLAN SKETCH, PLAN NOT YET BUILT

ZeerBox · github.com/BoujeeEnjinia1701/zeerbox

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:25; looking down (along -Z)

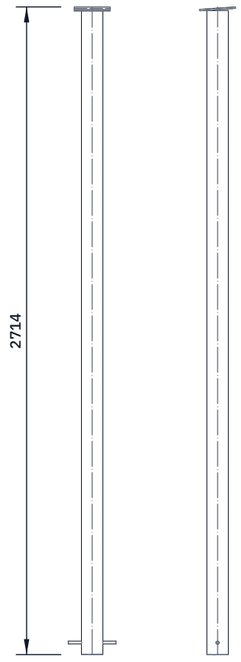

FRONT VIEW

Scale 1:25; looking at the front (along +Y)

RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

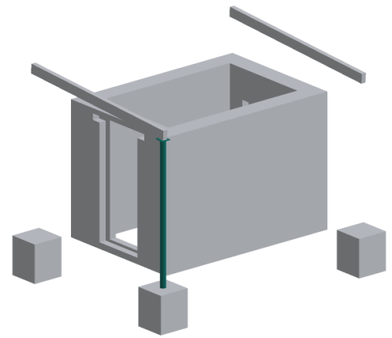

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pipe lengths: 2,703 mm for the two posts on the right (low) side, 2,899 mm for the two on the left (high) side. Square cuts.

Cap plate 150 x 150 x 6 mm, two 11 mm holes 80 mm apart on the beam line. Weld it to the pipe top tilted 4 degrees, sloping down toward the right side, square to the beam.

Drill 13 mm through the pipe 50 mm above its foot; push a 200 mm length of 12 mm bar through and weld both sides (holds against uplift). Paint the welds with zinc-rich paint.

Footing: hole 500 x 500 x 600 mm deep, centred 1,850 mm along and 1,400 mm across from the store centre (setting-out plan).

Stand the post 450 mm into the hole, plumb, plate tops on a string line: 2,253 mm above ground (right), 2,449 mm (left). Brace, pour.

Check: plumb both ways; plate tops within 5 mm of the line.

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox roof post and footing (make 4): making sketch

DRAWING NO.	REV	SHEET	SIZE
ZBX-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:25	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Galvanized steel pipe 89 mm outside, 3 mm wall; 6 mm steel plate; 12 mm bar

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand