BUILD PLAN SKETCH, PLAN NOT YET BUILT

ZeerBox · github.com/BoujeeEnjinia1701/zeerbox

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

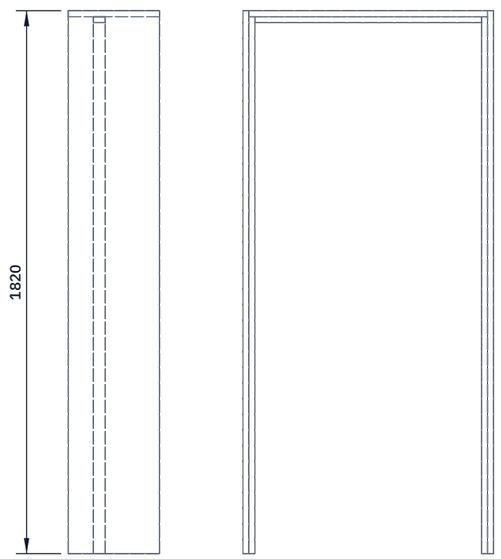

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

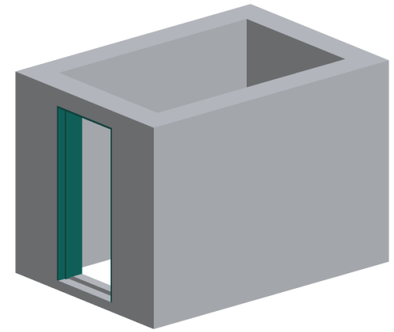

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Jambs: two boards 20 x 305 mm, 1,820 mm long.
Head: one board 20 x 305 mm, 800 mm long, between the jambs.
The lining covers the whole reveal and closes the cavity.
Fix each jamb with five screws in frame plugs into the inner and outer leaves; pack behind with timber wedges until plumb.
Clear opening inside the lining: 800 x 1,800 mm from the floor.
Stop beads 20 x 40 mm on both jambs and the head, 84 mm in from the outside face; a rubber seal along the outer face of the bead.
Check: lining plumb and square (diagonals within 3 mm).

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox door lining and stop beads: making sketch

DRAWING NO.	REV	SHEET	SIZE
ZBX-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Treated board 20 x 305 mm; bead 20 x 40 mm; rubber seal

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand