BUILD PLAN SKETCH, PLAN NOT YET BUILT

ZeerBox · github.com/BoujeeEnjinia1701/zeerbox

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

TOP VIEW

Scale 1:10; looking down (along -Z)



FRONT VIEW

Scale 1:10; looking at the front (along +Y)

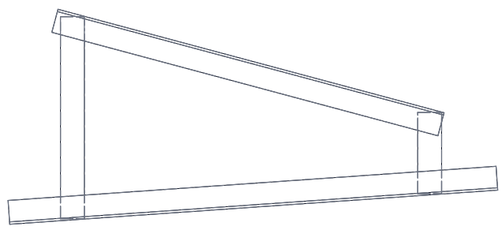

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

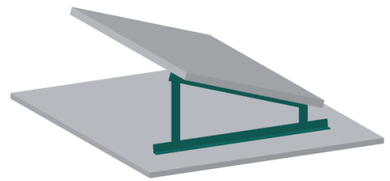

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base rail: angle 820 mm long, laid on the sheet down the slope, 560 mm each side of the store's centre line, across the two purlins 700 and 0 mm from the roof's middle (60 mm past each). Screw through the angle and a sheet crest into each purlin.
Top rail: angle 670 mm long under the panel's side edge; bolt the panel frame to it through the frame's own holes.
Legs: flat bar 40 x 4 mm, 339 mm (high side) and 136 mm (low side), 25 mm in from the top rail ends. Each leg bolts to the upright flanges of both rails with one M8 bolt top and bottom. Drill the leg holes on assembly so the panel sits at 15 degrees.
The two frames are mirror images.
Check: panel at 15 degrees within 1; all bolts tight.

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox panel mounting frame (make 2, a left and a right): making sketch

DRAWING NO.	REV	SHEET	SIZE
ZBX-DWG-113	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium angle 40 x 40 x 4 mm; flat bar 40 x 4 mm; M8 stainless bolts

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand