REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

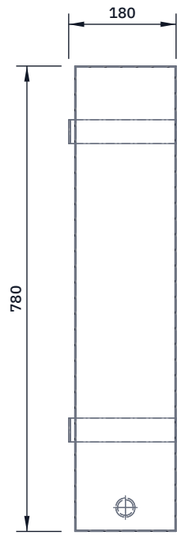

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

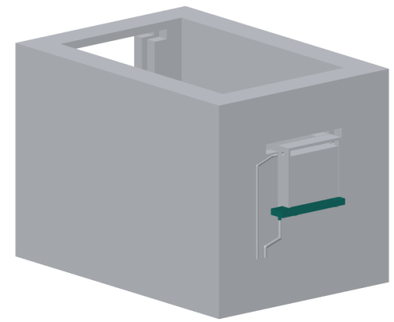

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Gutter: a channel 170 wide x 60 deep x 780 mm long, bent from sheet, both ends folded up and sealed.
Outlet: a 32 mm hole in the bottom 40 mm from the right end, 95 mm out from the wall; fit a 32 mm tank connector.
Brackets: two 40 x 3 mm strips bent to an L, 80 mm up the wall and 180 mm out, 250 mm each side of centre; two plugs each.
Fit: the gutter sits on the brackets with its top 20 mm below the pad, 10 mm off the wall, reaching 120 mm past the pad on the right and 60 mm on the left. Fall toward the outlet.
Check: pour water in; it all leaves by the outlet.

ZEERBOX github.com/BoujeeEnjinia1701/zeerbox

ZeerBox return gutter and brackets: making sketch

DRAWING NO.	REV	SHEET	SIZE
ZBX-DWG-117	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Galvanized sheet 0.5 mm; galvanized strip 40 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand