



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

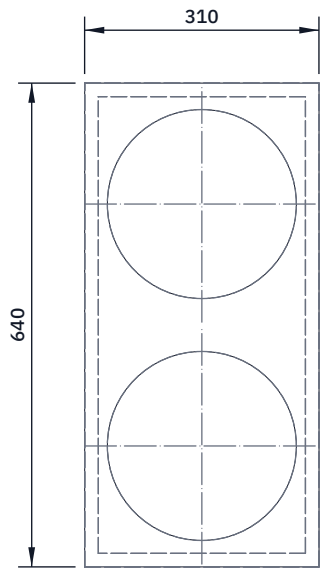

TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

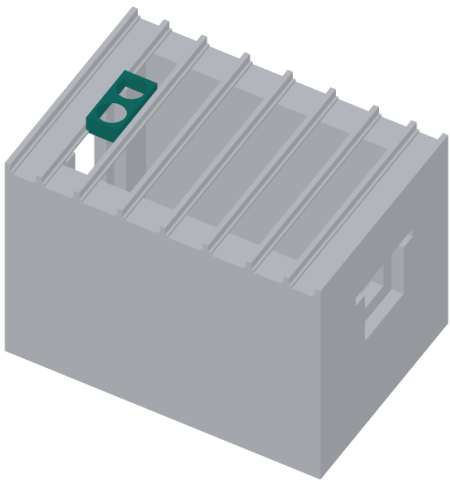

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A plywood tube 310 x 640 mm outside, 150 mm deep, with a top plate.

Long sides: two 640 x 150 mm. Short sides: two 274 x 150 mm, glued and screwed between the long sides.

Top plate 310 x 640 mm. Cut two 250 mm round holes, centred across the 310 mm width and 160 mm each side of the middle.

Glue and screw the plate on top of the tube.

Fit: the tube drops into the fan bay from above, its bottom edge flush with the joist undersides (the room ceiling). Four screws through each long side into the joist beside it.

The plate stands 30 mm above the ceiling boards.

Check: square; plate flat; seal the joints with sealant.

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox fan box: making sketch

DRAWING NO. ZBX-DWG-110		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES 18 mm exterior plywood, screws and wood glue				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	