
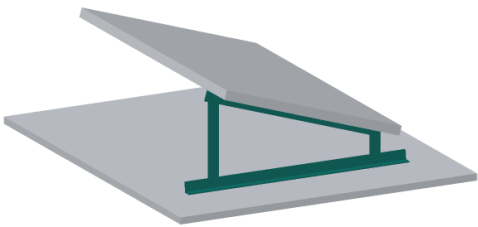


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

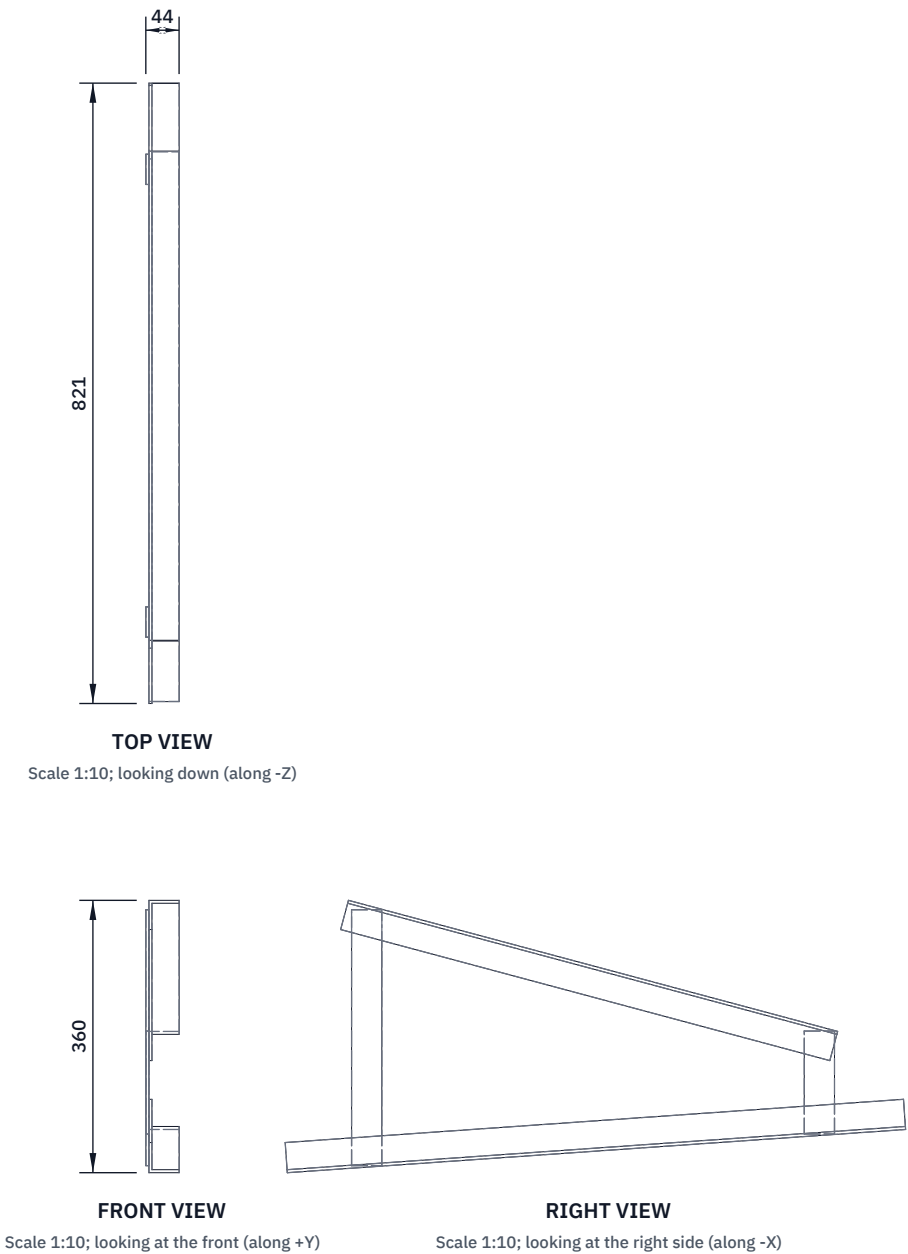

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Base rail: angle 820 mm long, laid on the sheet down the slope, 560 mm each side of the store's centre line, across the two purlins 700 and 0 mm from the roof's middle (60 mm past each).
Screw through the angle and a sheet crest into each purlin.
Top rail: angle 670 mm long under the panel's side edge; bolt the panel frame to it through the frame's own holes.
Legs: flat bar 40 x 4 mm, 339 mm (high side) and 136 mm (low side), 25 mm in from the top rail ends. Each leg bolts to the upright flanges of both rails with one M8 bolt top and bottom.
Drill the leg holes on assembly so the panel sits at 15 degrees.
The two frames are mirror images.
Check: panel at 15 degrees within 1; all bolts tight.

ZEERBOX		github.com/BoujeeEnjinia1701/zeerbox	
ZeerBox panel mounting frame (make 2, a left and a right): making sketch			
DRAWING NO. ZBX-DWG-113		REV P1	SHEET 1 of 1
		SIZE ANSI B	
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02
		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium angle 40 x 40 x 4 mm; flat bar 40 x 4 mm; M8 stainless bolts			
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com		Generated from cad/src; do not edit by hand	