


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

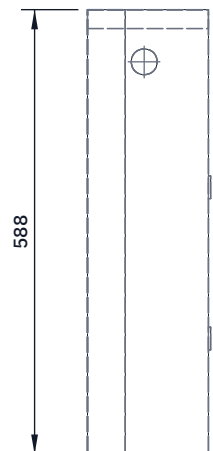


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

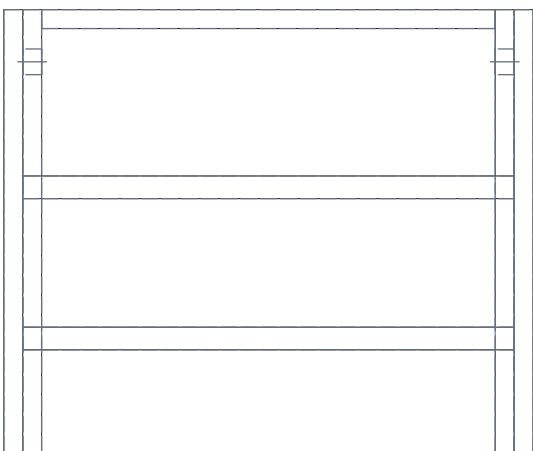

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

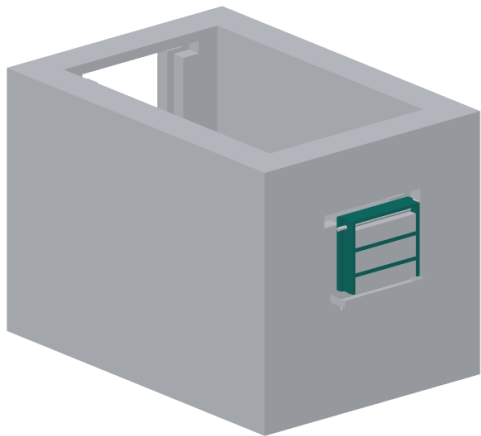

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Battens: two 25 x 50 mm, 585 mm long, plugged to the wall 325 mm each side of centre, from 1,000 to 1,585 mm above ground.

Sides: two boards 25 x 160 mm, 585 mm long, screwed to the battens' inner faces; 600 mm apart inside. In each, drill a 34 mm hole 75 mm from the wall and 516 mm up from the bottom for the drip header.

Top: one board 25 x 160 mm, 600 mm long, between the sides at the top.

Bottom bars: two 30 x 3 mm, 650 mm long, under the sides at 35 and 115 mm from the wall. The pad stands on them.

Front bars: two 30 x 3 mm, 650 mm long, across the sides' front edges, 150 and 350 mm up. They keep the pad in.

Check: inside 600 wide, 160 deep; bars level.

ZEERBOX

github.com/BoujeeEnjinia1701/zeerbox

ZeerBox pad frame: making sketch

DRAWING NO.

ZBX-DWG-115

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Treated board 25 mm; batten 25 x 50 mm; galvanized flat bar 30 x 3 mm