For installers, technicians and supervisors

Staff guide to the Vertical Solar app

How to sign in, set up your profile, see where you are expected, clock in on site, report problems and send your daily work report — all from your phone.



Vertical Energy & Networks Ltd

Version 4 · October 2026

What is in this guide

Read chapters 1 to 3 once before your first job. After that, the one-page "Every day on site" card at the end is all you need.

1 Before you start
2 Your first sign-in
3 Set up your staff profile
4 Your home screen: My field work
5 Your schedule and reminders
6 Clock in when you arrive
7 While you are on site
8 Report a problem — any time
9 Report completed work
10 Clock out when you leave
11 Notifications and phone alerts
12 Your profile and password
13 If you were given more sections
14 When something goes wrong
15 Every day on site (quick card)

The idea in one minute

Office schedules you
Which site, what day, what time.

›

You get reminders
An hour before, and if you are late.

›

You clock in on site
The phone checks you are really there.

›

You report
Problems any time; finished work with photos.

›

You clock out
Your hours are recorded for you.

Everything you do in the app is seen by the administrator straight away. You do not need to call the office to say you have arrived, and you do not need to wait until the end of the day to report a problem.

> **Who to ask for help**
> The administrator creates your login, gives you access, schedules you on sites and can reset your password. If anything in this guide does not match what you see, ask the administrator.

1 Before you start

You need a smartphone, a little data, and your login details from the administrator.

What you need

- [ ] **A smartphone** (Android or iPhone) with the **Chrome** browser on Android or **Safari** on iPhone.
- [ ] **Mobile data or Wi-Fi.** The app uses very little data, but it must be able to reach the internet when you clock in, report and clock out.
- [ ] **Location (GPS) switched on.** The app checks that you are at the job site when you clock in.
- [ ] **Your sign-in link:** the administrator sends you a private link (usually on WhatsApp) together with your work email. Sometimes they give you a temporary password instead.

Put the app on your home screen

The app opens in your browser, but you can add it to your home screen so it opens like any other app. On iPhone this is also what allows phone alerts to work.

Android (Chrome)

1. Open the login page in Chrome.
2. Tap the ⋮ menu at the top right.
3. Tap **Add to Home screen** (or **Install app**), then **Add**.

iPhone (Safari)

1. Open the login page in Safari.
2. Tap the **Share** button (square with an arrow).
3. Tap **Add to Home Screen**, then **Add**. Always open the app from this icon.

This guide is in the app


Open **Guides** from the menu (☰) at any time to read this guide on your phone.

Keep your login to yourself


Never share your password, and never sign in for someone else. Your clock-ins, locations and reports carry your name and photo.

2 Your first sign-in

The first time, you open your sign-in link and choose your own password. It takes less than a minute.

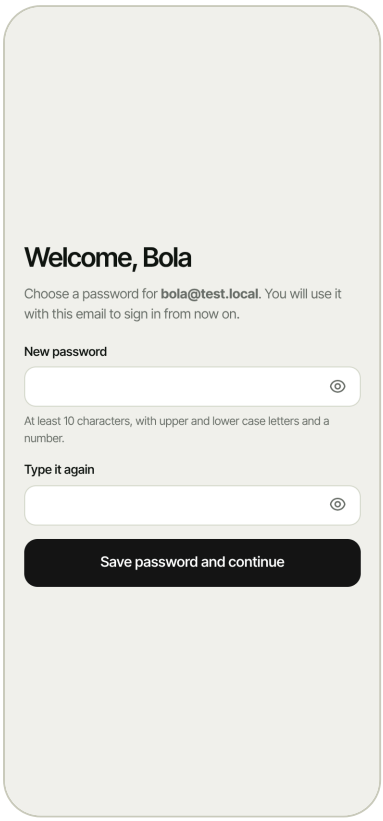

The sign-in link opens "Welcome" with your email already filled in.

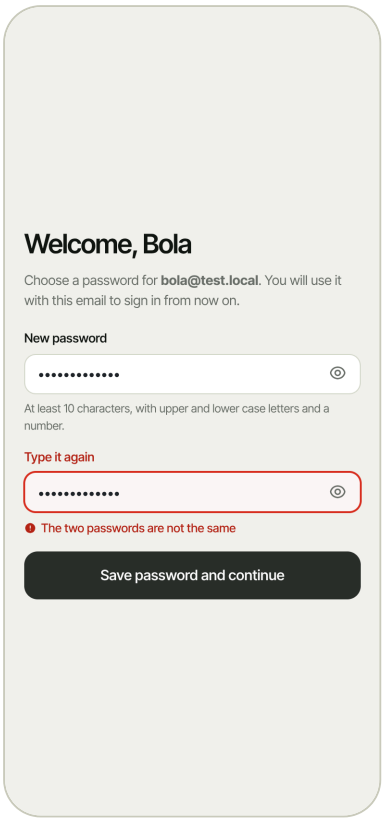


A problem is shown in red right under the box that needs fixing.

1. Open the **sign-in link** the administrator sent you, on the phone you will use at work. You see **Welcome, (your name)** and your work email.
2. Type a **new password** that only you know. It must have at least 10 characters, with upper-case letters, lower-case letters and a number — for example a short sentence like **MyLadder2Roofs** (do not use this example).
3. Type it again in **Type it again**. Tap the **eye icon** at the end of a box to see what you typed; tap it again to hide it.
4. Tap **Save password and continue**. You are signed in and taken to your profile set-up (next chapter).

> **The link works only once**
>
> As soon as you save your password, the link stops working. It also stops after 7 days if it is not used. If it says **Link not valid**, ask the administrator for a new one.

Signing in after that

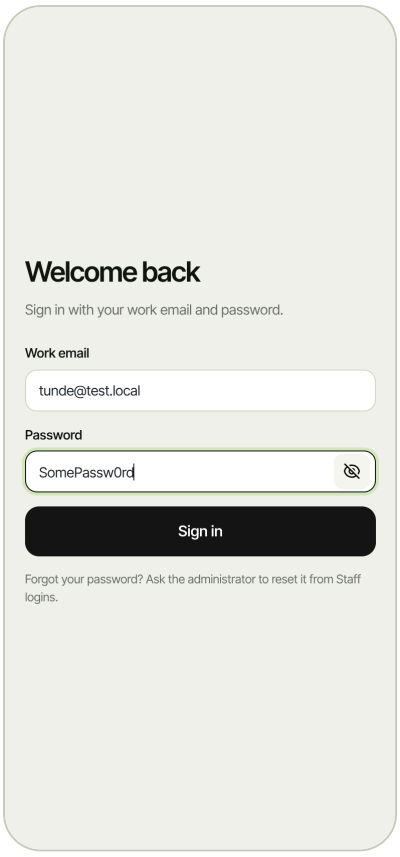

The sign-in page. The eye icon shows or hides your password.


1. Open the app from your home screen (or go to the website address followed by **/staff**).
2. Type your **work email** and **password**, then tap **Sign in**.
3. If the administrator gave you a **temporary password** instead of a link, sign in with it; the app then asks you to choose your own password straight away.

> **Forgot your password later?**
> There is no "reset by email". Ask the administrator to reset it from **Staff logins**. You get a new sign-in link and choose a new password again.

You stay signed in on your phone for 7 days at a time. Changing your password signs you out on your other devices.

3 Set up your staff profile

Before you can use the app, you add your photo and a few details. The administrator uses them to know who is on each site and who to call in an emergency. Only the administrator can see this information.

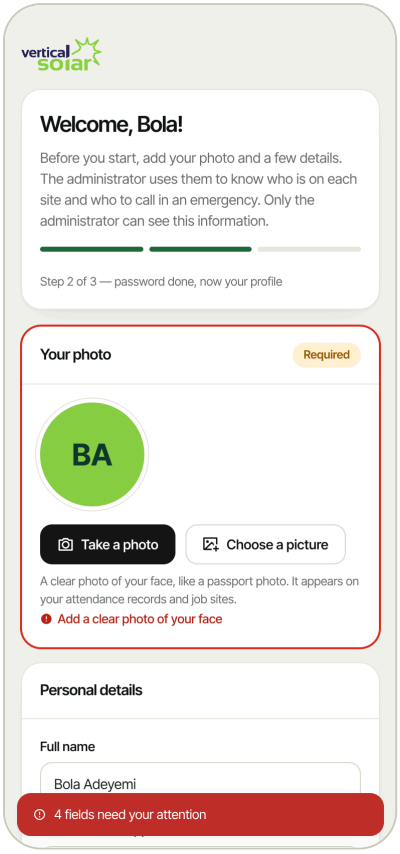


Step 2 of 3. Anything missing is outlined in red with a short message.

Your photo (required)


1. Tap **Take a photo** to use the camera, or **Choose a picture** to pick one from your gallery.
2. Use a clear photo of your face, like a passport photo: face the camera, good light, no sunglasses or cap.
3. The photo appears on your attendance records, on the job sites you are assigned to and in the administrator's staff list.

Personal details

Field	What to enter
Full name	Your real name as the customer should know you. **Required.**
Phone / WhatsApp	The number you answer on site. **Required.**
Date of birth	**Required.**
Home address	Start with the house number and building or street, e.g. *"No. 4, Green Court, Admiralty Way, Lekki"*, then **tap your address in the list.** **Address confirmed** means the exact building was found. If it says **Street confirmed**, add the house number or building name at the start. **Required.**
Gender, state of origin, marital status	Optional. "Prefer not to say" is fine.

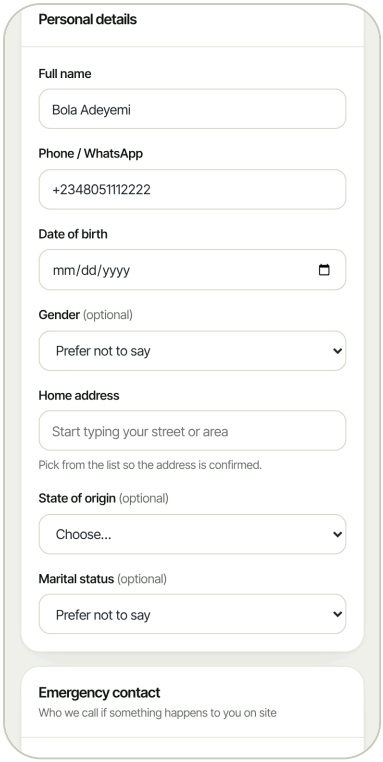

Personal details. Pick your home address from the list.

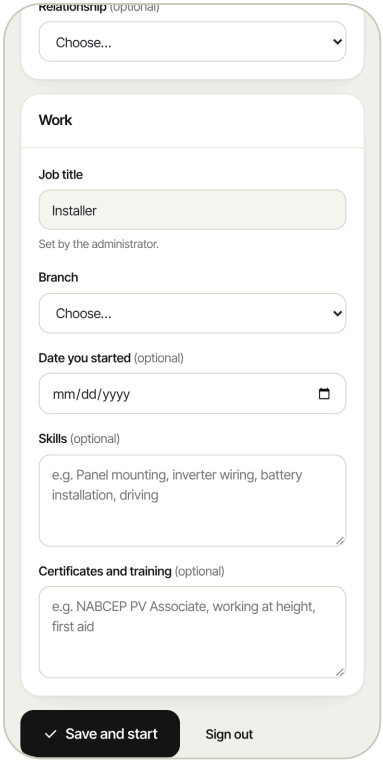

Work details, then “Save and start”.

Emergency contact (required)

The person we call if something happens to you on site: their **name**, **relationship** to you (optional) and **phone number**.


Work

Job title is set by the administrator and cannot be changed here. Choose your **branch**, and if you like add the date you started, your skills (for example “panel mounting, inverter wiring, driving”) and certificates or training (for example “NABCEP PV Associate, working at height, first aid”).

Tap **Save and start**. If anything required is missing, that box is outlined in **red** with a message right under it (for example *“This is required”*), and the page scrolls to the first one. Fix each red box and tap Save again. You can change these details any time from **My profile** (chapter 12).

4 Your home screen: My field work

After sign-in you land on **My field work**. Everything you need on site is on this one page — scroll down to see it all.

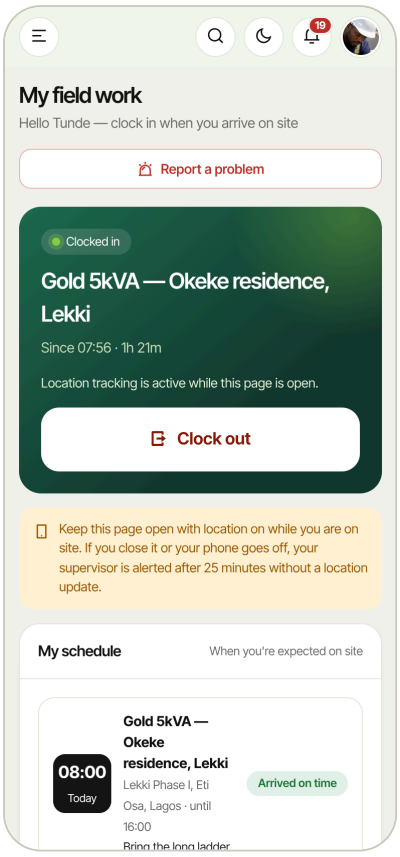

Tunde is clocked in at the Okeke residence.


From top to bottom

Top bar	☰ opens the menu. Then search, light/dark mode, the **bell** (your notifications, with a red count) and **your photo** (opens My profile).
Report a problem	Send a problem to the office at any moment (chapter 8).
Green clock card	Shows if you are clocked in or not, and the big **Clock in** / **Clock out** button.
My schedule	When and where you are expected (chapter 5).
My jobs	The job sites you are assigned to, with the address, the customer's name and phone, notes from the office and a **Directions** button that opens your maps app.
Report completed work	Your daily progress report with photos (chapter 9).
Problems I reported	Every problem you sent and whether the office has seen or resolved it.
My shifts	Your recent clock-ins and clock-outs.

> **No job yet?**
> If the clock card says **No job assigned yet**, the administrator has not added you to a job site. Call the office.

5 Your schedule and reminders

When the administrator sets a time for you to be on a site, it appears under **My schedule** and you get a notification straight away.

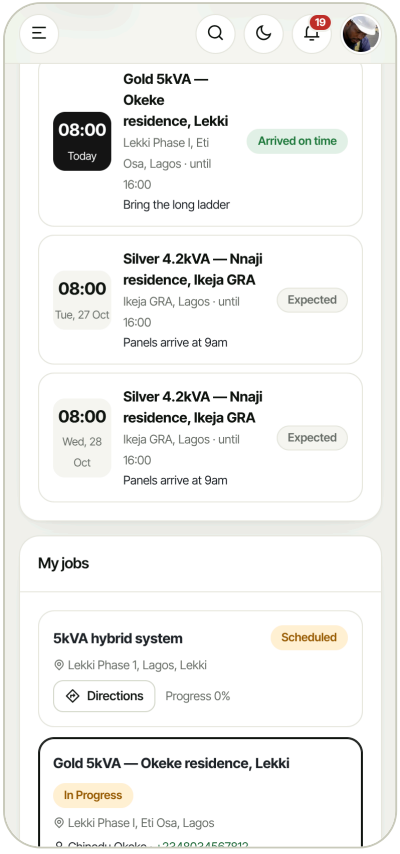

Today is highlighted. Each card shows the time, site, address, finish time and notes.

Reading a schedule card

The dark box shows the time you must be on site and the day ("Today", or the date). Next to it is the job site, the area, the finish time ("until 16:00") and any note from the office, such as *"Bring the long ladder"*. All times are Lagos time.

What the labels mean

Expected	You are scheduled. Nothing to do yet.
Arrived on time	You clocked in at that site on time (up to 10 minutes after the start is still on time).
Arrived 25 min late	You clocked in, but more than 10 minutes after the start time. The minutes are recorded.
Running late	The start time has passed and you have not clocked in. The card turns amber.
Missed	You did not clock in within 4 hours of the start time.

The reminders you will get


When	What happens
As soon as you are scheduled	"You're scheduled at …" with the date and time.
About 1 hour before	"Starting soon: …" — a reminder to set off.
About 10 minutes after the start, if you have not clocked in	"You're running late for …" — clock in as soon as you arrive, or call your supervisor.
About 30 minutes after the start	The administrator is told you have not arrived.
4 hours after the start	The schedule is marked **Missed**.

Running late? Tell the office

Reminders are checked every 10 minutes, so they can arrive a few minutes after the exact time. They do not replace a phone call: if you know you will be late, call your supervisor before the start time. If the office changes or cancels your schedule, you get a notification about that too.

6 Clock in when you arrive

You can only clock in when you are physically at the job site. The app checks your location automatically — there is nothing to type.

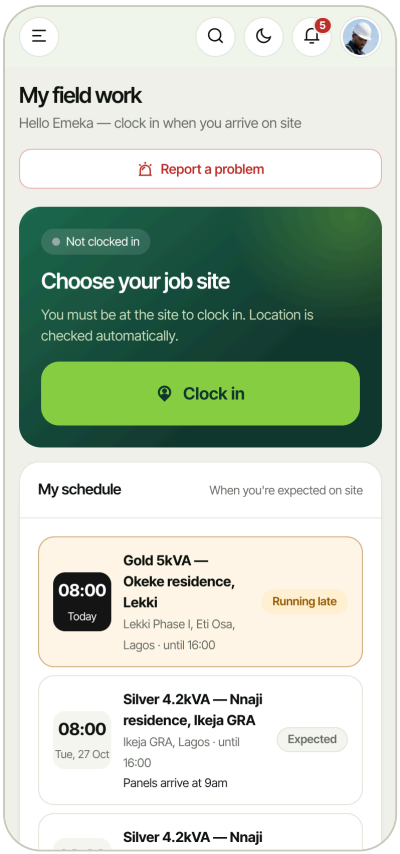

Emeka is not clocked in yet: "Choose your job site", the yellow Clock in button, and today's schedule shows "Running late".

1. Arrive at the site. Make sure **location is on** and you have data.
2. Open the app. If you have more than one job, scroll to **My jobs** and tap the job you are at — it gets a dark outline. (Today's scheduled site is chosen for you.)
3. Tap the yellow **Clock in** button.
4. The first time, your phone asks to share your location. Tap **Allow** (on iPhone choose **Allow While Using App**).
5. Wait a few seconds while it says **Checking your location…**. When it works, the card turns into **Clocked in** with the time you started.

Why it might refuse

Each site has a **clock-in zone** — a circle around the site (150 metres for most homes). If you are outside it, you see a message such as *"You are about 2.3km from Gold 5kVA — Okeke residence. You must be on site (within 150m) to clock in."* and the office is told that a clock-in was blocked.


- Walk into the compound and try again. GPS is better outdoors.
- Wait 20–30 seconds for the GPS to settle, then try again.
- If you are definitely at the right place and it still refuses, call the office — the site pin may be in the wrong place.

Late arrivals are recorded automatically

If you were scheduled at that site, your clock-in closes the schedule. If you clock in more than 10 minutes after the start time, the minutes late are saved and shown to the administrator. If the job was still "Scheduled", clocking in marks it "In progress".

7 While you are on site

While you are clocked in, your phone shares its location every few minutes so the office can see who is on site. It stops as soon as you clock out.

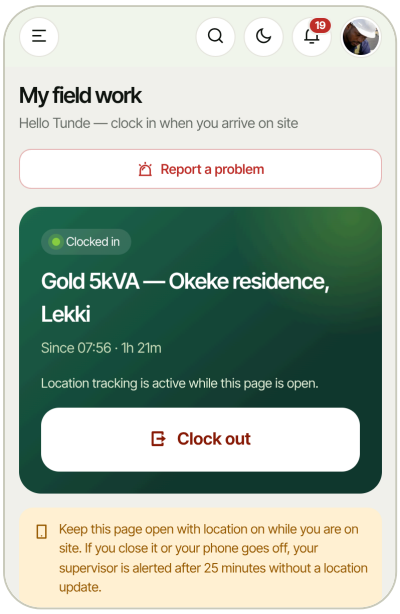

The yellow reminder appears while you are clocked in.

Keep the app open

Keep the page open with location on while you are on site. You can lock your screen, but do not close the app or browser tab, and do not switch off data.

If…	Then the office is told…
You leave the clock-in zone	that you left the site, and again when you come back. Time off site is added up on your shift.
Your phone stops sending location for 25 minutes	that there has been no location from you (phone off, no data, or app closed).


> **Need to leave the site?**
> Going to buy materials or to another site is normal — but tell your supervisor first. If you are finished for the day, clock out instead (chapter 10).

Your job card

Under **My jobs** you have the customer's name and a tap-to-call phone number, notes from the office (gate codes, where the inverter goes) and **Directions**.

8 Report a problem — any time

Missing materials, a faulty part, a safety risk, a customer issue, no access to the site — report it the moment it happens. You do not need to be clocked in and you do not need to wait until you clock out.

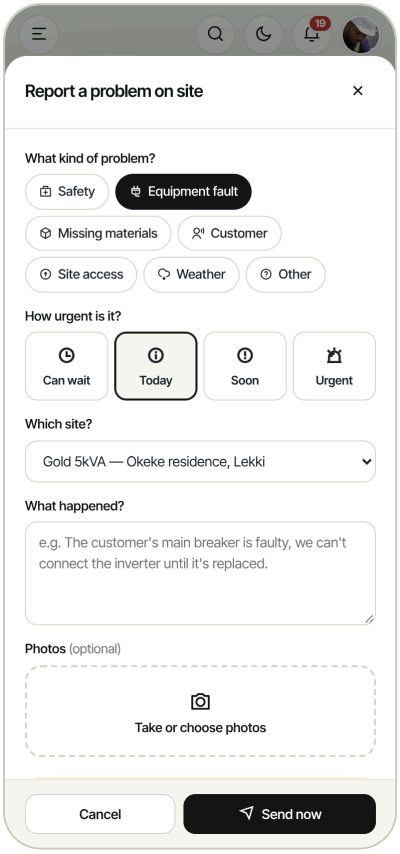

Report a problem on site.

1. Tap **Report a problem** at the top of My field work (or **+ New** under "Problems I reported").
2. **What kind of problem?** Tap one: Safety, Equipment fault, Missing materials, Customer, Site access, Weather or Other.
3. **How urgent is it?**
   - **Can wait** — deal with it this week.
   - **Today** — needs sorting today.
   - **Soon** — work is held up, needs attention within the hour.
   - **Urgent** — danger, injury, or work has stopped. Also **call** the office.
4. **Which site?** is filled in for you; change it if needed.
5. **What happened?** Say what is wrong and what you need, e.g. *"We are short of 2 MC4 connectors and one 63A DC breaker. Can someone bring them before 2pm?"*
6. Add up to 8 **photos** if they help (optional), then tap **Send now**.


What happens next

The administrator gets it immediately, including a phone alert. Under **Problems I reported** you can follow it: **New** → **Seen** → **Resolved**. When the office marks it seen or resolved, you get a notification, sometimes with a reply such as "Driver bringing them at 1pm".

> **In an emergency, phone first**
>
> If someone is hurt or there is fire, smoke or an electrical danger, make the area safe and call for help first. Report in the app afterwards.

9 Report completed work

At the end of each day — or when you finish an important stage — send a short work report with photos. This is how the office and the customer know how far the job is.

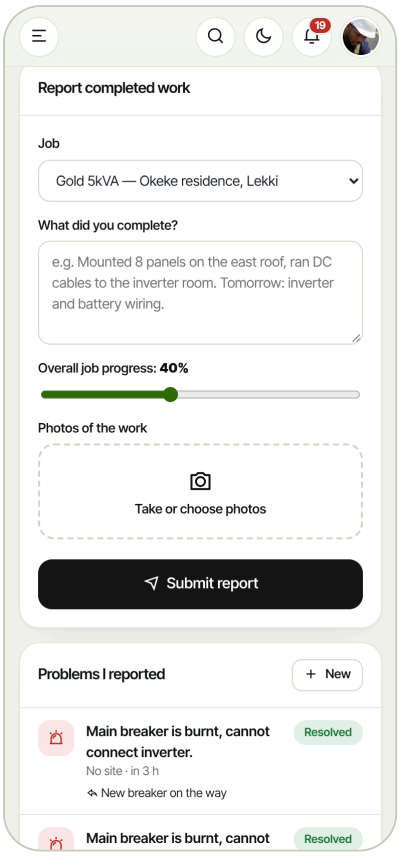

Report completed work.

1. Scroll down to **Report completed work**.
2. **Job**: check the right job site is selected.
3. **What did you complete?** Write what was done and what is next, e.g. *"Mounted 6 panels on the east roof, ran DC cables to the inverter room. Tomorrow: inverter and battery wiring."*
4. **Overall job progress**: drag the slider to how complete the whole job is now (for example 40%). The job's progress in the office only ever goes up.
5. Tap **Take or choose photos** and add clear photos of the work — up to 10. Photos are made smaller automatically to save data.
6. Tap **Submit report**.

Good photos

- The whole array from a distance, then close-ups of mounting and cable runs.
- The inverter and battery area, with labels readable.
- The DB and breakers, cover off, before you close up.

> **Reports are reviewed**
>
> The administrator reviews each report and may add a note. If something needs redoing you will be told.

10 Clock out when you leave

Clock out before you leave the site at the end of the day. This records your hours and switches off location sharing.


1. Send your work report first (chapter 9).
2. While you are still on site, tap the white **Clock out** button on the green card.
3. Your location is checked once more. You see a message such as **“Clocked out · 8.2h on shift”**.

If you clock out after you have already left, it still works, but the office sees how far from the site you were when you clocked out.

> **Forgot to clock out?**
> Your shift stays open and the office gets a “no location” alert once your phone stops reporting. After 14 hours the shift is closed automatically at the time your phone last reported. Tell the administrator what time you actually left so your record can be corrected.

11 Notifications and phone alerts

The bell at the top shows your notifications: schedules, reminders, new jobs, replies to your problems. The red number is how many you have not read.

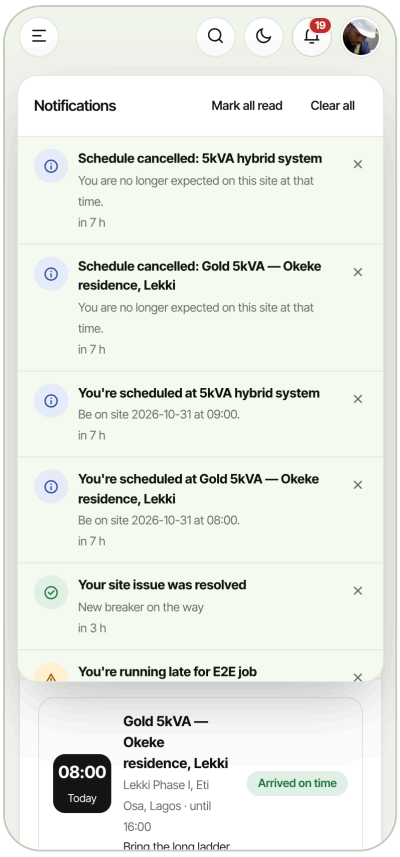

Your notifications. Tap ✕ to remove one.

Using the bell


- Tap the **bell** to open the list. Tap a notification to go to the right page.
- Tap ✕ on a notification to close it. It is removed for you and does not come back.
- **Mark all read** clears the red number but keeps the list.
- **Clear all** removes everything in the list.

Turn on phone alerts

Phone alerts pop up like a WhatsApp message, even when the app is closed. You need them for the "Starting soon" and "Running late" reminders.

1. Open **My profile** (tap your photo, top right).
2. Find **Alerts on this device** and tap **Turn on alerts**.
3. When your phone asks, tap **Allow**.

Do this on each phone you use.

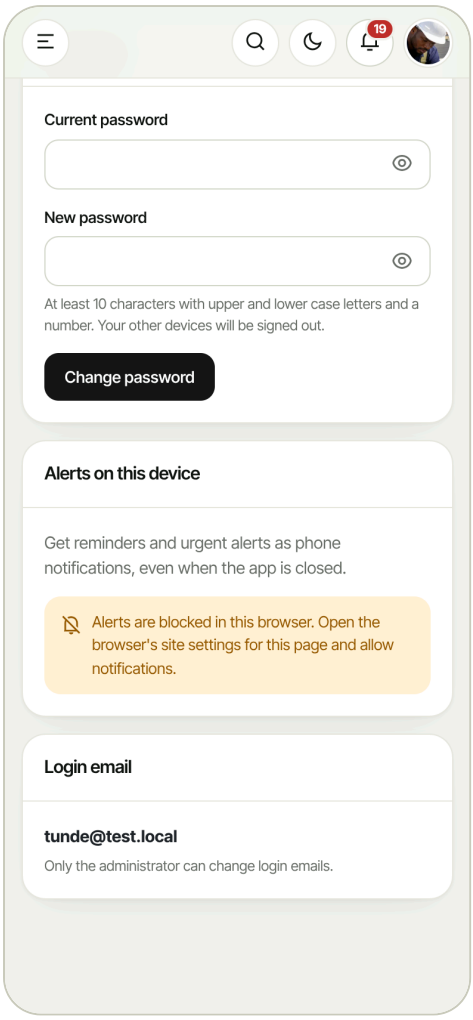

If alerts were blocked before, the card tells you how to allow them.

iPhone

Alerts only work when the app was added to the Home Screen (chapter 1) and opened from that icon, on iOS 16.4 or newer.

Alerts are blocked?

Android Chrome: tap the icon to the left of the address → **Permissions** → **Notifications** → Allow. iPhone: **Settings** → **Notifications**, find Vertical Solar and allow.

12 Your profile and password

Tap your photo at the top right and choose **My profile**. Here you keep your photo and details up to date, change your password and turn alerts on.

- **New phone number or address?** Change it and tap **Save**. Pick the address from the list so it is confirmed — include the house number or building name.
- **New photo?** Tap **Take a photo** or **Choose a picture**.
- **Change password**: type your current password, then the new one (at least 10 characters with upper and lower case letters and a number), and tap **Change password**. You are signed out on your other devices.
- **Login email** can only be changed by the administrator.
- **Sign out**: open the menu (☰). At the bottom, next to your name, tap the sign-out icon ⇥. Always sign out if you used someone else's phone.

Light and dark mode

The moon/sun button in the top bar switches between a light and a dark screen. Dark mode is easier on the eyes at night; light mode is easier to read in sunlight.

13 If you were given more sections

The administrator decides what each person can use. A field technician usually sees only **My field work**. A supervisor or office staff member may see more sections in the menu (☰).

Section	What it is for
Installations	All job sites: address and clock-in zone, crew, schedule, progress, work reports and attendance for each job.
Staff & schedules	Who is on site now (live map), the schedule for everyone, staff profiles and clock-in history.
Site issues	Problems reported from site. Mark them seen or resolved and reply.
Maintenance & warranty	Service visits and warranty records for finished installations.
Customers & leads, Follow-ups, Quotes	Sales work: customer records, reminders to call, and solar quotations sent by link.
Inventory, Shop & orders	Stock levels, stock in/out, suppliers, online shop orders.
Customer support	Fault reports and warranty claims from customers.

The **Administrator guide** explains each of these sections step by step — ask the administrator for a copy if you need it. If you need access to a section you cannot see, ask the administrator; they can switch it on instantly.

14 When something goes wrong

Problem	What to do
"Incorrect email or password"	Check the email is your work email and the password is typed exactly (capitals matter). After 6 wrong tries the login is locked for 15 minutes. Still stuck? Ask the administrator to reset your password.
The app asks me to fill in my profile again	A required field is empty — usually the photo, date of birth, home address or emergency contact. Fill it in and tap Save and start.
Clock in says I am too far from the site	Walk into the compound, wait 30 seconds for GPS, try again. If you are at the right place, call the office — the site pin may need moving.
"Location is blocked" / nothing happens on Clock in	Your phone is not sharing location with the app. Android: tap the icon left of the address → Permissions → Location → Allow. iPhone: Settings → Privacy & Security → Location Services → Safari Websites → While Using.
I see "No job assigned yet"	The administrator has not added you to a job. Call the office.
My schedule is empty	You have not been scheduled for the next two weeks. You can still clock in at any job in My jobs.
I don't get phone alerts	Turn them on in My profile → Alerts on this device. On iPhone, open the app from the Home Screen icon. Check that the phone is not in Do Not Disturb.
Photo upload fails	Check you have data. Try fewer photos at once. Photos are compressed automatically.
The page looks stuck or empty	Pull down to refresh, or close and reopen the app. If you see "This page didn't load", check your data and tap **Try again**.
I lost my phone	Tell the administrator immediately. They can switch off your login and give you a new one.

15 Every day on site

Cut out or screenshot this page.

Before you leave home

Check **My schedule**: which site, what time, any note.

Phone charged, data on, **location on**.

Running late? **Call your supervisor** before the start time.

When you arrive

- [ ] Open the app, check the right job is selected.
- [ ] Tap **Clock in** inside the compound.
- [ ] Keep the app open while you work.

During the day

- [ ] Problem? **Report a problem** straight away, with photos.
- [ ] Urgent or dangerous? **Phone first**, then report.
- [ ] Leaving the site? Tell your supervisor.

Before you leave

- [ ] **Report completed work**: what you did, what is next, progress %, photos.
- [ ] Tap **Clock out** while still on site.
- [ ] Check notifications for tomorrow's schedule.

Safety always comes first

No report, schedule or reminder is more important than working safely. Use the right PPE, isolate DC and AC before touching connections, and never work on a roof alone.