G-Matrix Systems
Integrated System Design

DATA SHEET

CONNECTIVITY
SigFox RCZ1 - Class 0
LoraWAN Capable

BATTERY
Up To 5 Years Battery Life*
Online Battery Indicator
Heartbeat Sent Once a Day

SPECIFICATIONS
SigFox Certified
ICASA Approved
IP65 Rugged Enclosure
Dimensions (LxWxH): 120x20x110mm
Operating Temperature: -10℃ to +60℃

CLOUD COMPUTING SERVICES
RAMAC™ Platform is MS AZURE Hosted
3rd Party Integration Available
Client Customisation

Turnkey IoT Solutions
Hardware Development, Prototyping, Firmware Development, Database Design, Testing Integration and Web Integration.

Contact Us
+27 87 803 9987 | +27 72 594 8408
www.g-matrixsystems.com

V2.2024

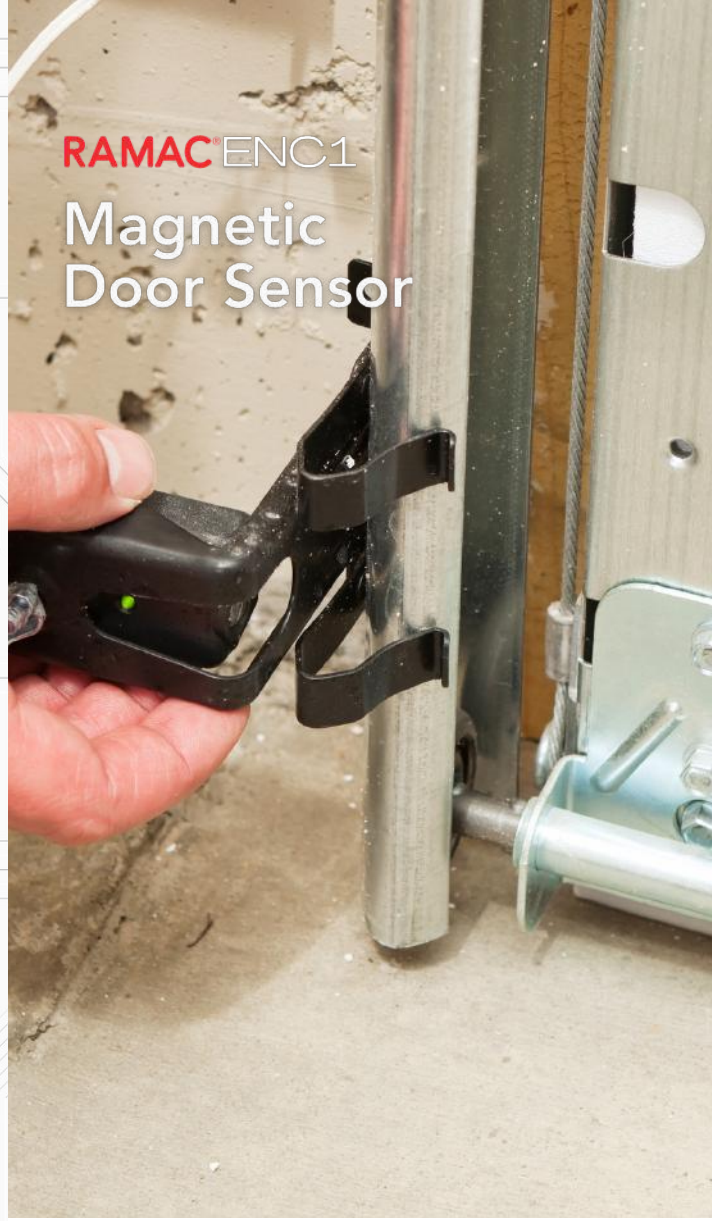

G-Matrix Systems
Integrated System Design

RAMAC® ENC1

Magnetic Door Sensor

The RAMAC™ ENC1 provides dependable access monitoring and tracking.

Utilizing advanced magnetic technology, the RAMAC™ ENC1 accurately detects changes in its magnetic field, making it ideal for seamless monitoring of doors, windows, security gates, and other entry points.

Suitable for both residential and commercial applications, the RAMAC™ ENC1 enhances security, controls access, and maintains a comprehensive log of entry events.

RAMAC® Portal Integration

Our designs are focused on low power developments that create intelligent IoT solutions with seamless integration with the RAMAC™ Portal and third party software to provide you with a complete world class technological solution.

RAMAC® ENC1 Features

- Installation of the RAMAC™ ENC1 is managed through the RAMAC™ App.
- Workorders can be scheduled through the RAMAC™ Portal.
- Once movement is detected, the device transmits an alert the RAMAC™ Portal for live monitoring purposes.
- Once the enclosure has been opened without a workorder, the device will transmit a Tamper Alert.
- Multiple magnet inputs can be connected in series on request.
- The RAMAC™ ENC1 is a small and compact device.
- Daily self diagnoses via the Heartbeat message.
- Firmware can be upgraded via the RAMAC™ App.