

## **CMOS MSI**

#### Quad R-S Latches

# MC14043B, MC14044B

The MC14043B and MC14044B quad R-S latches are constructed with MOS P-Channel and N-Channel enhancement mode devices in a single monolithic structure. Each latch has an independent Q output and set and reset inputs. The Q outputs are gated through three-state buffers having a common enable input. The outputs are enabled with a logical "1" or high on the enable input; a logical "0" or low disconnects the latch from the Q outputs, resulting in an open circuit at the Q outputs.

#### **Features**

- Double Diode Input Protection
- Three–State Outputs with Common Enable
- Outputs Capable of Driving Two Low-power TTL Loads or One Low-Power Schottky TTL Load Over the Rated Temperature
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

#### MAXIMUM RATINGS (Voltages Referenced to V<sub>SS</sub>)

Symbol	Parameter	Value	Unit
$V_{DD}$	DC Supply Voltage Range	-0.5 to +18.0	V
V <sub>in</sub> , V <sub>out</sub>	Input or Output Voltage Range (DC or Transient)	-0.5 to V <sub>DD</sub> + 0.5	V
I <sub>in</sub> , I <sub>out</sub>	Input or Output Current (DC or Transient) per Pin	±10	mA
P <sub>D</sub>	Power Dissipation, per Package (Note 1)	500	mW
T <sub>A</sub>	Ambient Temperature Range	-55 to +125	°C
T <sub>stg</sub>	Storage Temperature Range	-65 to +150	°C
TL	Lead Temperature (8–Second Soldering)	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Temperature Derating: "D/DW" Packages: -7.0 mW/°C From 65°C To 125°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, Vin and Vout should be constrained to the range  $V_{SS} \le (V_{in} \text{ or } V_{out}) \le V_{DD}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ). Unused outputs must be left open.

March, 2022 - Rev. 11



#### **MARKING DIAGRAM**



хx = Specific Device Code = Assembly Location


WL. L = Wafer Lot YY, Y = Year WW, W = Work Week = Pb-Free Indicator

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 5 of this data sheet.

MC14043B/D

#### **PIN ASSIGNMENT**

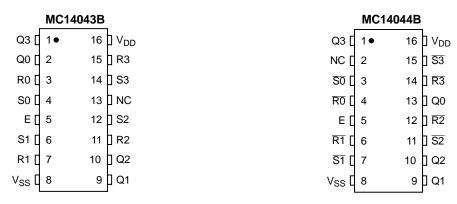

NC = NO CONNECTION

Figure 1.

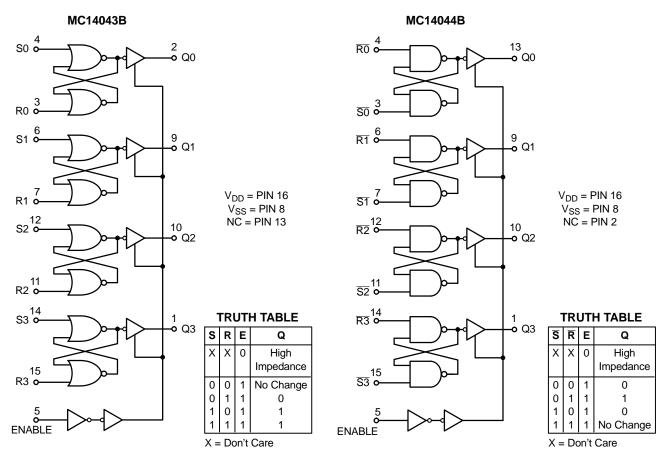


Figure 2.

#### **ELECTRICAL CHARACTERISTICS** (Voltages Referenced to V<sub>SS</sub>)

				- 5	5°C		25°C		125	5°C	
Characteristic		Symbol	V <sub>DD</sub> Vdc	Min	Max	Min	Typ (Note 2)	Max	Min	Max	Unit
Output Voltage V <sub>in</sub> = V <sub>DD</sub> or 0	"0" Level	V <sub>OL</sub>	5.0 10 15	- - -	0.05 0.05 0.05	- - -	0 0 0	0.05 0.05 0.05	- - -	0.05 0.05 0.05	Vdc
V <sub>in</sub> = 0 or V <sub>DD</sub>	"1" Level	V <sub>OH</sub>	5.0 10 15	4.95 9.95 14.95	- - -	4.95 9.95 14.95	5.0 10 15	- - -	4.95 9.95 14.95	- - -	Vdc
Input Voltage ( $V_O = 4.5 \text{ or } 0.5 \text{ Vdc}$ ) ( $V_O = 9.0 \text{ or } 1.0 \text{ Vdc}$ ) ( $V_O = 13.5 \text{ or } 1.5 \text{ Vdc}$ )	"0" Level	V <sub>IL</sub>	5.0 10 15	- - -	1.5 3.0 4.0	- - -	2.25 4.50 6.75	1.5 3.0 4.0	- - -	1.5 3.0 4.0	Vdc
$(V_O = 0.5 \text{ or } 4.5 \text{ Vdc})$ $(V_O = 1.0 \text{ or } 9.0 \text{ Vdc})$ $(V_O = 1.5 \text{ or } 13.5 \text{ Vdc})$	"1" Level	V <sub>IH</sub>	5.0 10 15	3.5 7.0 11	- - -	3.5 7.0 11	2.75 5.50 8.25	- - -	3.5 7.0 11	- - -	Vdc
Output Drive Current (V <sub>OH</sub> = 2.5 Vdc) (V <sub>OH</sub> = 4.6 Vdc) (V <sub>OH</sub> = 9.5 Vdc) (V <sub>OH</sub> = 13.5 Vdc)	Source	ІОН	5.0 5.0 10 15	-3.0 -0.64 -1.6 -4.2	- - -	-2.4 -0.51 -1.3 -3.4	-4.2 -0.88 -2.25 -8.8	- - -	-1.7 -0.36 -0.9 -2.4	- - -	mAdc
$(V_{OL} = 0.4 \text{ Vdc})$ $(V_{OL} = 0.5 \text{ Vdc})$ $(V_{OL} = 1.5 \text{ Vdc})$	Sink	I <sub>OL</sub>	5.0 10 15	0.64 1.6 4.2	- - -	0.51 1.3 3.4	0.88 2.25 8.8	- - -	0.36 0.9 2.4	- - -	mAdc
Input Current		I <sub>in</sub>	15	_	±0.1	-	±0.00001	±0.1	_	±1.0	μAdc
Input Capacitance (V <sub>in</sub> = 0)		C <sub>in</sub>	1	-	-	-	5.0	7.5	-	-	pF
Quiescent Current (Per Package)		I <sub>DD</sub>	5.0 10 15	- - -	1.0 2.0 4.0	- - -	0.002 0.004 0.006	1.0 2.0 4.0	- - -	30 60 120	μAdc
Total Supply Current (Notes 3 & 4) (Dynamic plus Quiescent, Per Package) (C <sub>L</sub> = 50 pF on all outputs all buffers switching)		I <sub>T</sub>	5.0 10 15			$I_{T} = (1$	.58 μΑ/kHz) .15 μΑ/kHz) .73 μΑ/kHz)	f + I <sub>DD</sub>			μAdc
Three-State Output Leaka Current	ge	I <sub>TL</sub>	15	-	±0.1	-	±0.0001	±0.1	-	±3.0	μAdc

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

$$I_T(C_L) = I_T(50 \text{ pF}) + (C_L - 50) \text{ Vfk}$$

where:  $I_T$  is in  $\mu A$  (per package),  $C_L$  in pF,  $V = (V_{DD} - V_{SS})$  in volts, f in kHz is input frequency, and k = 0.004.

The formulas given are for the typical characteristics only at 25°C.
 To calculate total supply current at loads other than 50 pF:

#### **SWITCHING CHARACTERISTICS** (Note 5) ( $C_L = 50 \text{ pF}, T_A = 25^{\circ}\text{C}$ )

Characteristic	Symbol	V <sub>DD</sub> Vdc	Min	Typ (Note 6)	Max	Unit
Output Rise Time $t_{TLH} = (1.35 \text{ ns/pF}) C_L + 32.5 \text{ ns}$ $t_{TLH} = (0.60 \text{ ns/pF}) C_L + 20 \text{ ns}$ $t_{TLH} = (0.40 \text{ ns/pF}) C_L + 20 \text{ ns}$	t <sub>TLH</sub>	5.0 10 15	- - -	100 50 40	200 100 80	ns
Output Fall Time $t_{THL} = (1.35 \text{ ns/pF}) C_L + 32.5 \text{ ns}$ $t_{THL} = (0.60 \text{ ns/pF}) C_L + 20 \text{ ns}$ $t_{THL} = (0.40 \text{ ns/pF}) C_L + 20 \text{ ns}$	t <sub>THL</sub>	5.0 10 15	- - -	100 50 40	200 100 80	ns
Propagation Delay Time $t_{PLH} = (0.90 \text{ ns/pF})  C_L + 130 \text{ ns}$ $t_{PLH} = (0.36 \text{ ns/pF})  C_L + 57 \text{ ns}$ $t_{PLH} = (0.26 \text{ ns/pF})  C_L + 47 \text{ ns}$	t <sub>PLH</sub>	5.0 10 15	- - -	175 75 60	350 175 120	ns
$t_{PHL}$ = (0.90 ns/pF) $C_L$ + 130 ns $t_{PHL}$ = (0.90 ns/pF) $C_L$ + 57 ns $t_{PHL}$ = (0.26 ns/pF) $C_L$ + 47 ns	t <sub>PHL</sub>	5.0 10 15	- - -	175 75 60	350 175 120	ns
Set, Set Pulse Width	t <sub>W</sub>	5.0 10 15	200 100 70	80 40 30	- - -	ns
Reset, Reset Pulse Width	t <sub>W</sub>	5.0 10 15	200 100 70	80 40 30	- - -	ns
Three-State Enable/Disable Delay	t <sub>PLZ</sub> , t <sub>PHZ</sub> , t <sub>PZL</sub> , t <sub>PZH</sub>	5.0 10 15	- - -	150 80 55	300 160 110	ns

- 5. The formulas given are for the typical characteristics only at 25°C.6. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

#### **AC WAVEFORMS**

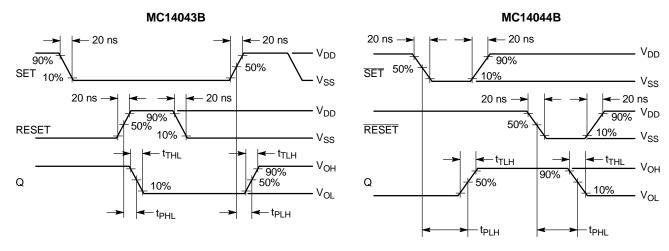


Figure 3.

#### THREE-STATE ENABLE/DISABLE DELAYS

Set, Reset, Enable, and Switch Conditions for 3-State Tests

					MC14043B		MC14044B	
Test	Enable	S1	S2	Q	S	R	<u>s</u>	R
t <sub>PZH</sub>		Open	Closed	Α	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{DD}$
t <sub>PZL</sub>		Closed	Open	В	$V_{SS}$	$V_{DD}$	$V_{DD}$	$V_{SS}$
t <sub>PHZ</sub>	~	Open	Closed	Α	$V_{DD}$	$V_{SS}$	$V_{SS}$	$V_{DD}$
t <sub>PLZ</sub>	~	Closed	Open	В	$V_{SS}$	$V_{DD}$	$V_{DD}$	$V_{SS}$




Figure 4.




Figure 5.

#### **ORDERING INFORMATION**


Device	Package	Shipping <sup>†</sup>
MC14043BDG	SOIC-16 (Pb-Free)	48 Units / Rail
NLV14043BDG*	SOIC-16 (Pb-Free)	48 Units / Rail
MC14043BDR2G	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel
NLV14043BDR2G*	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel

MC14044BDG	SOIC-16 (Pb-Free)	48 Units / Rail
MC14044BDR2G	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel
NLV14044BDR2G*	SOIC-16 (Pb-Free)	2500 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

## **MECHANICAL CASE OUTLINE**

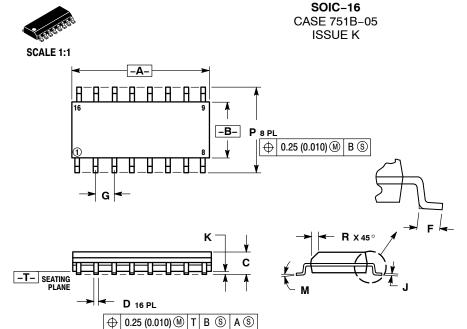

**DATE 29 DEC 2006** 

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI
- THE NOTION AND TOLETANOING FER ANSI'Y 14.5M, 1982.
  CONTROLLING DIMENSION: MILLIMETER.
  DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
- PHOI HUSION.

  MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

  DIMENSION D DOES NOT INCLUDE DAMBAR
  PROTRUSION. ALLOWABLE DAMBAR PROTRUSION

  SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D

  DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIN	METERS	INC	HES	
DIM	MIN	MIN MAX		MAX	
Α	9.80	9.80 10.00		0.393	
В	3.80	4.00	0.150	0.157	
C	1.35	1.75	0.054	0.068	
D	0.35	0.49	0.014	0.019	
F	0.40	1.25	0.016	0.049	
G	1.27	BSC	0.050	BSC	
J	0.19	0.25	0.008	0.009	
K	0.10	0.25	0.004	0.009	
M	0°	7°	0°	7°	
Ρ	5.80	6.20	0.229	0.244	
R	0.25	0.50	0.010	0.019	

2. 3.	COLLECTOR BASE EMITTER NO CONNECTION EMITTER BASE COLLECTOR COLLECTOR BASE EMITTER NO CONNECTION EMITTER BASE EMITTER BASE EMITTER BASE	2. 3. 4. 5. 6. 7. 8. 9. 10.	CATHODE ANODE	2. 3. 4. 5. 6. 7. 8. 9. 10.	COLLECTOR, DYE #1 BASE, #1 EMITTER, #1 COLLECTOR, #1 COLLECTOR, #2 BASE, #2 EMITTER, #2 COLLECTOR, #2 COLLECTOR, #2 COLLECTOR, #3	STYLE 4: PIN 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13.	COLLECTOR, DYN COLLECTOR, #1 COLLECTOR, #2 COLLECTOR, #3 COLLECTOR, #3 COLLECTOR, #4 COLLECTOR, #4 BASE, #4 EMITTER, #4 BASE, #3 EMITTER, #3 BASE, #2		
14.	COLLECTOR		NO CONNECTION	14.		14.		SOLDERING	FOOTPRINT
15.	EMITTER		ANODE	15.		15.	BASE, #1	8	X
16.	COLLECTOR	16.	CATHODE	16.	COLLECTOR, #4	16.	EMITTER, #1		^ 40 <del></del>
					,		,		6X 1.12
STYLE 5:	DDAIN DVE #4	STYLE 6:	OATHODE	STYLE 7:	COURCE N OU			'	0.1.12
PIN 1.	DRAIN, DYE #1	PIN 1.		PIN 1.	SOURCE N-CH	Τ\		<u></u>	16
2.	DRAIN, #1	2. 3.	CATHODE CATHODE	2.	COMMON DRAIN (OUTPUT			↓ └──	10
3. 4.	DRAIN, #2 DRAIN, #2	3. 4.	CATHODE	3. 4.	COMMON DRAIN (OUTPU' GATE P-CH	1)		<u>*</u>	
4. 5.	DRAIN, #2 DRAIN, #3	4. 5.	CATHODE	4. 5.	COMMON DRAIN (OUTPU	Τ\			
5. 6.	DRAIN, #3	5. 6.	CATHODE	6.	COMMON DRAIN (OUTPU		1	.58 <b>∱</b>	
7.	DRAIN, #4	7.		7.	COMMON DRAIN (OUTPU		U.	.58	
8.	DRAIN, #4	8.	CATHODE	8.	SOURCE P-CH	.,			
9.	GATE, #4	9.	ANODE	9.	SOURCE P-CH				
10.	SOURCE, #4	10.	ANODE	10.	COMMON DRAIN (OUTPU	T)			
11.	,	11.		11.	COMMON DRAIN (OUTPU				
12.	SOURCE, #3	12.	ANODE	12.	COMMON DRAIN (OUTPU	T)			
13.	GATE, #2	13.	ANODE	13.	GATE N-CH				
14.	SOURCE, #2	14.	ANODE	14.	COMMON DRAIN (OUTPU	T)			—— ↓ PITCH
15.	GATE, #1	15.	ANODE	15.	COMMON DRAIN (OUTPU	T)			<u>+-+</u> -
16.	SOURCE, #1	16.	ANODE	16.	SOURCE N-CH				
								8	9 ++ 7
								,	DIMENSIONS: MILLIMETERS

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SOIC-16		PAGE 1 OF 1			

ON Semiconductor and at a trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## onsemi:

<u>MC14043BCPG MC14043BD MC14043BDG MC14043BDR2 MC14043BDR2G MC14043BFEL MC14044BDR2G MC14044BDR2G MC14044BDR2G MC14044BDR2G NLV14044BDR2G NLV14044BDR2G NLV14043BDR2G NLV14043BDR2G NLV14043BDR2G MC14044BDR2G NLV14043BDR2G NLV14044BDR2G NLV14043BDR2G NLV14044BDR2G NLV140</u>