




M3 bracket

P1

120 x 90 mm — paint lines



M3 bracket

P2

120 x 90 mm — paint lines


UPPER BOARD stands on this line (inner face at x = 7)



M3 bracket

P3

120 x 90 mm — paint lines

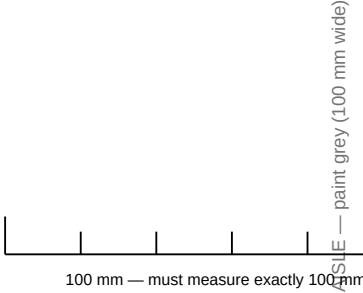

MALL / SCHOOL


building footprint 90 x 90

door faces the aisle (left)

CONTROLLER ZONE — Arduino / ESP32 + breadboard (position only, do not cut)


PARKME FYP — LOWER BOARD TEMPLATE (A3 420 x 297, scale 1:1)

PRINT AT 100% / ACTUAL SIZE (no fit-to-page), then verify the 100 mm ruler.



SOLID BLACK = cut/drill | SOLID BLUE = paint marking | GREY DASH = position only

Drills: M3 = 3.2 mm | wire pass = 8 mm | servo screws = 2.2 mm

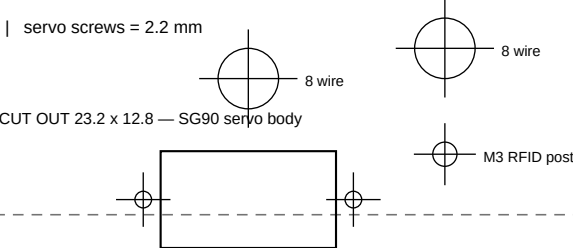

2 x 2.2 mm servo screws

arm sweeps across lane (103 mm)

ENTRY LANE — paint grey (100 mm wide)

car enters from right edge <<<

* MALL-SIDE END — measure all centres from THIS edge

PARKME FYP — UPPER BOARD (SENSOR PANEL) TEMPLATE

A3 stood on its short edge: 297 wide x 420 tall, scale 1:1. PRINT AT 100%, verify ruler.

Panel faces the parking slots. Centres at 60 / 155 / 250 mm from the mall-side edge

match slot centres P1 / P2 / P3 exactly.

SOLID BLACK = drill/cut | GREY DASH = module outline (position only)

Drills: ultrasonic eyes = 16.5 mm | wire pass = 8 mm | M3 = 3.2 mm

HC-SR04 corner screws (optional) = 1.8 mm at 41.7 x 16.7 spacing around each sensor centre.

