Manual

ONOENDI GPS Tracker

ONOENDI GPS Tracker

ONOENDI is the one of many sophisticated global positioning system device that can help anyone to trace their precious anytime. There are several method and command to make it as functional device. Trace over internet from official website www.yuganstudio.com or make some command via sms (short message text).

1. _____ Short **M**essage **T**ext _____

1.1 How to command

Format: #password,command=<value>

e.g. #12345,apn=internet

send command to device cellular number.

1.2 List of Command

No.	Format	Command For
1	#password,login	Send login request to server for the first
2	#password,apn=<value>	This command to set APN that needs for gprs connection. <value> is from mobile operator
3	#password,smspass=<value>	Allowed to set for new password, default password is **12345**
4	#password,power=<value>	Feature available for power cut off. <value> is only can be done with **on** or **off**
5	#password,int=<value>	Set interval for data upload, <value> in second. e.g. 5 means five seconds to upload data going to server
6	#password,pos	To get current position, altitude and longitude link will be sent as return command. Google maps format
7	#password,imei	Return IMEI as device IMEI number
8	#password,key	Get access key to use trace from the official
9	#password,ussd=<value>	USSD command available to get something like your current credits (pulsa), <value> without (*) and (#). e.g. ussd=888

2. _____ Website **A**ccess _____

2.1 Registration

To register you need IMEI number, you can check label on the device. Then open your internet browser and visit http://www.yuganstudio.com, before continue this step please ensure that you already retrieve your gps access key by sending command via sms. Insert your key click on "TRACE NOW" then start to register click on "here", see figure 1.1 and figure 1.2
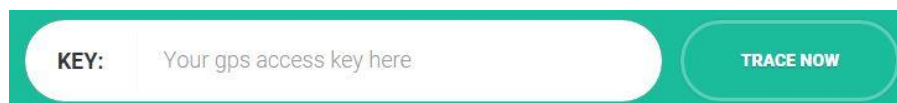

Figure 1.1 submit access key
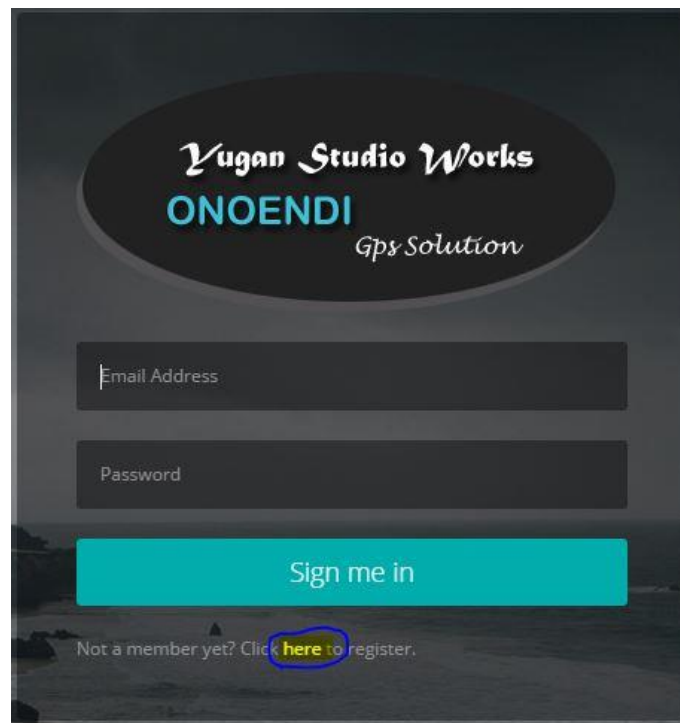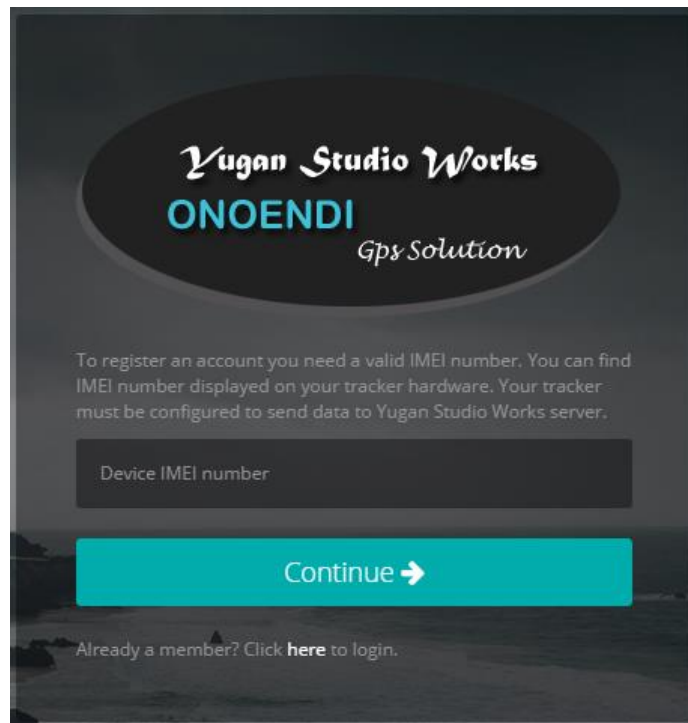
Figure 1.2 Registration

Insert your IMEI number then click "Continue". After fill up the registration form, click "Register", See figure 1.3

Figure 1.3 Insert Device IMEI number

Registration done and you will going to the tracking panel page.

2.2 Tracking Panel Environment