KDSS | Distributed Storage

TECHNICAL WHITEPAPER

KDSS Distributed Storage Technical Whitepaper

Erasure-coded distributed storage for petabyte-scale data: high storage efficiency for long-term retention, end-to-end verification and automatic repair for durability, and rolling upgrades with built-in alerting for simpler operations.

- **Low cost**
  90.6% storage efficiency with EC 29+3; sequential raw-disk writes
- **Highly reliable**
  Data stays readable and rebuildable with any 3 shards lost
- **Easy to operate**
  Non-disruptive rolling upgrades, built-in console and alerts



VERSION

26.11.1

NOVEMBER 2026

www.kdss.io
contact@kdss.io

Contents

1 Executive summary 3

2 Challenges of storing data at scale 4
- 2.1 The cost of redundancy 4
- 2.2 Failures become routine 4
- 2.3 Disk and file-system overhead 4
- 2.4 Operations and capacity management 4
- 2.5 Access methods 4

3 KDSS at a glance 6
- 3.1 Positioning 6
- 3.2 Key specifications 6
- 3.3 Design principles 7
- 3.4 Versioning and technology 7

4 System architecture 8
- 4.1 Components 8
- 4.2 Metadata 8
- 4.3 Write and read paths 9
- 4.4 Control-plane availability 9

5 Erasure coding and data layout 10
- 5.1 Profiles and storage efficiency 10
- 5.2 Cost compared with replication 10
- 5.3 Stripe layout 11
- 5.4 Placement constraints and audit 11

6 Raw-disk storage engine 12
- 6.1 Sequential append 12
- 6.2 Superblocks and disk identity 12
- 6.3 Local index and verification 12
- 6.4 Crash recovery 12
- 6.5 fsync policies 13
- 6.6 Hole reuse and compaction 13
- 6.7 Three levels of capacity protection 13

7 Reliability and self-healing 14
- 7.1 Four layers of disk-health monitoring 14
- 7.2 Local rebuild on storage nodes 14
- 7.3 In-place repair 15
- 7.4 Identity checks on the read path 15
- 7.5 Background CRC scrubbing 15
- 7.6 Recycle bin and two-phase GC 15
- 7.7 Balancing 15

8 Access interfaces 16
- 8.1 ksfs FUSE client 16
- 8.2 S3-compatible gateway 16
- 8.3 Choosing an interface 16

9 Operations and observability 17
- 9.1 Web management console 17
- 9.2 Writable capacity 17
- 9.3 Metrics and alerting 17
- 9.4 Non-disruptive rolling upgrades 18
- 9.5 High availability 18

10 Security 19
- 10.1 Deployment recommendations 19

11 Capacity planning and configuration 20
- 11.1 Sizing formula 20
- 11.2 Worked examples 20
- 11.3 Planning guidelines 20
- 11.4 Recommended hardware 20

12 Typical use cases 21

13 Contact us 22

1 Executive summary

KDSS is a distributed storage system built for petabyte-scale data. It protects data with Reed-Solomon erasure coding instead of replication, manages disks with a raw-disk engine instead of a local file system, and serves the same cluster through a POSIX mount (the ksfs FUSE client) and an S3-compatible API. A web console and an alerting system are built in.

90.6%	**3**	**≈16 PB**	**~190 PB**
Storage efficiency (EC 29+3)	Shards (disks or nodes) that can fail at once	Raw capacity per cluster (36 nodes × 36 disks)	Raw capacity in production

KDSS is designed around three goals:

- ✓ **Low cost.** Storage efficiency reaches up to 91.2% (31+3). The 29+3 profile, selected automatically for large clusters, delivers 90.6% — about 37% of the raw capacity that triple replication needs for the same usable capacity. The engine appends sequentially to the block device, which keeps head seeks low and helps extend HDD service life.
- ✓ **High reliability.** Shards of a stripe never share a node; with 29+3, data remains readable and rebuildable even when any 3 shards are lost at once. Every read is CRC32-verified, background scrubbing and placement audits run continuously, four layers of disk-health monitoring isolate failing disks automatically, and repair runs locally on the storage nodes.
- ✓ **Simple operations.** Upgrades roll through the cluster one node at a time without downtime. The web console shows cluster, node, disk and capacity views — including real-time “max writable now” and “conservative writable” figures. Built-in P0/P1/P2 alerts are pushed to Lark and email, and a full set of Prometheus metrics is exposed.

Proven in production

KDSS runs in multiple long-lived production clusters with close to 190 PB of raw capacity in total, more than 300 storage nodes and over 11,000 data disks, managing more than 700 million stripes. About 99% of production reads and writes go through the FUSE mount.

About this paper

This paper is written for architects, operations engineers and technical decision-makers evaluating or deploying KDSS. It covers the architecture, erasure coding and data layout, the storage engine, reliability mechanisms, access interfaces, operations and security, and closes with a capacity-planning method and recommended hardware. Everything described applies to version 26.11.1.

2 Challenges of storing data at scale

At petabyte scale, the question is no longer whether the data fits, but whether it can be kept for years — affordably, reliably, and with a team that can still manage it.

2.1 The cost of redundancy

Replication is the simplest form of redundancy, but triple replication yields only about 33% storage efficiency: every petabyte of data needs three petabytes of disk, along with the racks, power and operations that come with it. For data kept for many years, that overhead keeps compounding.

2.2 Failures become routine

With thousands of disks, failed disks, slow disks and offline nodes are everyday events. The system must tolerate several simultaneous disk or node failures and detect, isolate and repair them without human intervention. It must also guard against silent corruption that raises no error, and against misrouted reads that return someone else's data.

2.3 Disk and file-system overhead

Storing huge numbers of large files on a local file system adds metadata updates, random writes and fragmentation. On high-capacity HDDs, seek count drives both throughput and long-term disk health.

2.4 Operations and capacity management

Does an upgrade need downtime? How much can still be written? Which disk is about to fail, and who gets the alert? A small cluster can answer these by hand; at dozens of nodes and thousands of disks the system must answer them. Capacity is especially easy to misjudge: the sum of free space is not the capacity that can actually be written.

2.5 Access methods

Some applications work with files and need POSIX semantics; others are built for object storage and need an S3 API. Ideally, one system serves both.

Table 2-1 Challenges and how KDSS addresses them

Challenge	KDSS approach	See
High redundancy cost	Reed-Solomon erasure coding with 71.4%–91.2% efficiency, profile chosen by node count	Ch. 5
Concurrent disk / node failures	Shards placed on distinct nodes; 3-parity profiles survive any 3 lost shards	Ch. 5, 7
Silent corruption, misrouting	CRC32 on every read; stripe ID and shard index checked on the read path; background scrubbing	Ch. 6, 7
File-system overhead, disk wear	Raw-disk writes, sequential append, 4 KB alignment; hole re-use and compaction	Ch. 6
Manual failure handling	Four-layer health monitoring, automatic isolation and recovery, local rebuild, in-place repair	Ch. 7
Upgrade downtime, opaque capacity	Non-disruptive rolling upgrades; real-time max / conservative writable capacity	Ch. 9
File and object access	ksfs FUSE client for POSIX mounts; S3-compatible gateway	Ch. 8

3 KDSS at a glance

KDSS treats redundancy, on-disk layout, access and operations as one design: erasure coding sets cost and fault tolerance, the raw-disk engine sets disk efficiency and data verification, FUSE and S3 set how applications connect, and the console and alerts determine whether the system can be run reliably for years.

3.1 Positioning

KDSS is built for large, mostly large-file data that must be retained for a long time: sealed data for decentralized storage networks, cold archives, video and media assets, backup copies, and raw data for AI and analytics. It organizes data into 256 MB stripes and keeps metadata at stripe level only, so metadata stays small even at petabyte scale.

3.2 Key specifications

Table 3-1 Key specifications (version 26.11.1)

Item	Specification
Redundancy	Reed-Solomon erasure coding (klauspost/reedsolomon, SIMD-accelerated)
EC profiles	Automatic: 5+2, 9+2, 18+3, 29+3. Manual high-density: 19+3, 21+3, 22+3, 31+3, 31+2
Storage efficiency	71.4% (5+2), 90.6% (29+3), 91.2% (31+3)
Fault tolerance	3-parity profiles: any 3 shards (disks or nodes) can be lost at once
Stripe size	One 256 MB block = one stripe; about 8.8 MB per shard with 29+3
Cluster size	From 8 nodes (5+2); 36 nodes × 36 disks, about 16 PB raw, per cluster
Storage engine	Raw-disk, sequential append, 4 KB aligned; dual superblocks; BadgerDB local index
Data verification	CRC32 on every read, including streaming reads; background CRC scrub, 20 MB/s per node by default
Access	ksfs FUSE client (POSIX mount); S3-compatible gateway
Operations and HA	Rolling upgrades; replicated Masters with a MongoDB replica set; built-in alerts and Prometheus metrics

3.3 Design principles

Large stripes, little metadata

256 MB stripes; MongoDB stores stripe-level metadata only, so metadata grows slowly.

Data bypasses the Master

Clients encode locally and talk to storage nodes in parallel; the Master handles metadata, election and scheduling.

Failure is normal

Detection, isolation, repair and scrubbing are automatic; repair continues after the cluster stops accepting writes.

Conservative defaults

EC profiles are chosen conservatively from the node count; fsync defaults to every write.

3.4 Versioning and technology

KDSS uses calendar versioning (YY.MM.PATCH); this paper covers 26.11.1. Technology stack: Go, gRPC + Protocol Buffers, MongoDB, klauspost/reedsolomon, hanwen/go-fuse, BadgerDB, Gin, Vue 3 + Element Plus, Zap and the Prometheus client.

4 System architecture

KDSS has an access tier (ksfs, the S3 gateway and the web console), a control tier (the Master cluster and a MongoDB replica set) and a data tier (storage nodes). Data flows directly between clients and storage nodes; the Master handles only metadata and scheduling.

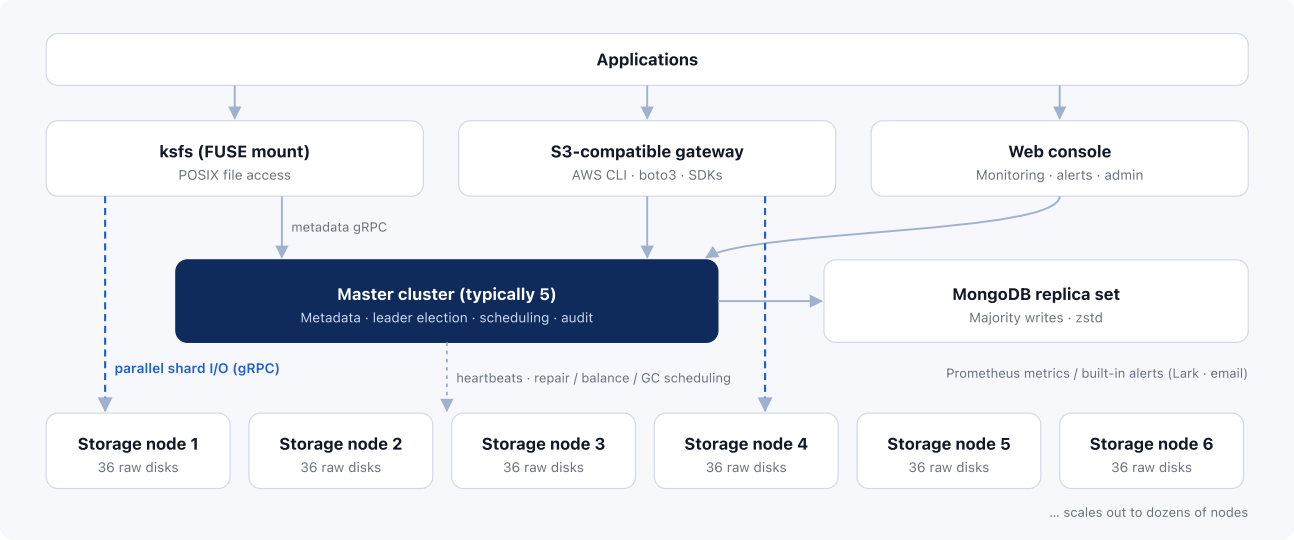


Figure 4-1 KDSS system architecture

4.1 Components

Table 4-1 Components and responsibilities

Component	Responsibilities	Ports
Master	Metadata, leader election; schedules repair, balancing, GC and placement audits	gRPC 6700, metrics 6701
Storage	Raw-disk I/O, local rebuild, disk-health monitoring	gRPC 6800, metrics 6801
MongoDB replica set	Collections such as inodes, dentries, stripes, nodes and buckets; zstd compression, majority writes	—
ksfs	FUSE client for POSIX mounts; client-side EC encoding and decoding	—
S3 gateway	S3-compatible API for object-storage applications	9000
Web console	Cluster management, monitoring, alerting, users and permissions	8081

4.2 Metadata

The file-system namespace (inodes, dentries), stripe locations (stripes), node information (nodes) and buckets (buckets) live in a MongoDB replica set with zstd compression and majority write concern. Because each stripe holds 256 MB, one petabyte of data maps to only about four million stripe records — metadata is several orders of magnitude smaller than the data it describes.

4.3 Write and read paths

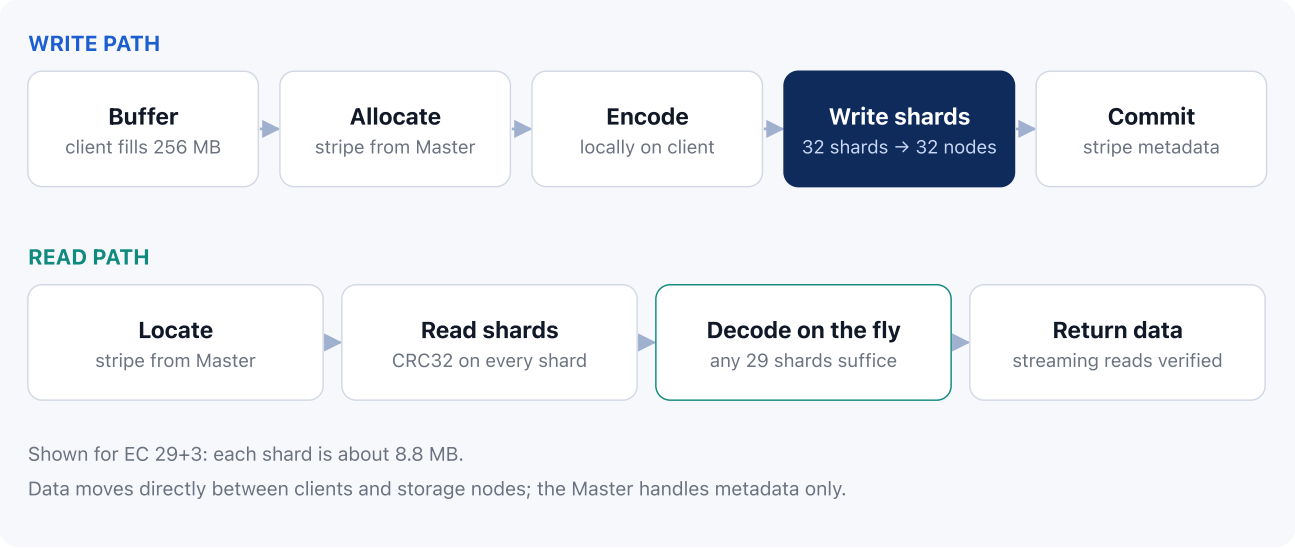


Figure 4-2 Write and read paths through FUSE (EC 29+3)

Write

1. **Buffer:** ksfs buffers incoming data on the client up to 256 MB.
2. **Allocate:** it asks the Master for a new stripe and its shard locations.
3. **Encode locally:** the client performs EC encoding — with 29+3, 29 data shards and 3 parity shards.
4. **Write in parallel:** all 32 shards are written in parallel to 32 different storage nodes.
5. **Commit:** once every shard is on disk, the stripe metadata is committed to the Master.

Read

1. **Locate:** the client gets the stripe's shard locations from the Master.
2. **Read in parallel:** shards are read from storage nodes in parallel, each verified with CRC32.
3. **Reconstruct on the fly:** if shards are missing, the remaining shards are decoded in real time.

4.4 Control-plane availability

The Master runs as several replicas (typically five) and elects a leader through the MongoDB replica set. Leader failover is automatic, and client write requests are redirected to the current leader.

5 Erasure coding and data layout

Erasure coding turns k data shards into m additional parity shards; any k of the k+m shards are enough to recover the original data. KDSS uses Reed-Solomon coding, implemented with klauspost/reedsolomon and SIMD acceleration.

5.1 Profiles and storage efficiency

KDSS picks a profile automatically from the number of nodes, erring on the side of safety. Higher-density profiles can be selected manually once fault-tolerance requirements are understood. Storage efficiency = k / (k+m).

Table 5-1 Erasure-coding profiles

Profile (k+m)	Efficiency	Shards that can be lost	Minimum nodes	Selection
5+2	71.4%	2	8	Auto Entry size
9+2	81.8%	2	12	Auto
18+3	85.7%	3	22	Auto
29+3	90.6%	3	33	Auto Recommended at scale
19+3 / 21+3	86.4% / 87.5%	3	—	Manual High density
22+3	88.0%	3	26	Manual High density
31+3	91.2%	3	—	Manual High density
31+2	93.9%	2	—	Manual Lower tolerance; use with care

Note: efficiency for 19+3, 21+3 and 31+2 is computed as k/(k+m). Each minimum node count equals the stripe width k+m plus one.

5.2 Cost compared with replication

For the same usable capacity, 29+3 needs about 37% of the raw capacity of triple replication — while raising fault tolerance from 2 to 3.

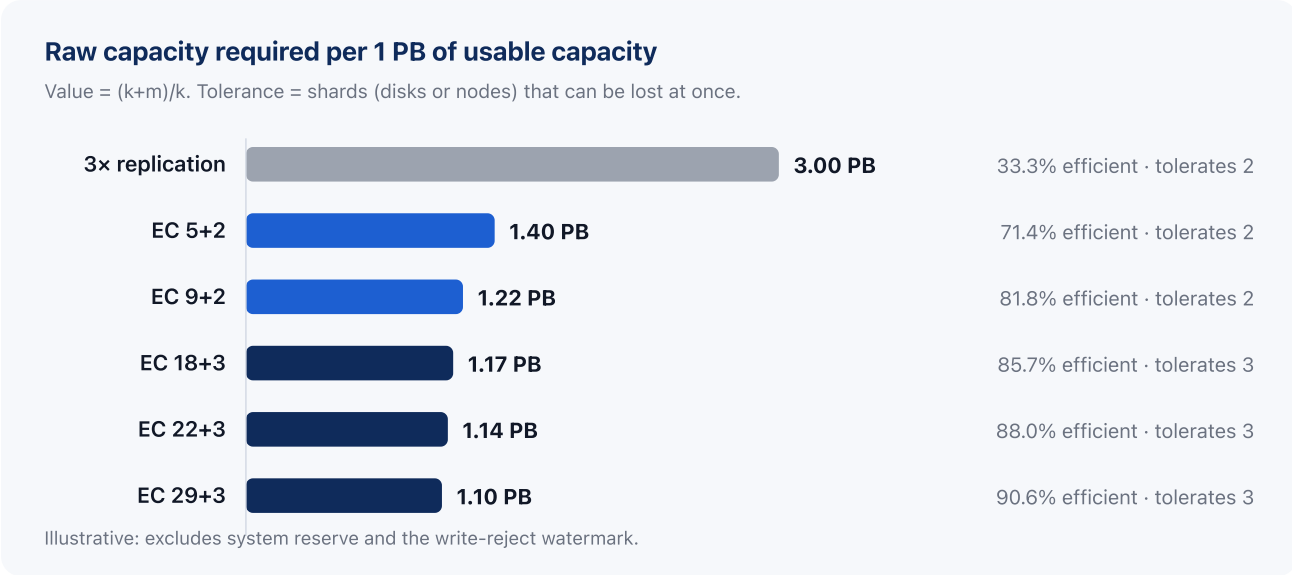


Figure 5-1 Raw capacity required by replication and EC profiles (illustrative)

5.3 Stripe layout

Each 256 MB block forms one stripe. With 29+3, the block is split into 29 data shards of about 8.8 MB, 3 parity shards are computed, and all 32 shards are written to 32 different nodes. Large stripes keep every disk I/O large and let metadata stay at stripe level.

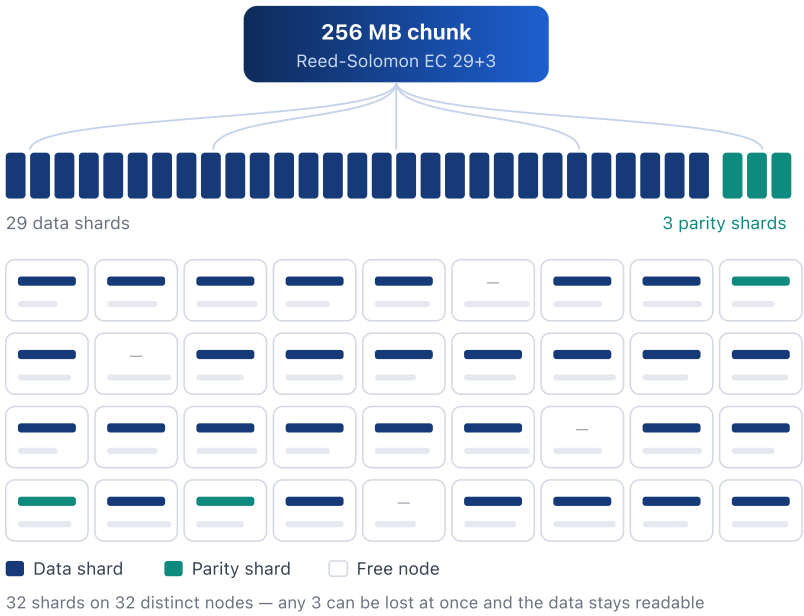


Figure 5-2 Placement of an EC 29+3 stripe across nodes

5.4 Placement constraints and audit

Fault tolerance only holds if no two shards of a stripe share a node — otherwise one node failure could take out several shards. KDSS enforces this as a hard rule:

- ✓ **Enforced on three paths.** Writes, repairs and balancing — every path that creates shards — check the constraint when choosing target nodes.
- ✓ **Continuous placement audit.** The Master continuously audits the placement of every stripe in the background, independently verifying the three checks above.

6 Raw-disk storage engine

Storage nodes read and write block devices directly, bypassing the local file system. Shards are appended sequentially, located through a local index, and verified on every read.

6.1 Sequential append

Shards are 4 KB aligned and appended at the write frontier. Compared with keeping many files on a file system, this avoids random file-system metadata updates and reduces head seeks: throughput is steadier, HDDs last longer and fail less often.

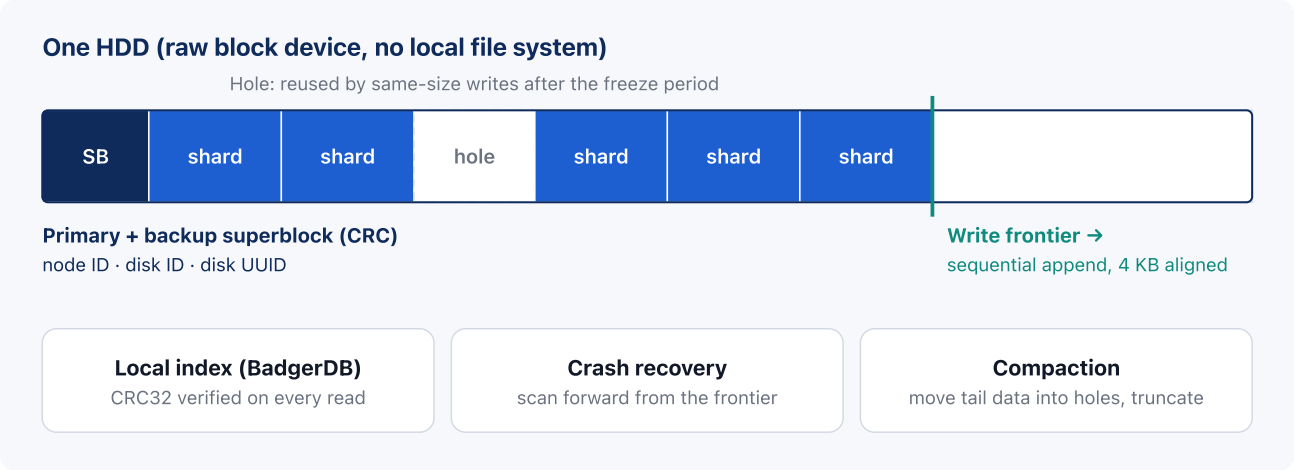


Figure 6-1 Raw-disk layout (illustrative, not to scale)

6.2 Superblocks and disk identity

Each disk carries a primary and a backup superblock, both CRC-protected. The superblock records the disk's identity — node ID, disk ID and disk UUID. At startup the storage node uses it to identify every disk: if a disk has moved to another slot or its device name has changed, this is detected and corrected automatically; if a disk that does not belong to the node is attached, the node refuses to start rather than write data to the wrong disk.

6.3 Local index and verification

Shard locations on disk are tracked in a local BadgerDB index. Every read is CRC32-verified, streaming reads included. If shards are missing at read time, the client reconstructs the data from the remaining shards in real time.

6.4 Crash recovery

Table 6-1 Startup and recovery behavior

Situation	Behavior
Clean shutdown	Starts in seconds
Power loss	Scans forward from the write frontier to restore index entries written before the outage
Interrupted compaction	The local index can be rebuilt from the whole disk
Many disks per node	All disks are opened in parallel

6.5 fsync policies

Table 6-2 fsync policies

Policy	Description
immediate (default)	Every write is flushed to disk before it is acknowledged
batch	Group commit: several writes share one flush
deferred	For hardware that guarantees power-loss safety, such as RAID controllers with a BBU

6.6 Hole reuse and compaction

Deletes are soft. Data first goes to the recycle bin; only after a configurable freeze period does its space become a reusable hole. New shards can be written straight into a hole of exactly the same size — holes are never split, so no fragments are created.

Compaction moves data from the end of the disk into holes and then truncates the freed tail. The process is crash-safe, every moved shard is read back and verified, and metadata is not changed at all — the layers above never notice.

6.7 Three levels of capacity protection

As disks fill up, writes are restricted in three steps, so that repair always has room and existing data is never put at risk:

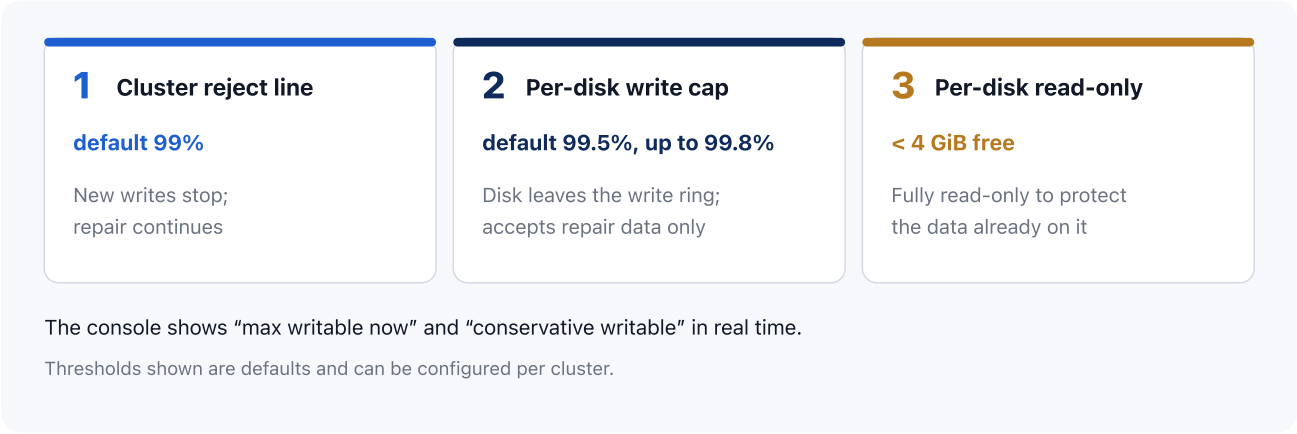


Figure 6-2 Capacity protection levels (default thresholds)

7 Reliability and self-healing

KDSS breaks reliability into three jobs: find problems early, stop them from spreading, and restore redundancy quickly. Every step runs automatically by default.

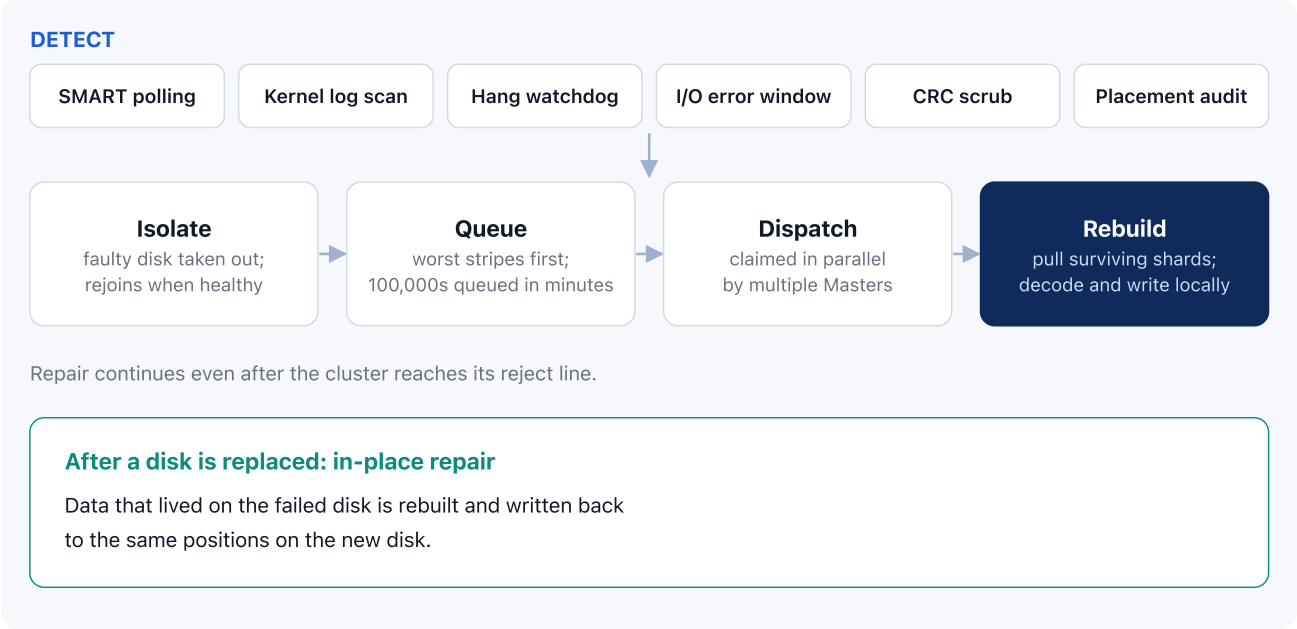


Figure 7-1 Self-healing, from detection to repair

7.1 Four layers of disk-health monitoring

Table 7-1 Disk-health monitoring

Layer	Purpose
Periodic SMART collection	Reads SMART data on a schedule to track long-term health trends
Fast kernel-log scan	Catches disk errors reported by the kernel quickly; debounced to avoid acting on one-off messages
I/O hang watchdog	Declares a hang when a read has not returned in 120 s or a write in 300 s
Sliding I/O-error window	Counts I/O errors over a time window; isolates the disk above the threshold and restores it automatically once healthy

7.2 Local rebuild on storage nodes

When shards are missing, the storage node rebuilds them itself: it fetches the surviving shards of the stripe, decodes locally and writes the result straight to disk, cutting out extra network hops. Repair work is organized as follows:

- **Worst first.** Stripes are ordered by the number of missing shards, so those closest to data loss are repaired first.
- **Bulk queuing.** Repair tasks are created in batches — hundreds of thousands of stripes can be queued within minutes.
- **Distributed dispatch.** Multiple Masters claim repair tasks in parallel.
- **Repair when full.** When the cluster reaches its reject line, new writes stop but repair continues.

7.3 In-place repair

After a failed disk is replaced, KDSS can rebuild the data it held and write it back to the same positions on the new disk.

7.4 Identity checks on the read path

Every read carries the stripe ID and shard index and is checked against them, so a misrouted request can never return another stripe's data. This complements CRC: CRC proves the data is intact, the identity check proves it is the right data.

7.5 Background CRC scrubbing

A background scrubber periodically reads and verifies shards on disk, finding silent corruption in data that has not been accessed for a long time. Scrubbing is rate-limited (20 MB/s per node by default) and its period is configurable, so it does not interfere with production I/O.

7.6 Recycle bin and two-phase GC

Accidentally deleted data can be restored from the recycle bin. Garbage collection runs in two phases with a configurable retention window. A read-only orphan-shard reconciliation tool compares shards on disk with metadata without modifying anything.

7.7 Balancing

- ✓ **Cross-node balancing (explicitly triggered).** Source nodes are chosen by deviation from the mean, and targets are the emptiest nodes in each stripe's free-node set. Moves are double-checked for duplicates and metadata is updated with versioned compare-and-swap, preventing conflicts and repeated moves. Balancing is also subject to the placement checks.
- ✓ **Intra-node balancing.** Evens out usage across the disks within a node.

8 Access interfaces

KDSS offers two ways in: the ksfs FUSE client for POSIX file access, and an S3-compatible gateway for object-storage applications. About 99% of production reads and writes go through FUSE.

8.1 ksfs FUSE client

- ✓ Mounts as a POSIX file system — existing applications read and write without changes.
- ✓ `df -h` reports the cluster's real capacity.
- ✓ fsync is honored for durability.
- ✓ Read/write buffering, concurrency and rate limits are tunable.
- ✓ EC encoding runs on the client, and EC verification can run in parallel with writes.

8.2 S3-compatible gateway

The S3 gateway supports the APIs below (verified against the code). Large objects are streamed: up to 64 MB is buffered, anything larger is streamed in segments, keeping memory use bounded. Standard tools such as the AWS CLI, s3cmd, boto3 and the Go SDK work directly.

Table 8-1 Supported S3 APIs

Category	APIs
Bucket	ListBuckets, CreateBucket, DeleteBucket, HeadBucket, ListObjects
Object	PutObject, GetObject (incl. Range), HeadObject, DeleteObject, CopyObject
Multipart upload	CreateMultipartUpload, UploadPart, CompleteMultipartUpload, AbortMultipartUpload, ListParts, ListMultipartUploads

AWS CLI

```
# Access keys are created in the web console; <gateway> is the S3 gateway address
aws --endpoint-url http://<gateway>:9000 s3 mb s3://archive
aws --endpoint-url http://<gateway>:9000 s3 cp ./dataset.tar s3://archive/2026/dataset.tar
aws --endpoint-url http://<gateway>:9000 s3 ls s3://archive/2026/
```

Python (boto3)

```
import boto3

s3 = boto3.client("s3", endpoint_url="http://<gateway>:9000",
                  aws_access_key_id="<ACCESS_KEY>", aws_secret_access_key="<SECRET_KEY>")
s3.upload_file("dataset.tar", "archive", "2026/dataset.tar")   # large files use multipart
upload automatically
obj = s3.get_object(Bucket="archive", Key="2026/dataset.tar", Range="bytes=0-1048575")
```

8.3 Choosing an interface

Use FUSE (ksfs) for applications that work with file paths, need POSIX semantics and fsync, or write and read large files sequentially in bulk. Use the S3 gateway for applications built on object storage, uploads and downloads across networks, and backup or archive workflows that already rely on S3 tooling.

9 Operations and observability

The tools needed to run KDSS are built in: a management console, a capacity panel, metrics and alerting, and a rolling-upgrade procedure that avoids downtime.

9.1 Web management console

The console, built with Vue 3 and Element Plus, provides:

Cluster views
Status and usage of clusters, nodes and disks

Capacity panel
Max writable now, conservative writable, recycle bin

Data management
Buckets, access keys, file browser

Alerts
Alert rules, notification channels, alert history

Audit
Audit log of operations

Users
Multiple users with role-based permissions

9.2 Writable capacity

In an erasure-coded cluster, total free space is not the same as what can still be written: a 29+3 stripe needs space on 32 different nodes at once, so as some disks fill up or leave the write ring, real writable capacity drops below free space. The console therefore reports two figures directly — **max writable now** and **conservative writable** — as the basis for expansion and scheduling decisions, and raises an alert when too few nodes can accept writes.

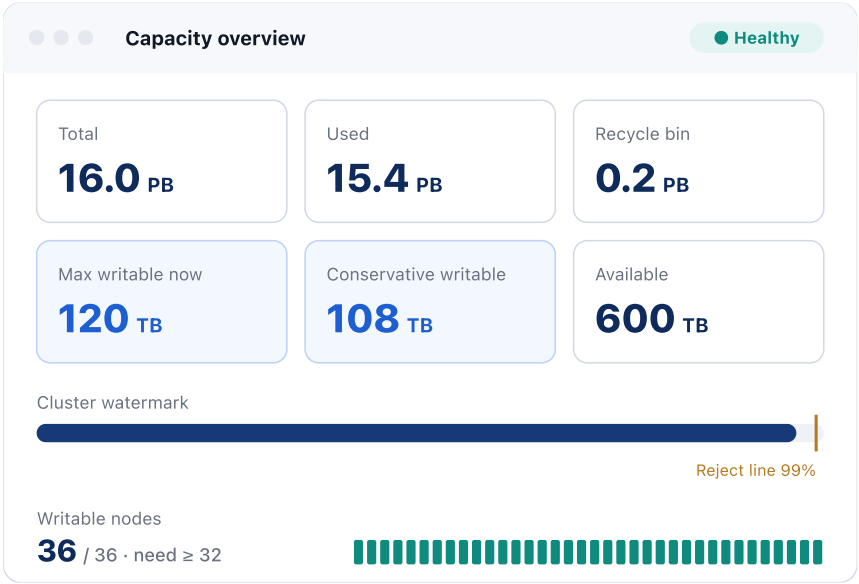


Figure 9-1 Console capacity panel (illustrative)

9.3 Metrics and alerting

- **Prometheus metrics:** a complete set under the `kdss_*` namespace; `/metrics` supports Bearer-token authentication; 62 alert-rule templates ship with each release.
- **Built-in alerting:** P0 / P1 / P2 severities, debouncing and reminder intervals, delivery to Lark and email, and alert history.

- ✓ **Built-in rules:** cover too few writable nodes, capacity, disk failures, MongoDB liveness, license-check failures and more.

9.4 Non-disruptive rolling upgrades

Upgrades proceed one node at a time. Each node goes through:

1. **Cordon:** the node enters maintenance mode and stops accepting new writes.
2. **Drain:** wait until in-flight writes reach zero.
3. **Replace:** install the new binaries and restart.
4. **Verify:** confirm the node is healthy.
5. **Uncordon:** the node accepts writes again; move on to the next one.

> **Constraint:** the number of nodes offline at the same time never exceeds the number of parity shards minus one. A 29+3 cluster, for example, takes at most 2 nodes offline at once, keeping redundancy in reserve during the upgrade.

9.5 High availability

The Master runs as several replicas (typically five) and elects a leader together with the MongoDB replica set (majority writes). Failover is automatic, and client writes are redirected to the leader. Storage-node failures are covered by erasure-coded redundancy and trigger automatic repair.

10 Security

KDSS is deployed on internal networks by default. Its security controls cover identity and permissions on the management plane, access to the metrics endpoint, encryption between components, and license verification.

Table 10-1 Security controls

Area	Control
Role-based access (RBAC)	Multiple users with three roles: admin, storage_admin and readonly
Authentication	JWT sessions; passwords stored with bcrypt; login rate limiting and CAPTCHA
Web protection	CSRF protection
Audit	Audit log of console operations
S3 access	Buckets and access keys created and managed in the console
Metrics endpoint	`/metrics` supports Bearer-token authentication
Inter-component traffic	Optional gRPC mTLS; can be left off for internal-only deployments
License	Online verification; failures raise a built-in alert

10.1 Deployment recommendations

- ✓ Place Masters, storage nodes and MongoDB on an isolated internal network; enable gRPC mTLS whenever traffic crosses an untrusted network.
- ✓ Assign roles by least privilege: readonly for day-to-day viewing, storage_admin for storage operations, and admin only for user and system administration.
- ✓ Configure a Bearer token for `/metrics` so that only your monitoring system can scrape it.

11 Capacity planning and configuration

Capacity planning starts from three questions: how much usable capacity is needed, how many simultaneous shard failures must be tolerated, and how many nodes are available. The node count determines which EC profiles are possible; the profile determines storage efficiency.

11.1 Sizing formula

Usable capacity ≈ nodes × disks per node × disk size × k/(k+m) × reject-line watermark

The reject line defaults to 99%; the per-disk write cap defaults to 99.5%. Actual writable capacity is the "conservative writable" figure in the console.

11.2 Worked examples

Table 11-1 Sizing examples (illustrative; 16 TB disks, decimal TB)

Configuration	Raw	Profile	× efficiency	× 99% watermark	Tolerance
8 nodes × 36 disks	4,608 TB	5+2	3,291 TB	≈ 3.3 PB	2
12 nodes × 36 disks	6,912 TB	9+2	5,655 TB	≈ 5.6 PB	2
22 nodes × 36 disks	12,672 TB	18+3	10,862 TB	≈ 10.8 PB	3
33 nodes × 36 disks	19,008 TB	29+3	17,226 TB	≈ 17.1 PB	3

Note: efficiency uses the exact k/(k+m). System disks, reserved space and the difference between nominal and usable disk capacity are not included.

11.3 Planning guidelines

- **One node more than the stripe width.** The minimum node count for each profile is k+m+1 — at least 33 nodes for 29+3.
- **Choose the profile by fault tolerance.** To survive 3 simultaneous shard failures, use 18+3 or higher. Use 31+2 only where reduced tolerance is an explicit, accepted trade-off.
- **Leave room for maintenance.** During rolling upgrades, no more than m – 1 nodes may be offline at once.
- **Watch writable nodes.** Writing a stripe needs k+m nodes that can accept writes. As nodes fill up, expand before the "too few writable nodes" alert fires.

11.4 Recommended hardware

Table 11-2 Recommended hardware (from production experience)

Role	Configuration
Storage node	36 × 16 TB enterprise HDDs (JBOD pass-through); 20-core-class Xeon CPU; 64 GB RAM; 2 × 10 GbE bonded (20 Gbps); RAID1 system disks
Master	Can be co-located with storage on nodes with RAID1 system disks; typically 5
MongoDB	Replica set on SSDs
Minimum size	8 nodes (5+2)

12 Typical use cases

KDSS fits large, mostly large-file data that is written once and kept for a long time. Typical scenarios include:

	CHALLENGE	APPROACH	OUTCOME
Decentralized storage e.g. Filecoin	Sealed data is large and long-lived; storage cost directly drives returns, and lost data means lost revenue.	Sealed output lands sequentially through the FUSE mount, stored with high-density EC; automatic repair and scrubbing keep it available.	Over 90% storage efficiency; no data loss from concurrent disk failures; existing programs use the POSIX mount as is.
Cold-data archive Archive	Data may go unread for years but must not be lost; silent corruption found only at read time is found too late.	Erasure coding lowers long-term cost; background CRC scrubbing finds and repairs corruption proactively; the recycle bin guards against mistakes.	Low retention cost and continuously verifiable data integrity.
Video and media Media	Large assets and fast growth; high sequential throughput plus random-access reads.	256 MB stripes read and written in parallel; S3 GetObject with Range reads; scale out by adding nodes.	Steady large-file throughput; file and object access to the same cluster.
Backup and disaster recovery Backup	Backup copies consume large amounts of capacity, and the backup target itself must be reliable and easy to manage.	Existing backup tools connect over S3 with multipart upload for large objects; alerts go to Lark and email.	Backups stored with erasure coding instead of replicas; S3 tooling works without changes.
Raw data lakes for AI and analytics Data lake	Raw datasets keep growing, read both by file-based training jobs and by object-based pipelines.	Compute nodes read through the FUSE mount; pipelines write and distribute through S3.	One storage system for both access patterns; capacity scales with nodes.

13 Contact us

To discuss deployment, capacity planning or technical details of KDSS, please get in touch.

Sales and partnerships
Product inquiries, solution assessment, partnerships

contact@kdss.io

Technical support
Deployment, usage and troubleshooting

support@kdss.io

Website: www.kdss.io

Features and parameters described in this document apply to KDSS version 26.11.1. Figures and examples marked “illustrative” explain principles and do not represent measured results of a specific deployment. Product features may change between releases; the released version is authoritative.

Third-party names and trademarks mentioned herein belong to their respective owners.

© 2026 KDSS. All rights reserved.