Leaving the Cyclic Orbit:
Local Search, Exact Search and a Cubic Law for Balanced Latin Rectangles

Zhengyu Li* Vijay Ganesh†

Abstract

Write a $k \times n$ Latin rectangle as n points in the grid $[n]^k$, one point per symbol, whose coordinates are the columns the symbol occupies. The rectangle is *balanced* when these points are pairwise equidistant in the ℓ_1 metric, and its *imbalance* measures how far it is from that ideal. We study the minimum imbalance from three sides. *Constructively*, a simulated annealing that moves symbols within rows and only penalises column clashes improves 33 of the 51 best known values for $8 \le n \le 13$, by up to 39.4%, and matches the rest. We explain why earlier column-based local search could not find these rectangles. Every column operation preserves a permutation group attached to the rectangle, its *row group*. For cyclic rectangles this group has order at most n, while 32 of our 33 new rectangles have row group A_n or S_n. *Exactly*, a short branch and bound proves that the minimum imbalance of a 3×9 rectangle is 56, a value found by Díaz et al. whose optimality was open, and independently confirms the known optima for 3×8 and 4×8. *Asymptotically*, a pigeonhole argument in $[n]^k$ shows that for every fixed k the minimum imbalance grows like n^3. For $k = 2$ the limit of $\min I/n^3$ exists, is attained by a permuton, and lies between $4/375$ and about 0.120. Along the way we observe that perfect balance is an ℓ_1-equilateral problem, so it forces $k = \Omega(n/\log n)$ rows. For $2 \times n$ rectangles, single two-minute annealing runs improve five of the seven six-hour MIP upper bounds for $14 \le n \le 20$.

1 Introduction

In an agricultural field trial, treatments are laid out on a grid of plots. When some pairs of treatments are systematically planted closer together than others, spatial correlation in the soil can bias their comparison [14]. Latin designs remove the row and column effects, but not this one. *Spatially balanced* Latin squares ask, in addition, that every pair of treatments be equally far apart on average [5, 9]. Díaz et al. [2] posed the same question for $k \times n$ rectangles, observed that perfect balance is then usually impossible, and asked instead for rectangles of minimum *imbalance*. Since then the problem has driven work on SAT encodings that prove optima with checkable proof certificates [11], mixed-integer programming [10], streamliners written by large language models [16] and LLM agents that reformulate models [15], and balanced Latin squares have served as a test case for agentic neurosymbolic discovery [17]. The reference table of Voboril et al. [16], which collects the best values obtained by all of these approaches, is the starting point of this paper.

Here is the point of view of this paper. Record, for each symbol u, the columns $c_1(u), \dots, c_k(u)$ that it occupies in the k rows. This gives a point $x_u \in [n]^k$, and the

*Georgia Institute of Technology. brian.li@gatech.edu
†Georgia Institute of Technology. vganesh45@gatech.edu

distance between two symbols used throughout the literature is exactly the ℓ_1 distance $\|x_u - x_v\|_1$. A balanced rectangle is therefore a set of n points in a k-dimensional grid that are pairwise *equidistant* in the taxicab metric. The picture organises the whole paper. When k is small compared with n, the grid is too crowded for equidistance, and Section 7 makes this quantitative. When $k = n$ there is room, consistent with the existence of balanced squares for infinitely many n. And it suggests a search that moves individual points, rather than one that rearranges a rigid algebraic pattern.

Contributions.

1. **A relaxed local search** (Section 3). Rows are kept as permutations, the column condition becomes a penalty with an adaptive weight, and a move swaps two symbols within a row. A move is evaluated exactly in $O(n)$ time. Against the reference table of Voboril et al. [16], the search improves 33 of 51 instances and matches the other 18 (Section 4).
2. **The row group** (Section 5). We attach to each rectangle the permutation group generated by the ratios of its rows. Column operations leave this group unchanged, so local search that permutes columns of a cyclic rectangle [2, 12] stays among rectangles whose row group has order at most n. For 32 of our 33 improved rectangles the row group is the full alternating or symmetric group.
3. **A new optimum** (Section 6). A branch and bound that places one symbol at a time proves that the known value 56 is optimal for 3×9, which was open, and independently reproduces the known optima for $2 \times n$ with $n \le 11$ and for 3×8 and 4×8.
4. **A cubic law** (Section 7). For every fixed k, the minimum imbalance is $\Theta(n^3)$, with the explicit lower constant $c_k = \max_m k\, m^{-k}(\frac{1}{3} - \frac{1}{m})$. Perfect balance also requires $n \le e(\ell_1^k) = O(k \log k)$, by a classical bound on equilateral sets.
5. **The case** $k = 2$ (Section 8). On the open instances $14 \le n \le 20$, a single-seed two-minute annealing run improves the six-hour upper bounds of Mirka et al. [10] for $15 \le n \le 19$, ties at $n = 14$ and is worse at $n = 20$. Near-optimal $2 \times n$ rectangles look like a few broken diagonals, and the normalised imbalance appears to stay near $0.11\, n^3$ up to $n = 64$, which suggests a limit of about 0.12. The limit exists and is the minimum of a continuous functional on permutons.

None of the algorithmic ingredients is new by itself. Simulated annealing [7], row-preserving swaps with temporarily violated column constraints [18, 19] and adaptive penalties (strategic oscillation [4]) are all established. What we add is their combination for this objective and the row-group explanation of why it reaches rectangles that earlier local search could not.

2 Preliminaries

A $k \times n$ *Latin rectangle* ($k \le n$) is an array with entries in $[n] = \{1, \dots, n\}$ in which no symbol repeats in a row or in a column. Let $c_i(u)$ denote the column of symbol u in row i and $x_u = (c_1(u), \dots, c_k(u)) \in [n]^k$. Following Díaz et al. [2] and Peruvemba Ramaswamy and Szeider [11],

$$d(u,v) = \sum_{i=1}^{k} |c_i(u) - c_i(v)| = \|x_u - x_v\|_1, \qquad I(L) = \sum_{1 \le u < v \le n} |d(u,v) - t|, \qquad t = \frac{k(n+1)}{3}.$$

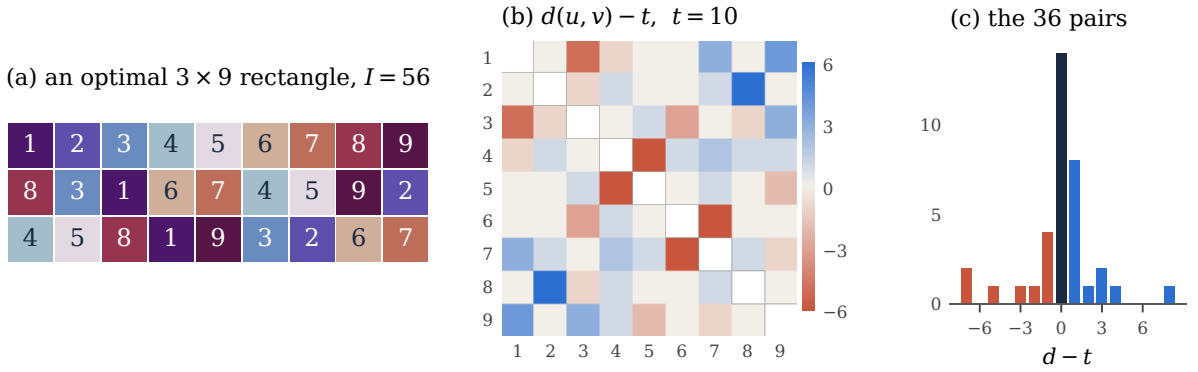


Figure 1. A 3×9 rectangle of imbalance 56, which Theorem 4 proves optimal. (a) The rectangle, one colour per symbol. (b) The deviation $d(u, v) - t$ of every pair from the average distance $t = 10$. Blue pairs are too far apart and red pairs too close. (c) Histogram of the 36 deviations. They sum to zero, and $I = \sum |d - t| = 56$.

Each row contributes $\sum_{u<v} |c_i(u) - c_i(v)| = \binom{n+1}{3}$ to the total distance, so t is the *average* distance over all $\binom{n}{2}$ pairs. In particular the deviations $d(u, v) - t$ sum to zero, and

$$I(L) = 2 \sum_{u<v} (t - d(u, v))^+. \tag{1}$$

Imbalance is therefore caused by the pairs that are too close. This one-line identity is the engine of Section 7. The quantity $3I$ is an integer, and as in the literature we write imbalances as $x.0$, $x.3$ and $x.6$ for x, $x + \frac{1}{3}$ and $x + \frac{2}{3}$.

Two dictionaries. A rectangle can be read through its rows or through its points. Through its rows it is a k-tuple $(r_1, \ldots, r_k)$ of bijections $r_i \colon [n] \to [n]$ from columns to symbols, with $r_i(j) \neq r_{i'}(j)$ for $i \neq i'$. Through its points it is a set $\{x_u\}$ in $[n]^k$ whose coordinate projections are bijections and in which every point has distinct coordinates. The column condition says exactly that. The imbalance is invariant under relabelling symbols and permuting rows, but not under permuting columns. Relabelling symbols, we may assume $r_1 = \mathrm{id}$.

3 Search: rows as permutations, columns as a penalty

The state of the search is a k-tuple of permutations with $r_1 = \mathrm{id}$. It need not be Latin. A *move* picks a row $i \geq 2$ and two columns $j_1 \neq j_2$, and swaps the symbols $a = r_i(j_1)$ and $b = r_i(j_2)$. In the point picture, the move exchanges the i-th coordinates of the two points x_a and x_b, and nothing else moves.

Lemma 1 (Incremental evaluation)**.** *After the move, only the $2(n-2)$ distances $d(a, w)$ and $d(b, w)$ with $w \notin \{a, b\}$ change, and with $p = c_i(w)$,*

$$d'(a, w) = d(a, w) - |j_1 - p| + |j_2 - p|, \qquad d'(b, w) = d(b, w) - |j_2 - p| + |j_1 - p|.$$

Hence the exact change of $3I$ is computable in $O(n)$ integer operations.

Proof. Only the i-th coordinates of x_a and x_b change, and they are exchanged, so $d(a, b)$ is unchanged and every other pair not containing a or b is untouched. □

$n\backslash k$	2	3	4	5	6	7	8	9	10	11	12
8	40.0	36.0	32.0	30.0	24.0	28.0					
9	65.3	56.0	**53.3** ~~56.0~~	**48.6** ~~52.6~~	**40.0** ~~48.0~~	**43.3** ~~51.3~~	**42.6** ~~53.3~~				
10	92.0	80.0	78.6	66.6	**60.0** ~~70.0~~	**58.0** ~~72.0~~	**58.6** ~~82.6~~	**64.0** ~~70.0~~			
11	124.0	114.0	**104.0** ~~112.0~~	**94.0** ~~116.0~~	**88.0** ~~108.0~~	**84.0** ~~118.0~~	**78.0** ~~114.0~~	**84.0** ~~120.0~~	**100.0** ~~110.0~~		
12	168.0	**152.0** ~~154.0~~	**149.3** ~~154.6~~	**140.0** ~~145.3~~	120.0	**121.3** ~~164.0~~	**116.6** ~~148.0~~	**106.0** ~~154.0~~	**124.0** ~~174.6~~	**136.6** ~~147.3~~	
13	218.6	198.0	**201.3** ~~211.3~~	**191.3** ~~210.6~~	**166.0** ~~204.0~~	**164.0** ~~203.3~~	**160.0** ~~220.6~~	**152.0** ~~214.0~~	**154.6** ~~240.6~~	**168.0** ~~224.0~~	**166.0** ~~274.0~~

Table 1. Minimum known imbalance of $k \times n$ Latin rectangles. Bold: new value from this work, with the previous best value struck through below it. Previous values are those collected in Table 1 of Voboril et al. [16], which includes results of [2, 11] and of LLM-generated streamliners. Plain: a record that our search matches.

Penalty. Let V be the number of excess occurrences of symbols in columns. It is maintained in $O(1)$ per move with per-column counters. The search minimises $3I + W \cdot V$ and records only states with $V = 0$. Every 2^{16} proposals the weight W is multiplied by 1.02 if the current state has conflicts and by 0.99 otherwise, and it is kept in $[1, 4n^2]$, starting from $W = k$. The search can therefore leave the Latin rectangles, pass through non-Latin states and come back. Moves that permute whole columns never leave the Latin rectangles, and as Section 5 shows, they never change the row group.

Schedule. The search starts from the cyclic rectangle $r_i(j) = i + j \bmod n$. It accepts a move of change Δ with probability $\min(1, e^{-\Delta/T})$. The temperature starts at $T_0 = 2k$ (in units of $3I$), is multiplied by 0.9999995 per proposal and never drops below 0.05, which it reaches after about 10^7 proposals. Most of a run is therefore a low-temperature walk on plateaus, punctuated by reheats. The search reheats after $4 \cdot 10^7$ proposals without improvement. Runs are single-threaded, and the reported rectangle is re-evaluated from scratch. An independent checker, written from the definition with exact rational arithmetic, verifies every reported rectangle and reproduces all fourteen rectangles printed in [11, 16].

4 Improved upper bounds

We take the 51 non-square instances $8 \le n \le 13$, $2 \le k \le n - 1$ of Table 1 of [16], which also collects the earlier records. All runs used an Apple M3 laptop, one core per run. Each instance received independent runs of 1 and 5 CPU minutes, and the larger instances ($k \ge 4$, $n \ge 9$) also a 10-minute run, for a total of at most 16 CPU minutes per instance. Table 1 shows the outcome. The search improves 33 values, matches 18 and is worse on none. The mean improvement is 18.5% and the largest is 39.4% (12×13: $274.0 \to 166.0$). The search matches every record with $n = 8$ or $k = 2$, every record with $k = 3$ except 3×12, and the records for 4×10, 5×10 and 6×12. Several of these are proven optimal [10, 11].

Speed. We reran the search with 5 fresh seeds on every improved instance, stopping when it beat the record (Figure 2b). All 165 runs succeeded. The median time to beat the previous

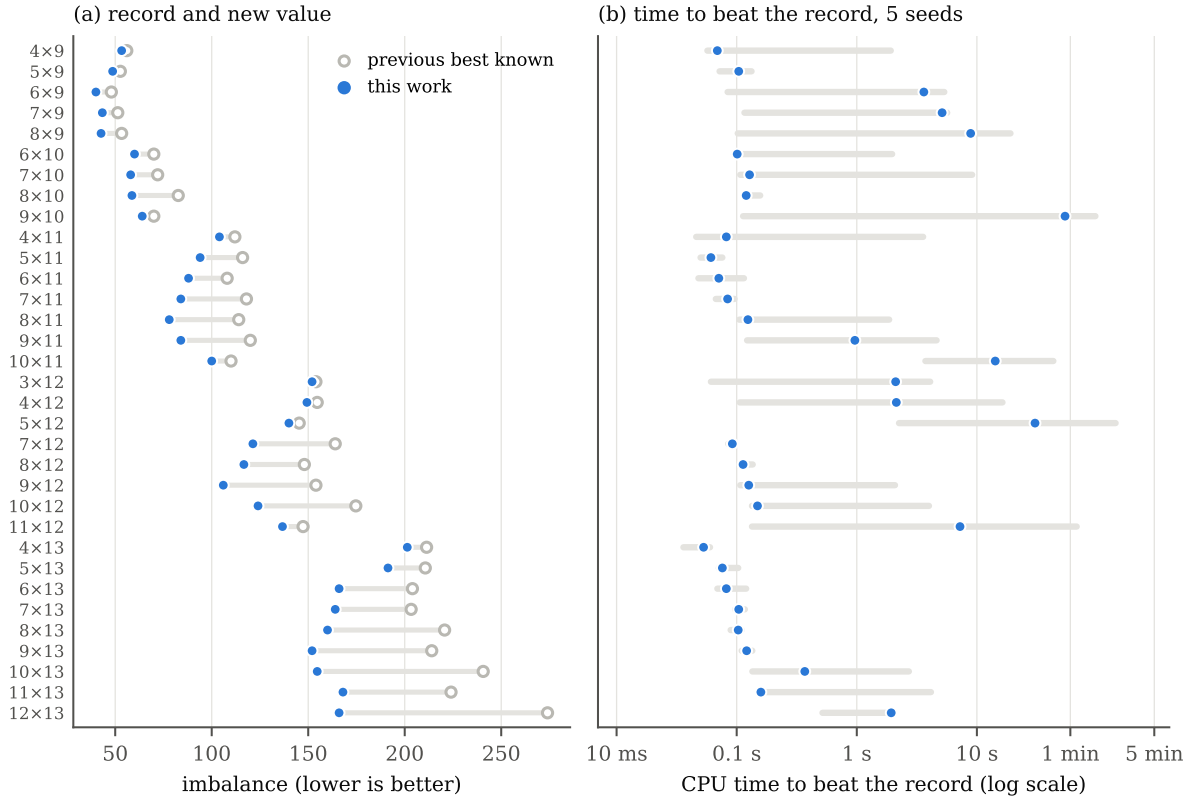


Figure 2. The 33 improved instances. (a) Previous record (open circle) and new value (filled). (b) CPU time until the search first beats the record: median (dot) and range (bar) over 5 seeds, log scale.

record (not to reach our final value) was 0.12 CPU seconds and the maximum 143 seconds. The earlier values were obtained on different hardware, under different time limits, by methods that also aim at optimality proofs or at reusable model streamlining. We therefore make no runtime comparison with them.

5 Why earlier local search stayed in the cyclic orbit

Díaz et al. [2] note that their local search, which starts from a cyclic rectangle and permutes columns, "never leaves its isotopic class". We make this precise with an invariant that detects whether a rectangle can come from a group table. It is not a complete isotopy invariant.

Definition 2. The *row group* of a Latin rectangle with rows $r_1, \dots, r_k$ is the permutation group on symbols

$$\mathrm{H}(L) = \langle\, r_i \circ r_j^{-1} : 1 \le i, j \le k \,\rangle \;\le\; \mathrm{S}_n.$$

The element $r_i \circ r_j^{-1}$ sends the symbol in column c of row j to the symbol in column c of row i. Since $r_i r_j^{-1} = (r_i r_1^{-1})(r_j r_1^{-1})^{-1}$, the group is already generated by the $k-1$ ratios $r_i r_1^{-1}$.

Proposition 3.

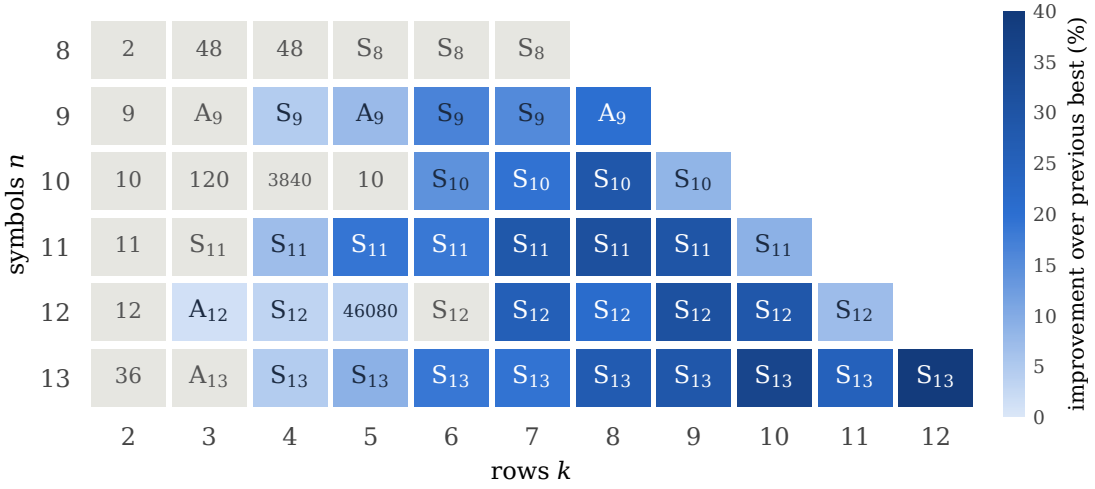


Figure 3. Row groups of our best rectangles in the benchmark range. Shading shows the improvement over the previous best value, and grey cells are matched records. Each label gives the row group: S_n or A_n, otherwise its order. Small row groups occur only among matched records.

(i) Permuting columns does not change $\mathrm{H}(L)$*. Permuting rows permutes its generators. Relabelling symbols by* σ *replaces it by* $\sigma\mathrm{H}(L)\sigma^{-1}$*. So the conjugacy class of* $\mathrm{H}(L)$ *is an isotopy invariant.*

(ii) If L *is isotopic to* k *rows of the Cayley table of a group* G *of order* n*, then* $\mathrm{H}(L)$ *is conjugate to a subgroup of the left-regular representation of* G*. In particular it acts semiregularly and* $|\mathrm{H}(L)|$ *divides* n*.*

(iii) For $i \neq 1$*, a swap in row* i *left-multiplies* $r_i r_1^{-1}$ *by a transposition and fixes the other generators. A single swap can therefore enlarge the row group. Starting from a cyclic rectangle, swaps do reach rectangles with* $\mathrm{H}(L) = \mathrm{S}_n$*, as the data below show.*

Proof. (i) Replacing every row by $r_i \circ \pi$ gives $(r_i\pi)(r_j\pi)^{-1} = r_i r_j^{-1}$. The other two statements are immediate. (ii) Up to isotopy, $r_i(c) = \sigma(a_i b_c)$ with $a_i \in G$ and $c \mapsto b_c$ a bijection onto G. Then $r_i r_j^{-1}$ maps $\sigma(a_j b)$ to $\sigma(a_i b)$, so it is $\sigma\lambda_{a_i a_j^{-1}}\sigma^{-1}$, where λ_g is left multiplication by g. (iii) Swapping two symbols in row i replaces r_i by τr_i for a transposition τ. □

So any search whose moves permute columns, or that selects rows from a cyclic Latin square, stays among rectangles whose row group is cyclic of order dividing n. Figure 3 shows the row groups of the best rectangles we found. Of the 33 improved rectangles, 29 have row group S_n and 3 have A_n. These are the largest possible groups, as for most random tuples of permutations [3], so the rectangles are as far from any group table as they can be. The exception, 5×12, has a row group of order $46080 = 2^6 \cdot 6!$, the full centraliser $\mathrm{S}_2 \wr \mathrm{S}_6$ of the pairing $u \leftrightarrow 13 - u$ of symbols, a mirror symmetry that also appears in the published 4×12 and 5×12 records.

What this does and does not explain. The row group explains why rectangles like ours are unreachable for column-based local search. It does not explain why annealing finds better upper bounds than those reported by the exact solvers. The SAT and MIP records are also non-cyclic: ten of the fourteen published rectangles have row group S_n. Those methods pursue

instance	optimum I	nodes	CPU time	status before this work
$2 \times n$, $n \leq 11$	see Figure 5	$\leq 3.8 \cdot 10^7$	≤ 1.1 s	proven [2, 10]
3×8	36.0	$7.8 \cdot 10^7$	1.9 s	proven [2, 11]
4×8	32.0	$1.9 \cdot 10^{10}$	477 s	proven [16]
3×9	**56.0**	$5.5 \cdot 10^9$	140 s	**open**
$5, 6, 7 \times 8$; 4–8×9	—	—	> 1800 s	open (undecided)

Table 2. Exact branch and bound, single core. Each run proves that no rectangle beats our upper bound. On all small instances with $n \leq 7$ and $k \leq 4$ it also reproduces the values reported in [2].

different goals, proving optimality or learning reusable streamliners, and we have not isolated which ingredient of our search matters. One plausible factor is throughput: a move costs $O(n)$, and the search makes hundreds of millions of them.

6 Exact search and a new optimum

To complement the upper bounds, we wrote a branch and bound that decides whether a rectangle with $3I < B$ exists for a given bound B.

Branching. With $r_1 = \mathrm{id}$ fixed, symbols are placed in the order $1, 2, \ldots, n$. Placing a symbol means choosing its column in each row $2, \ldots, k$, subject to the Latin conditions. This loses nothing: relabelling symbols turns any rectangle into one with $r_1 = \mathrm{id}$, and relabelling commutes with permuting rows $2, \ldots, k$. Among those rows the columns of symbol 1 are distinct, so a unique ordering makes them increase with the row index, and imbalance is invariant under both operations. When symbol u is complete, the deviations $|3d(u, v) - 3t|$ for all $v < u$ are final and are added to the cost.

Bounds. Two lower bounds prune the tree. First, every unplaced row adds at least 1 to any distance, because the two symbols occupy different columns. So while a symbol is being placed, a partial distance that exceeds t even after adding 1 for each remaining row contributes a known overshoot, and the node is pruned when the cost so far plus this overshoot reaches B. Second, when a symbol is completed, every pair that is not yet final contributes at least $m_0 = \min(3t \bmod 3,\ 3 - 3t \bmod 3)$ to $3I$, and the node is pruned when the cost plus m_0 times the number of such pairs reaches B. For $3 \times n$ and 4×8 we have $m_0 = 0$, so there the overshoot bound does all the work. Running with B equal to the value of our rectangle either finds a better rectangle or proves that none exists.

Theorem 4. *The minimum imbalance of a* 3×9 *Latin rectangle is* 56.

The upper bound is the rectangle of Figure 1. The branch and bound explores $5.5 \cdot 10^9$ nodes in 140 CPU seconds and finds no rectangle with $I < 56$. Run with the bound $3I < 169$ instead, it finds a rectangle of value 56, as a sanity check. The value 56 itself was already found by Díaz et al. [2]. To our knowledge its optimality was not known: it is listed as unproven there and in Table 1 of [16].

Table 2 summarises the runs. The method is deliberately plain: no symmetry beyond row order and symbol relabelling, and no learned bounds. It reaches its limit quickly. With

a 30-minute cap per instance, the remaining open instances with $n \in \{8, 9\}$ stay undecided. Unlike the DRAT proofs of [11], our search does not emit a checkable certificate. Theorem 4 therefore rests on the correctness of a short program, which we publish and validated on all the known optima listed above. A DRAT certificate in the style of [11] is the natural next step. The overshoot bound used for pruning may also be worth encoding there as a redundant constraint.

7 The cubic law

Why does imbalance grow so quickly with n (Table 1), and why can squares be perfectly balanced? The point picture gives a short answer. For fixed k, there is not enough room in $[n]^k$ for n points that are pairwise far apart.

Theorem 5. *Let L be a $k \times n$ Latin rectangle and $s \geq 1$ an integer, and put $B = \lceil n/s \rceil^k$. Then*

$$I(L) \;\geq\; n\Big(\frac{n}{B} - 1\Big)\Big(\frac{k(n+1)}{3} - k(s-1)\Big)$$

whenever both brackets are positive. Consequently, for every fixed k,

$$c_k \;\leq\; \liminf_{n\to\infty} \frac{\min I}{n^3} \;\leq\; \limsup_{n\to\infty} \frac{\min I}{n^3} \;\leq\; \frac{k}{3}, \qquad c_k = \max_{m\geq 4} \frac{k}{m^k}\Big(\frac{1}{3} - \frac{1}{m}\Big) > 0.$$

Proof. Cut each axis of $[n]^k$ into $\lceil n/s \rceil$ intervals of at most s consecutive values. This cuts the grid into B boxes. Two points in the same box differ by at most $s-1$ in every coordinate, so their distance is at most $k(s-1) < t$. If box b holds m_b of the n points, convexity gives

$$\sum_b \binom{m_b}{2} \;\geq\; B\binom{n/B}{2} = \frac{n}{2}\Big(\frac{n}{B} - 1\Big)$$

pairs that share a box. Each of them has $t - d \geq t - k(s-1)$. Inserting this into (1) proves the first claim. For the second, take $s = \lceil n/m \rceil$ for a fixed m. Then $B \leq m^k$ and $s - 1 < n/m$, and the bound becomes $k\,m^{-k}(\frac{1}{3} - \frac{1}{m})\,n^3 - O(n^2)$. For the upper bound, $k \leq d \leq k(n-1)$ gives $|d - t| \leq \frac{2k(n-2)}{3}$, and $\binom{n}{2} \cdot \frac{2kn}{3} \leq \frac{kn^3}{3}$. □

The proof is a pigeonhole argument, and Figure 4a shows it at work. Clustered points are expensive, and in a low-dimensional grid clustering is unavoidable. Three remarks put the theorem in context.

Remark 6 (Constants). For $k = 2$ the maximum is attained at $m = 5$, giving $c_2 = 4/375 \approx 0.0107$. For $k \geq 3$, $c_k = k/(12 \cdot 4^k)$, attained at $m = 4$. In the benchmark range the finite-n bound is weak: for 2×13 it gives 7.7, against the true optimum 218.6, and for $k = 3$ it becomes positive only at $n = 28$. Its message is asymptotic. Even the *average* deviation per pair, $I/\binom{n}{2}$, grows linearly in n, the same order as the target t itself. For fixed k, rectangles are not merely imperfect but *uniformly* imperfect.

Remark 7 (Squares). The bound is useless when k grows with n, and it must be, because spatially balanced Latin squares exist, for instance whenever $2n+1$ is prime, by a construction that was itself discovered through streamlined search [9]. In $[n]^n$ there is room for n equidistant points.

n	14	15	16	17	18	19	20
lower bound [10]	201.57	252.6	273.82	252.0	402.6	465.3	155.0
upper bound [10]	268.0	345.3	427.3	508.0	617.3	732.0	816.0
annealing (this work)	268.0	**344.6**	**422.0**	**498.0**	**610.6**	**722.6**	832.0

Table 3. $2 \times n$ rectangles beyond the proven range. The lower and upper bounds are the best over all methods and configurations in [10], from 6-hour runs. Annealing: one 2-minute single-core run. Bold: better than the previous upper bound. The lower bounds are those reached when the 6-hour limit expired, which is why they are not monotone in n.

Remark 8 (Equilateral sets). A perfectly balanced rectangle is a set of n points in $\mathbb{R}^k$ that are pairwise equidistant in ℓ_1, an *equilateral set* of ℓ_1^k. Hence $n \le e(\ell_1^k)$, the largest size of such a set. Kusner conjectured $e(\ell_1^k) = 2k$, which is known for $k \le 4$ (the case $k = 4$ is due to Koolen et al. [8]; see [13]), and Alon and Pudlák [1] proved $e(\ell_1^k) = O(k \log k)$ in general (see also the survey [13]). So a perfectly balanced $k \times n$ rectangle needs $k = \Omega(n/\log n)$ rows. For $k \le 4$ this gives $n \le 2k$, which recovers part of the case analysis of Díaz et al. [2]. Their arguments are sharper for $k \le 3$, and their bound $k \ge 6 - 18/(n+1)$ coincides with ours at $k = 4$, while theirs is vacuous for $k \ge 6$. The point sets of rectangles are far more special than general equilateral sets, since their coordinate projections are bijections onto $[n]$, so we do not expect these bounds to be tight. We have not seen this connection made in the literature on balanced designs.

8 Two rows

For $k = 2$ a rectangle is a permutation $\pi = r_2$ together with the fact that it has no fixed points, and the points $x_u = (u, \pi^{-1}(u))$ form its permutation diagram. Mirka et al. [10] solved $n \le 13$ to optimality with a clique-based MIP and reported bounds up to $n = 20$ after six hours. Table 3 adds our two-minute annealing runs. They improve the upper bound for $15 \le n \le 19$, tie at $n = 14$ and lose at $n = 20$, where the best bound of [10] came from eight parallel six-hour runs. These are single runs with one seed, the improvements are small (0.2–2%), and the MIP also spends its time on lower bounds, so the comparison shows only that annealing is a strong source of incumbents. The lower bounds remain far away, and we have not attempted to improve them.

The shape of optimal permutations. Figure 4b shows the best permutations that annealing finds for $n = 24, \dots, 64$. They are far from random. Most points lie on a few long parallel segments of slope 1, cyclically shifted against one another, with a minority of scattered points.

A limit object. A *permuton* is a probability measure on $[0,1]^2$ with uniform marginals. Every permutation σ of $[n]$ defines one, μ_σ, uniform on the squares $[\frac{i-1}{n}, \frac{i}{n}] \times [\frac{\sigma(i)-1}{n}, \frac{\sigma(i)}{n}]$. Put

$$C(\mu) = \tfrac{1}{2}\, \mathbb{E}\,\big|\, |X - X'| + |Y - Y'| - \tfrac{2}{3}\,\big|,$$

where (X, Y) and (X', Y') are independent samples of μ.

Proposition 9. *For $k = 2$, $\min I/n^3$ converges as $n \to \infty$ to $\min_\mu C(\mu)$, where the minimum over permutons is attained.*

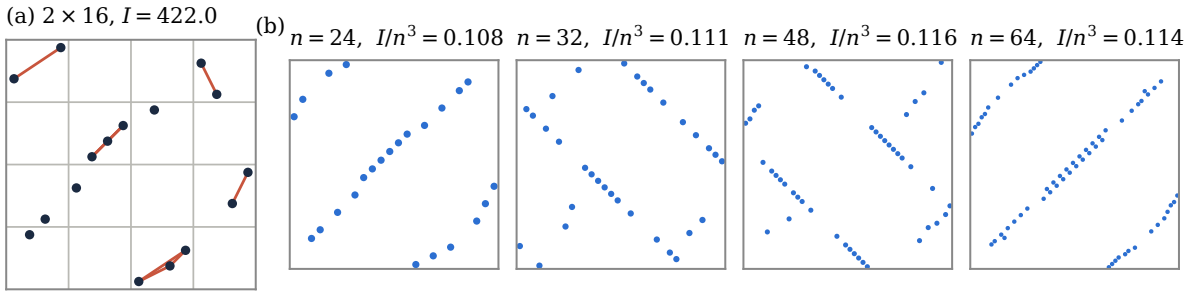


Figure 4. $2 \times n$ rectangles as point sets. (a) The proof of Theorem 5 for a 2×16 rectangle with $I = 422$: a 4×4 grid of boxes, and in red the pairs that share a box. Each such pair is closer than the average $t = 34/3$ and costs imbalance. (b) The best rectangles found by annealing for larger n (one 2-minute run each), rescaled to the unit square. Most points lie on a few long parallel diagonal runs, with scattered extra points.

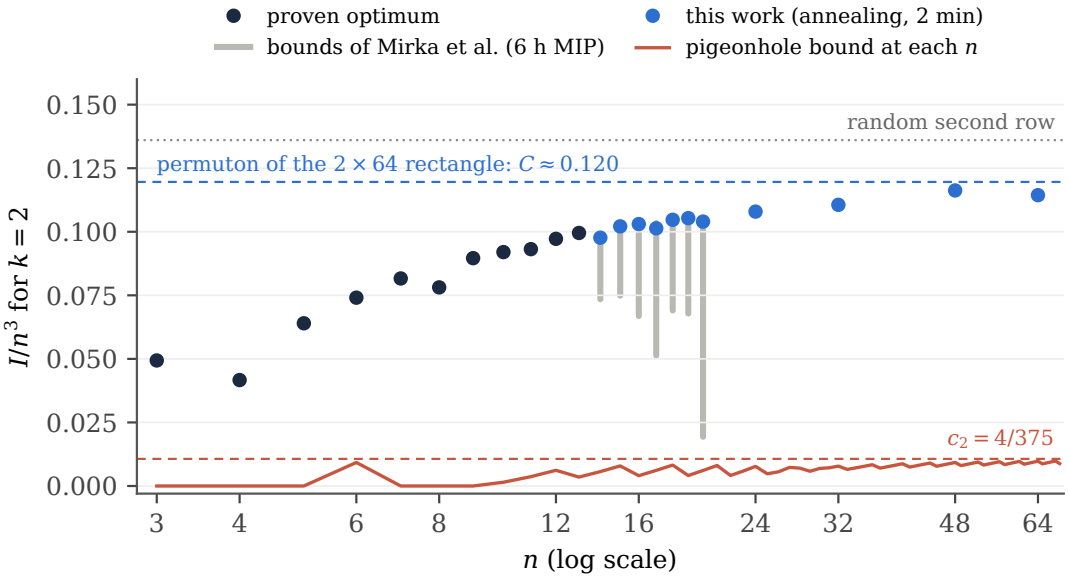


Figure 5. Normalised imbalance I/n^3 for $k = 2$. Black: proven optima. Grey: interval between the best lower and upper bounds of [10]. Blue dots: our annealing values; blue dashes: $C(\mu_\sigma)$ for our 2×64 rectangle, an upper estimate for the limit (Proposition 9). Red: Theorem 5 at each n (solid) and its limit c_2 (dashed). A uniformly random derangement has $I/n^3 \to 0.1361$ (dotted).

Proof sketch. The integrand is bounded and continuous on $[0,1]^4$, so C is continuous for the weak topology. Permutons form a compact set, so the minimum is attained. For any permutation σ, comparing the sum defining I with the integral defining $C(\mu_\sigma)$ cell by cell (the n diagonal cells, absent from I, have total weight $1/n$) gives $I/n^3 = C(\mu_\sigma) + O(1/n)$, because the integrand is Lipschitz and $t/n \to \frac{2}{3}$. This yields $\liminf \min I/n^3 \geq \min C$. Conversely, permutations σ_n with $\mu_{\sigma_n} \to \mu$ exist for every permuton μ (sample n points from μ; see [6]). Removing fixed points by swapping each with an adjacent column, which never creates a new fixed point, changes I by $O(n)$ per fixed point, so by $O(n^2)$ in total, which gives the matching upper bound. □

The uniform permuton gives $C = 496/3645 \approx 0.1361$, the limit for a random derangement,

and the diagonal (the cyclic rectangle) gives $16/81 \approx 0.198$. Optimising numerically over permutons made of m increasing or decreasing segments gives 0.148, 0.133 and 0.124 for $m = 3, 4, 5$. The permuton of our 2×64 rectangle does better, with $C(\mu_\sigma) \approx 0.120$ by numerical quadrature, and this is our best estimate from above for the limit. The finite values $I/n^3 \approx 0.11$ in Figure 5 lie below it mainly because the diagonal cells add a positive $O(1/n)$ term to $C(\mu_\sigma)$, so as estimates of the limit they are biased low by roughly c/n.

Question. What is $\lim_n \min I(2 \times n)/n^3 = \min_\mu C(\mu)$? We know only that it lies between $4/375 \approx 0.011$ and about 0.120. Is the minimiser unique, and is it a finite union of segments?

9 Discussion

The three parts of this paper inform one another. The point picture says that balance is a packing problem in ℓ_1, so moving points is the natural move. The row group says that moves which only shuffle columns cannot leave a cyclic orbit, while within-row swaps can reach rectangles whose row group is all of S_n. The cubic law gives the right scale. Imbalance is not a small defect that clever search will remove, but a quantity of order n^3 whose leading constant is the real object of study.

Limitations. The new upper bounds come from one run per instance and budget, so the search is not a controlled experiment. We did not isolate the effect of the adaptive penalty or rerun earlier local search head-to-head. We make no runtime comparison with earlier work. The optimality of 3×9 rests on an uncertified program. Our lower-bound theorem is far from the observed values for $k = 2$ and is negligible in the benchmark range.

Open problems. (1) Certify Theorem 4, for instance with a DRAT-producing SAT encoding as in [11], and settle 5×8 to 7×8. Our new upper bounds are natural starting incumbents for certified solvers, and the mirror pairing $u \leftrightarrow n+1-u$ seen in several records is a candidate streamliner in the sense of [16]. (2) Close the gap between $c_2 = 0.0107$ and 0.120. A sharper lower bound might weight pairs by distance instead of counting close pairs in boxes. (3) Determine the minimising permuton for $k = 2$. (4) Prove Kusner's conjecture for ℓ_1, which would show that perfectly balanced $k \times n$ rectangles need $k \geq n/2$.

Data and code. Rectangles, the annealing code, the branch and bound, the exact checker and the scripts for every figure are at
`https://github.com/BrianLi009/Balanced-Latin-Rectangles`.

References

[1] Noga Alon and Pavel Pudlák. Equilateral sets in l_p^n. *Geometric and Functional Analysis*, 13(3):467–482, 2003. doi: 10.1007/s00039-003-0418-7.

[2] Mateo Díaz, Ronan Le Bras, and Carla P. Gomes. In search of balance: The challenge of generating balanced Latin rectangles. In *Integration of AI and OR Techniques in Constraint Programming (CPAIOR 2017)*, volume 10335 of *Lecture Notes in Computer Science*, pages 68–76. Springer, 2017. doi: 10.1007/978-3-319-59776-8_6.

[3] John D. Dixon. The probability of generating the symmetric group. *Mathematische Zeitschrift*, 110:199–205, 1969. doi: 10.1007/BF01110210.

[4] Fred Glover and Jin-Kao Hao. The case for strategic oscillation. *Annals of Operations Research*, 183(1):163–173, 2011. doi: 10.1007/s10479-009-0597-1.

[5] Carla P. Gomes and Meinolf Sellmann. Streamlined constraint reasoning. In *Principles and Practice of Constraint Programming (CP 2004)*, volume 3258 of *Lecture Notes in Computer Science*, pages 274–289. Springer, 2004. doi: 10.1007/978-3-540-30201-8_22.

[6] Carlos Hoppen, Yoshiharu Kohayakawa, Carlos Gustavo Moreira, Balázs Ráth, and Rudini Menezes Sampaio. Limits of permutation sequences. *Journal of Combinatorial Theory, Series B*, 103(1):93–113, 2013. doi: 10.1016/j.jctb.2012.09.003.

[7] Scott Kirkpatrick, C. Daniel Gelatt, and Mario P. Vecchi. Optimization by simulated annealing. *Science*, 220(4598):671–680, 1983. doi: 10.1126/science.220.4598.671.

[8] Jack Koolen, Monique Laurent, and Alexander Schrijver. Equilateral dimension of the rectilinear space. *Designs, Codes and Cryptography*, 21:149–164, 2000. doi: 10.1023/A:1008391712305.

[9] Ronan Le Bras, Carla P. Gomes, and Bart Selman. From streamlined combinatorial search to efficient constructive procedures. In *Proceedings of the Twenty-Sixth AAAI Conference on Artificial Intelligence*, pages 499–506, 2012. doi: 10.1609/aaai.v26i1.8147.

[10] Renee Mirka, Laura Greenstreet, Marc Grimson, and Carla P. Gomes. A new approach to finding $2 \times n$ partially spatially balanced Latin rectangles (short paper). In *29th International Conference on Principles and Practice of Constraint Programming (CP 2023)*, volume 280 of *LIPIcs*, pages 47:1–47:11. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2023. doi: 10.4230/LIPIcs.CP.2023.47.

[11] Vaidyanathan Peruvemba Ramaswamy and Stefan Szeider. Proven optimally-balanced Latin rectangles with SAT (short paper). In *29th International Conference on Principles and Practice of Constraint Programming (CP 2023)*, volume 280 of *LIPIcs*, pages 48:1–48:10. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2023. doi: 10.4230/LIPIcs.CP.2023.48.

[12] Casey Smith, Carla P. Gomes, and Cèsar Fernández. Streamlining local search for spatially balanced Latin squares. In *Proceedings of the Nineteenth International Joint Conference on Artificial Intelligence (IJCAI-05)*, pages 1539–1540, 2005.

[13] Konrad J. Swanepoel. Equilateral sets in finite-dimensional normed spaces, 2004. arXiv:math/0406264.

[14] H. M. van Es and C. L. van Es. Spatial nature of randomization and its effect on the outcome of field experiments. *Agronomy Journal*, 85(2):420–428, 1993. doi: 10.2134/agronj1993.00021962008500020046x.

[15] Florentina Voboril and Stefan Szeider. Improving constraint models with LLM agents, 2026. arXiv:2608.08127.

[16] Florentina Voboril, Vaidyanathan Peruvemba Ramaswamy, and Stefan Szeider. Balancing Latin rectangles with LLM-generated streamliners. In *31st International Conference on Principles and Practice of Constraint Programming (CP 2025)*, volume 340 of *LIPIcs*, pages 36:1–36:17. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2025. doi: 10.4230/LIPIcs.CP.2025.36.

[17] Hai Xia, Carla P. Gomes, Bart Selman, and Stefan Szeider. Agentic neurosymbolic collaboration for mathematical discovery: A case study in combinatorial design, 2026. arXiv:2603.08322.

[18] Zhenxuan Xie, Zhipeng Lü, Zhouxing Su, Chu-Min Li, Junwen Ding, and Yuxuan Wang. A swap relaxation-based local search for the Latin square completion problem. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence (IJCAI-24)*, pages 7047–7055, 2024. doi: 10.24963/ijcai.2024/779.

[19] Cheng Zhang and Jianpeng Ma. Counting solutions for the N-queens and Latin square problems by efficient Monte Carlo simulations, 2008. arXiv:0808.4003.